

## SAR-2013-03-S2

### WR-03 Pyramidal Horn Antenna, 20 dBi Gain

**SAR-2013-03-S2** is a pyramidal horn antenna that operates from 220 GHz to 325 GHz. The antenna offers 20 dBi nominal gain and a typical half power beamwidth of 13 degrees on the E-plane and 13 degrees on the H-plane. The antenna supports linear polarized waveforms. The input of this antenna is a WR-03 waveguide with UG-387/U anti-cocking flange.



#### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	220 GHz		325 GHz
Gain		20 dBi	
Polarization		Linear	
3 dB Beamwidth, E-Plane		13°	
3 dB Beamwidth, H-Plane		13°	
Sidelobes, E-Plane		-12 dB	
Sidelobes, H-Plane		-25 dB	
Return Loss		22 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

#### Mechanical Specifications:

Item	Specification
Antenna Port	WR-03 Waveguide
Flange Type	UG-387/U Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	0.6 Oz
Size	0.65" (L) X 0.75" (Ø)
Outline	AR-031-A

#### ECCN

EAR99

#### FEATURES

- Rectangular Waveguide Interface
- Precisely Machined and Gold Plated
- Linear Polarization
- High Return Loss


#### APPLICATIONS

- Antenna Ranges
- Antenna Gain Measurements
- System Setups


#### SUPPLEMENTAL DETAILS




### Simulated Antenna Patterns @ 220 GHz

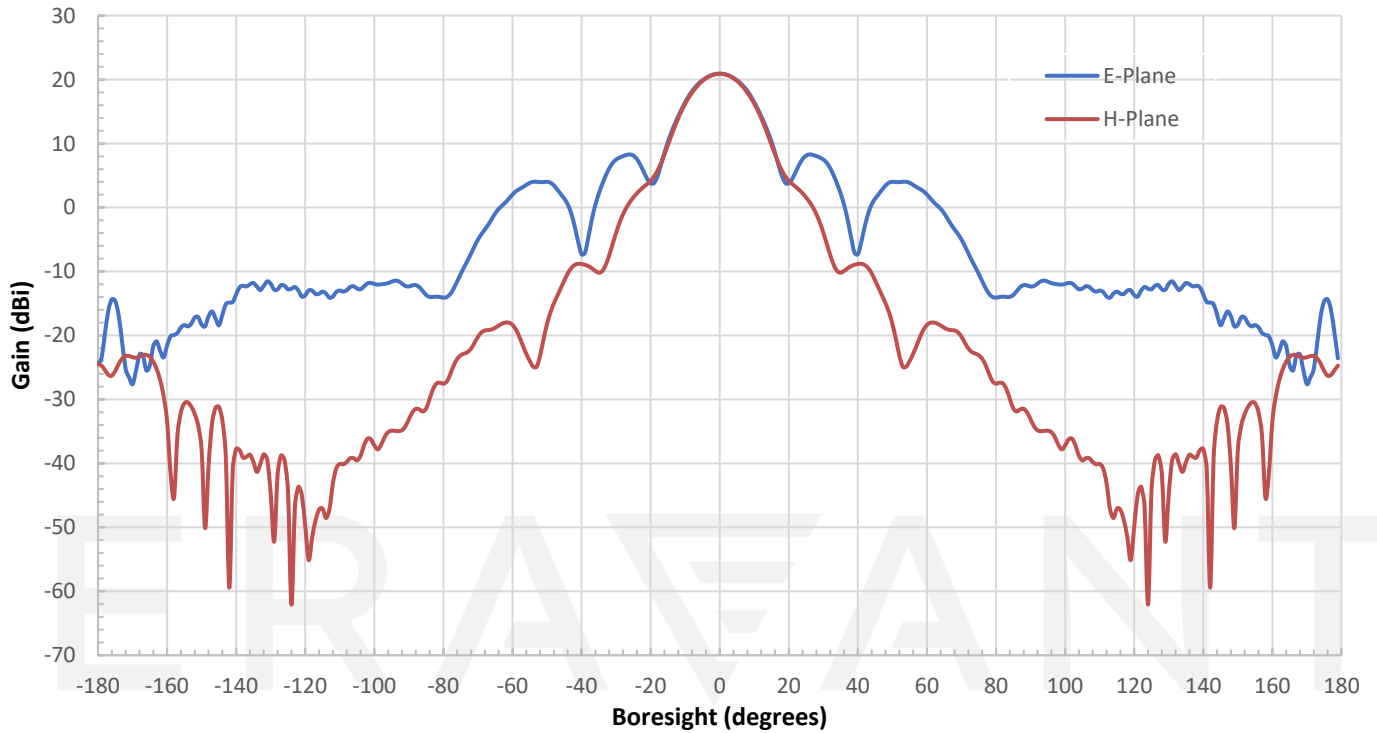


### Simulated Antenna Patterns @ 275 GHz

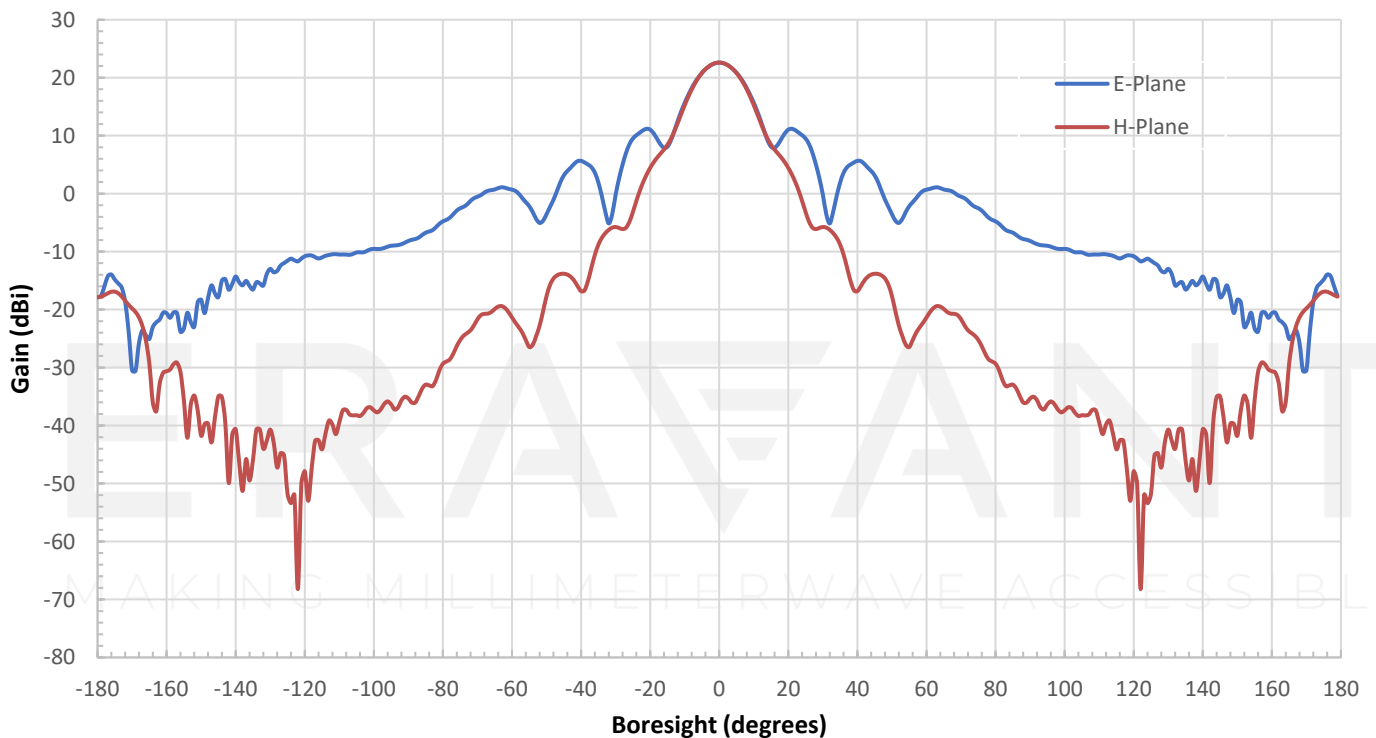


### Simulated Antenna Patterns @ 325 GHz

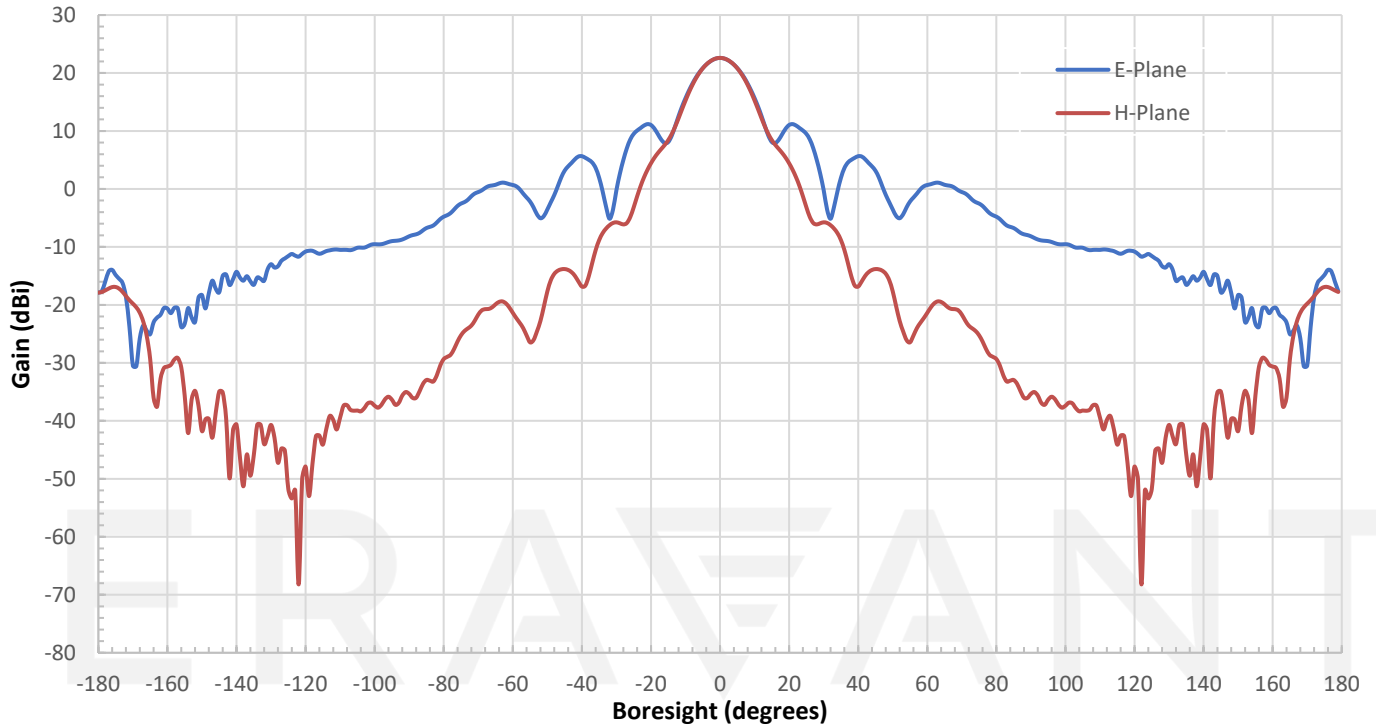


### Simulated Return Loss vs. Frequency

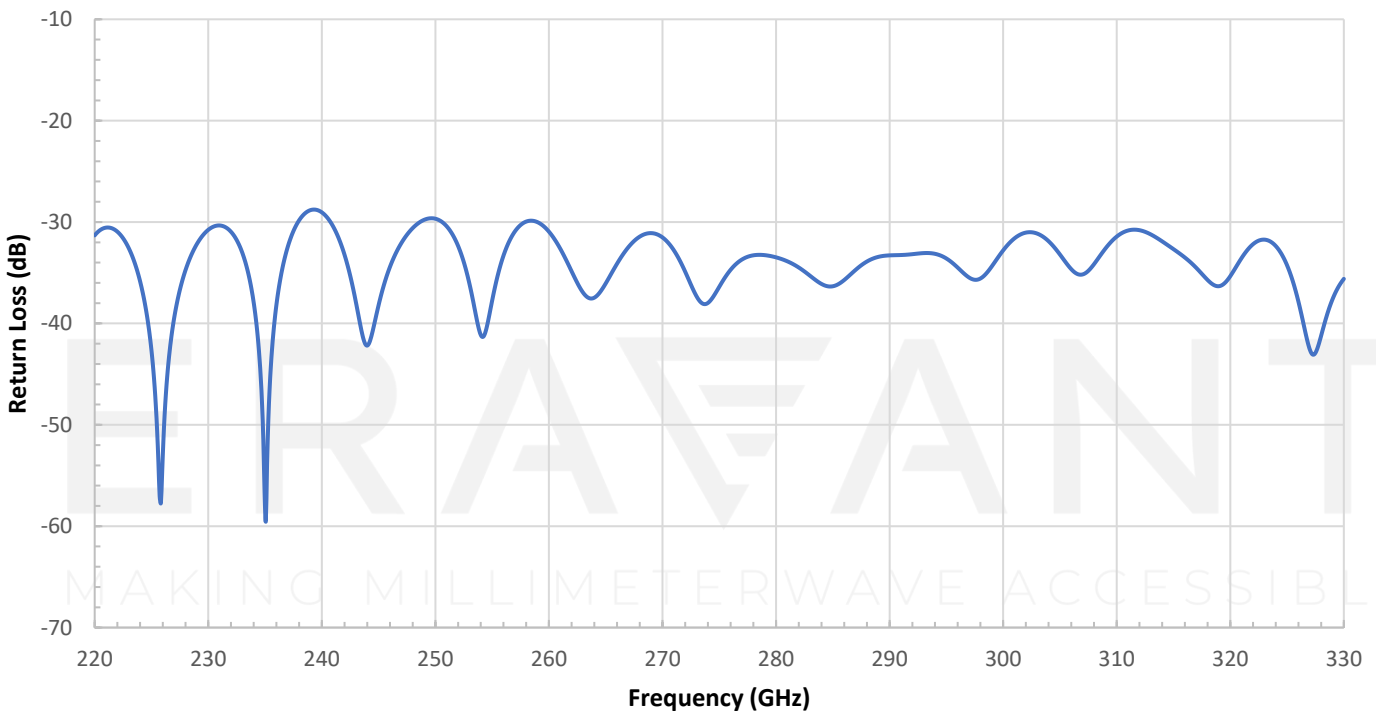

### Simulated Gain vs. Frequency

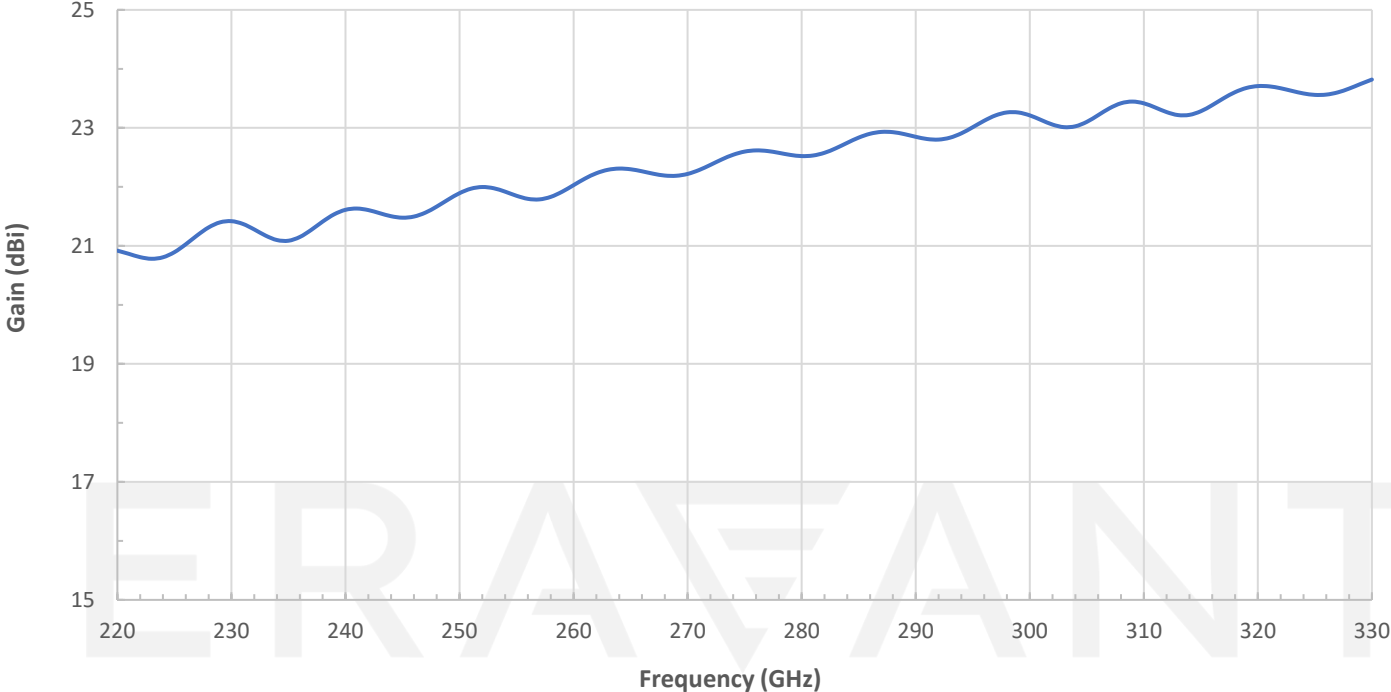

**Mechanical Outline:** Unless otherwise specified, all dimensions are in inches [millimeters]

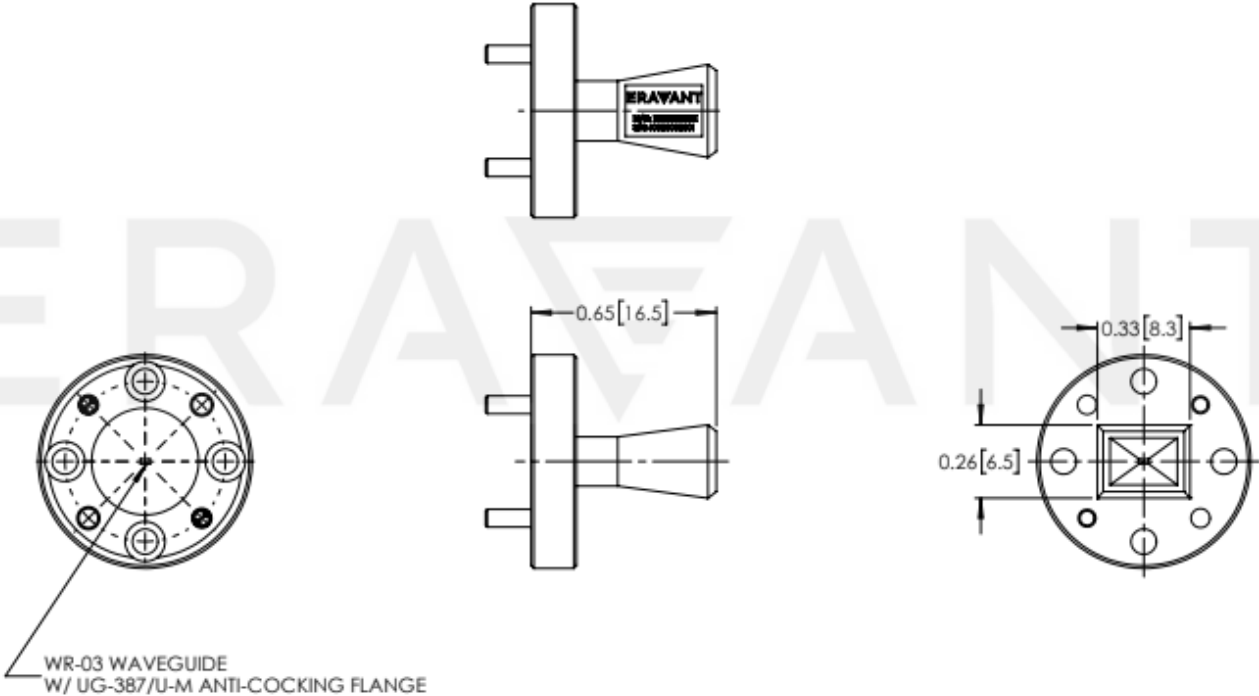

**NOTE:**

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE