



WR-22 Pyramidal Horn Antenna, 23 dBi Gain with 1.85 mm Coax Input

Description:

Model SAR-2309-22VF-R2 is a Q-band pyramidal horn antenna with a right angle (90°) 1.85 mm (F) coax connector to cover the frequency range of 33 GHz to 50 GHz. The antenna offers 23 dBi nominal gain and a typical half power beamwidth of 10 degrees on the E-plane and 11 degrees on the H-plane. The antenna supports linear polarized waveforms. End launch (180°) 1.85 mm connector configurations are available under models **SAR-2309-22VF-E2** and **SAR-2309-22VM-E2**.



Features:

- Inline Configuration
- Linear Polarization
- DC Open Circuit at Input

Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Gain	21.5 dBi	23 dBi	24 dBi
Polarization	Linear		
3 dB Beamwidth, E-Plane		10°	
3 dB Beamwidth, H-Plane		11°	
Sidelobes, E-Plane		-14 dB	
Sidelobes, H-Plane		-30 dB	
Return Loss		18 dB	
Power Handling			30 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-45 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port (F)	1.85 mm Female for Model Number : SAR-2309-22VF-R2
Antenna Port (M)	1.85 mm Male for Model Number : SAR-2309-22VM-R2
Size	4.70" (L) X 1.86" (W) X 1.51" (H)
Material	Aluminum
Finish	Gold Plated
Connector Material	Stainless Steel
Weight	1.5 Oz
Outline	AR-QC2-R






WR-22 Pyramidal Horn Antenna, 23 dBi Gain with 1.85 mm Coax Input

Typical Antenna Pattern @ 41.5 GHz

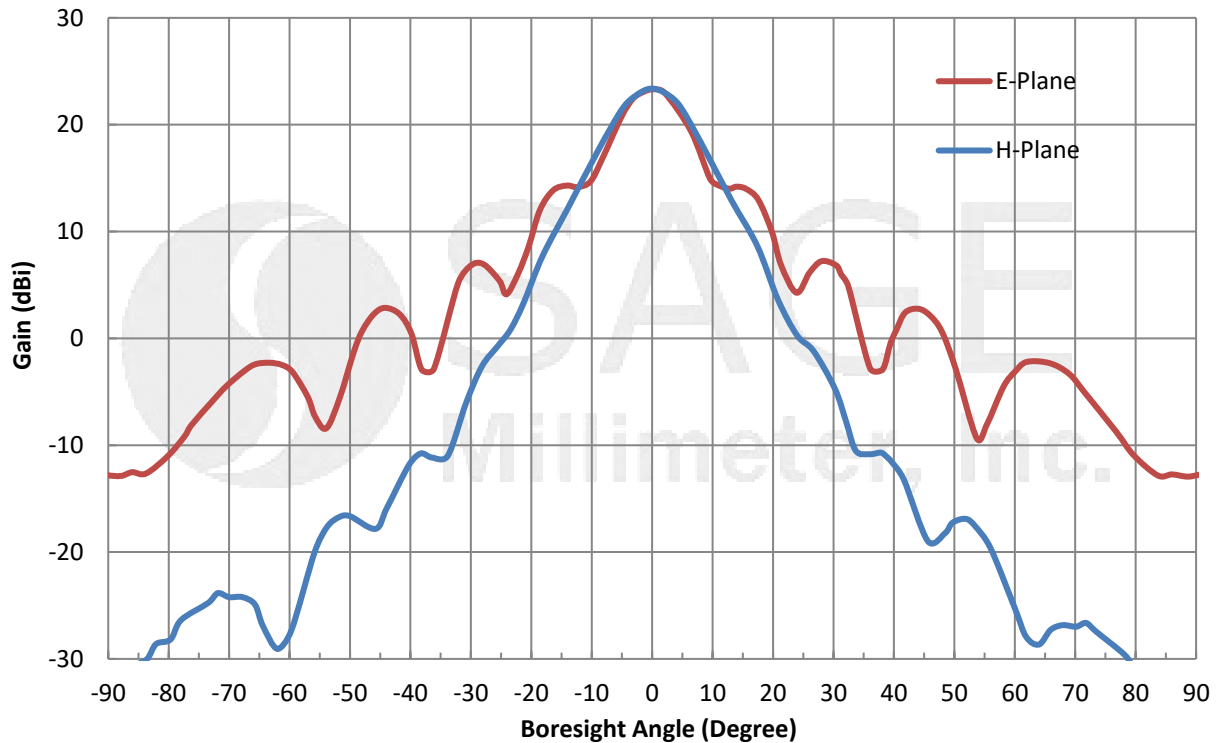


Typical Gain vs. Frequency

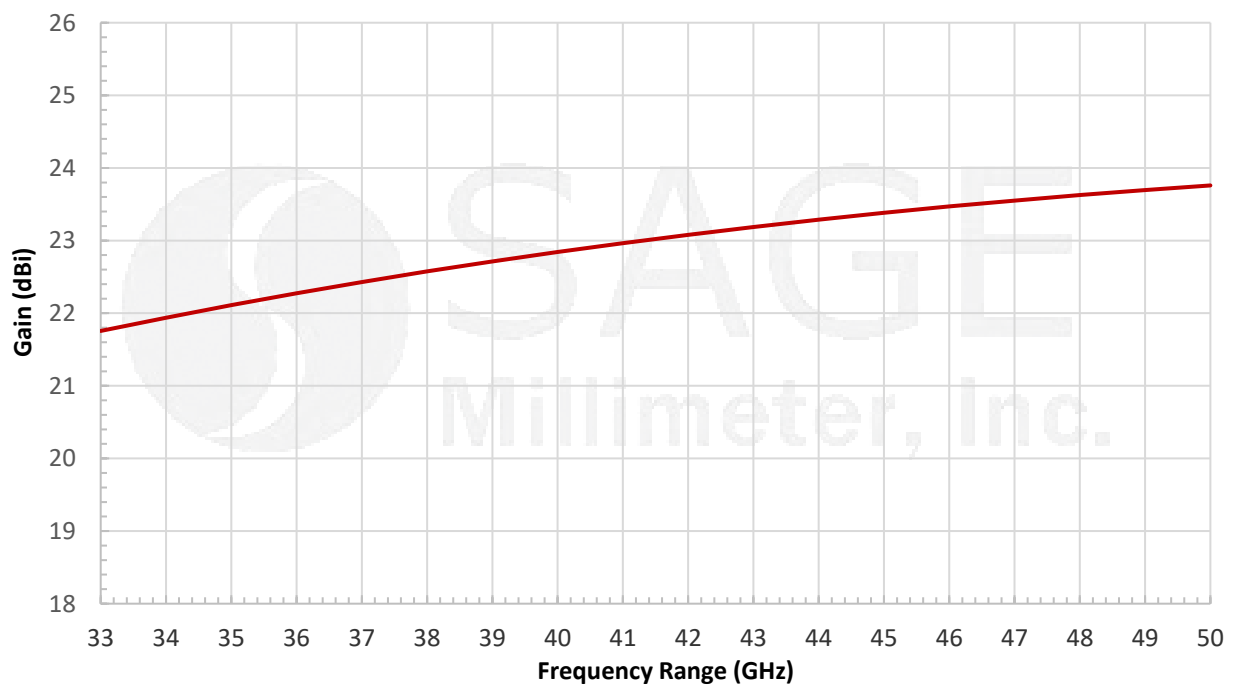




WR-22 Pyramidal Horn Antenna, 23 dBi Gain with 1.85 mm Coax Input

Typical Measured Return Loss vs Frequency

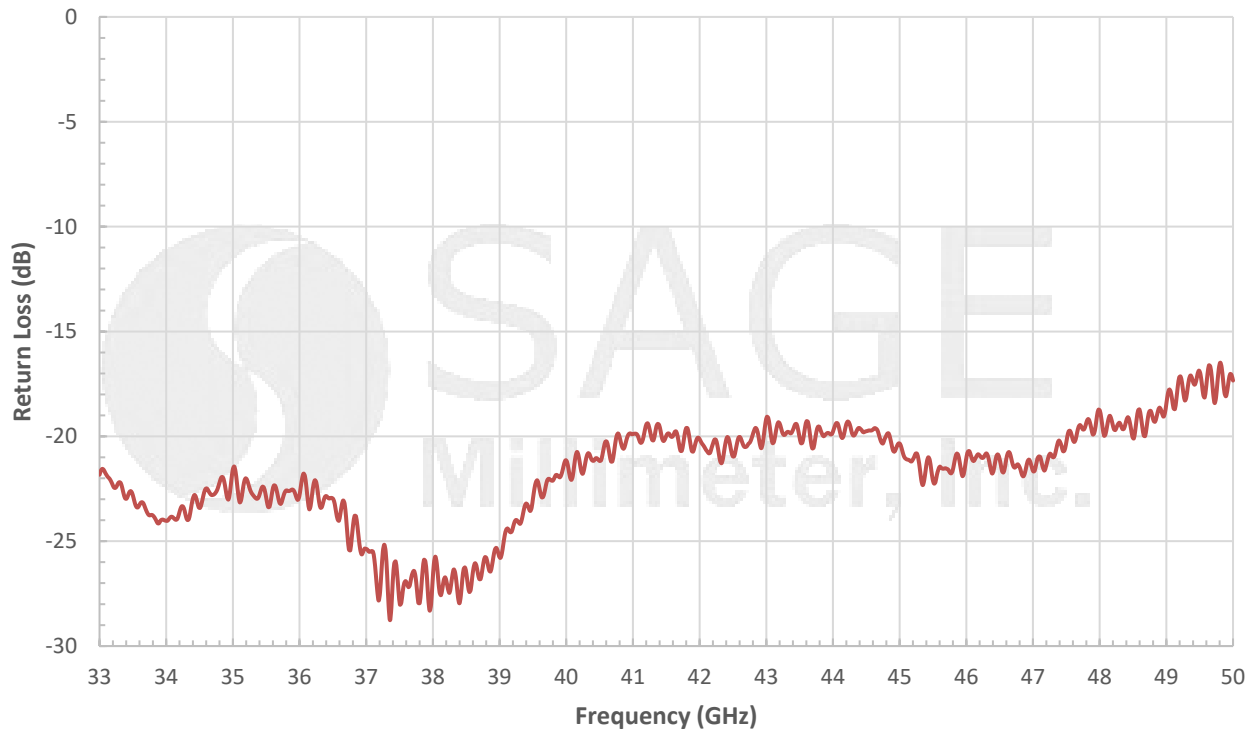

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

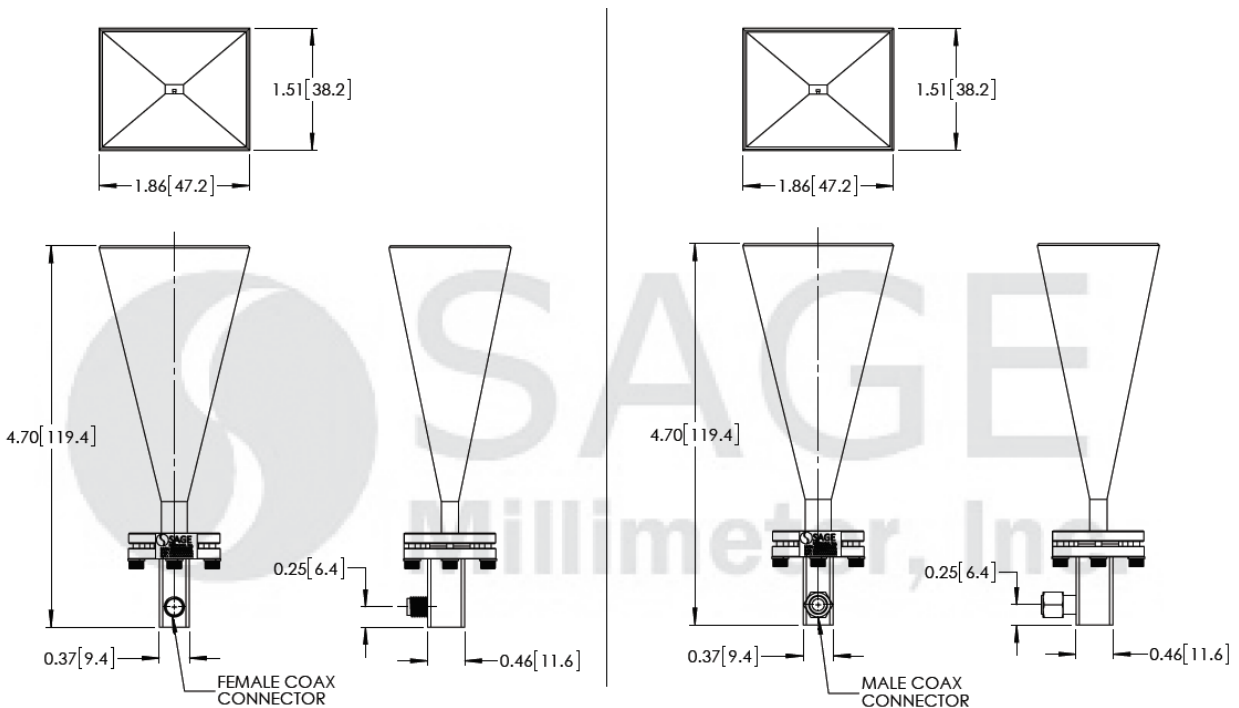

WR-22 Pyramidal Horn Antenna, 23 dBi Gain with 1.85 mm Coax Input

Note:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- All testing was performed under +25°C room temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

