



WR-28 Pyramidal Horn Antenna, 23 dBi Gain with 1.85 mm (V) Coax Input

Description:

Models SAR-2309-28VF-R2 and SAR-2309-28VM-R2 are Ka-band pyramidal horn antennas with right angle (90°) 1.85 mm coax connectors to cover the frequency range of 26.5 GHz to 40 GHz. The antennas offer 23 dBi nominal gain and a typical half power beamwidth of 10 degrees on the E-plane and 11 degrees on the H-plane. The antennas supports linear polarized waveforms.



Features:

- Inline Configuration
- Linear Polarization
- DC Open Circuit at Input

Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|----------|---------|-----------|
| Frequency | 26.5 GHz | | 40 GHz |
| Gain | 21.5 dBi | 23 dBi | 24 dBi |
| Polarization | Linear | | |
| 3 dB Beamwidth, E-Plane | | 10° | |
| 3 dB Beamwidth, H-Plane | | 11° | |
| Sidelobes, E-Plane | | -14 dB | |
| Sidelobes, H-Plane | | -30 dB | |
| Return Loss | | 20 dB | |
| Power Handling | | | 30 W (CW) |
| Specification Temperature | | +25 °C | |
| Operating Temperature | -45 °C | | +85 °C |

Mechanical Specifications:


| Item | Specification |
|--------------------|---|
| Antenna Port (F) | 1.85 mm Female for Model Number: SAR-2309-28VF-R2 |
| Antenna Port (M) | 1.85 mm Male for Model Number: SAR-2309-28VM-R2 |
| Size | 5.40" (L) X 2.30" (W) X 1.86" (H) |
| Material | Aluminum |
| Connector Material | Stainless Steel |
| Finish | Gold Plated |
| Weight | 2.0 Oz |
| Outline | AR-AC2-R2 |






WR-28 Pyramidal Horn Antenna, 23 dBi Gain with 1.85 mm (V) Coax Input

Typical Antenna Pattern @ 33.25 GHz

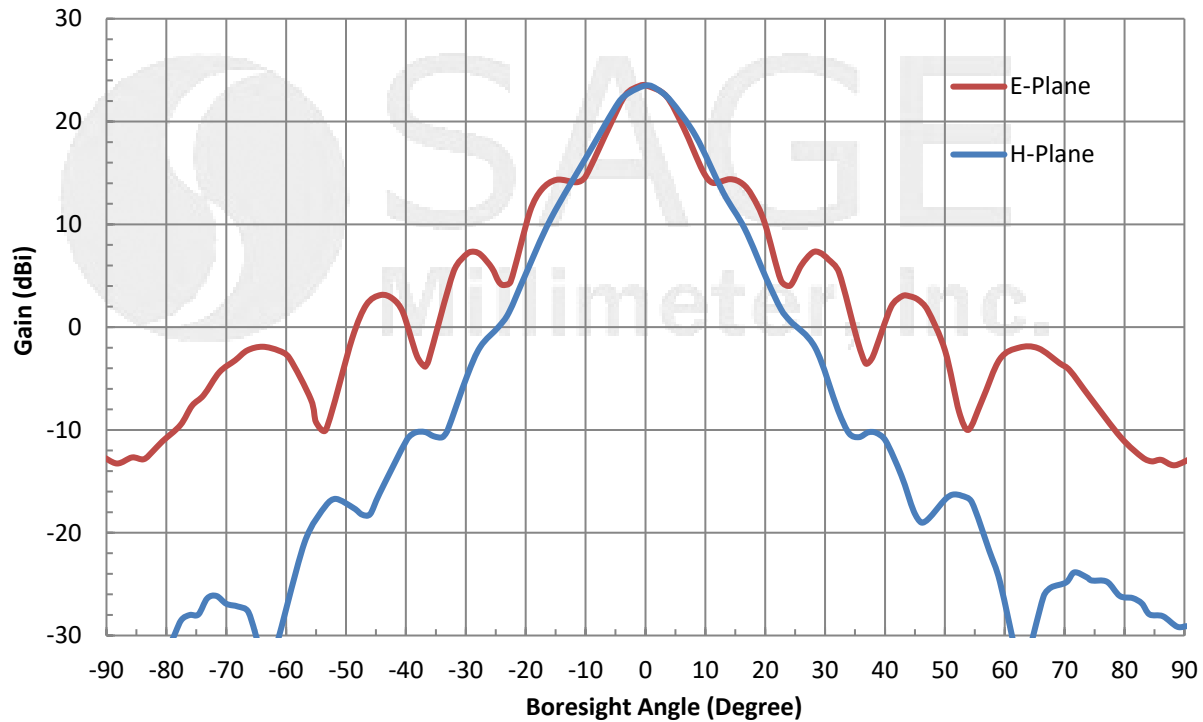


Typical Gain vs. Frequency

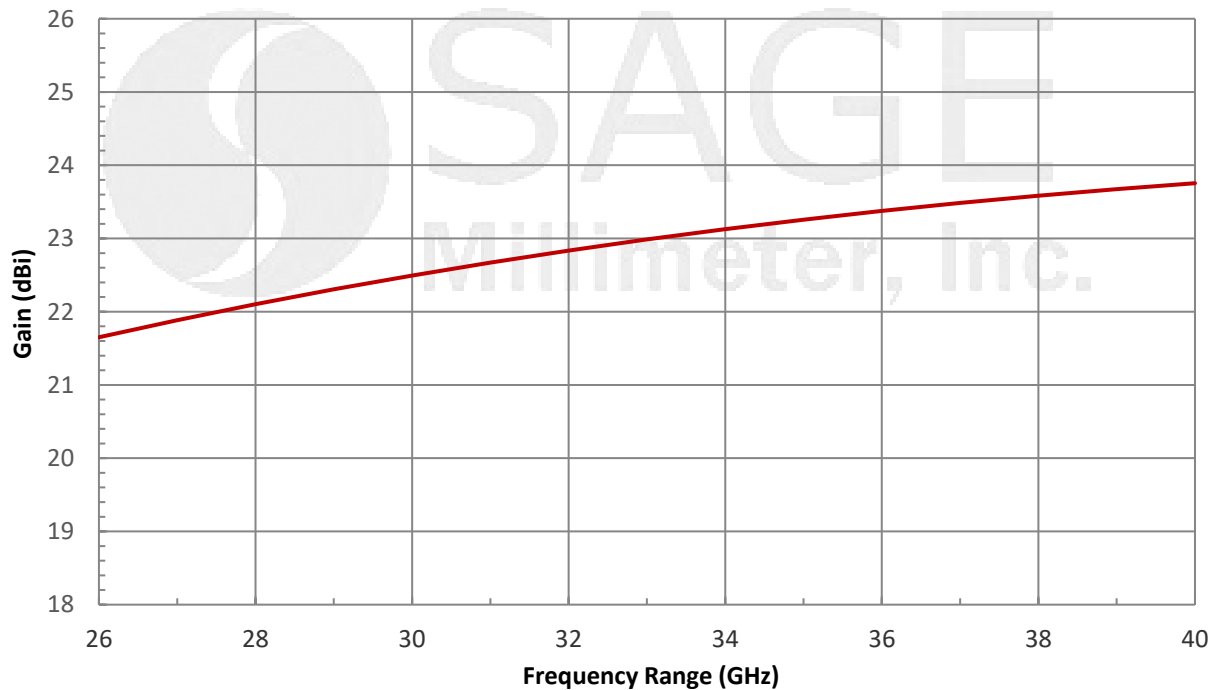


WR-28 Pyramidal Horn Antenna, 23 dBi Gain with 1.85 mm (V) Coax Input

Typical Measured Return Loss vs. Frequency

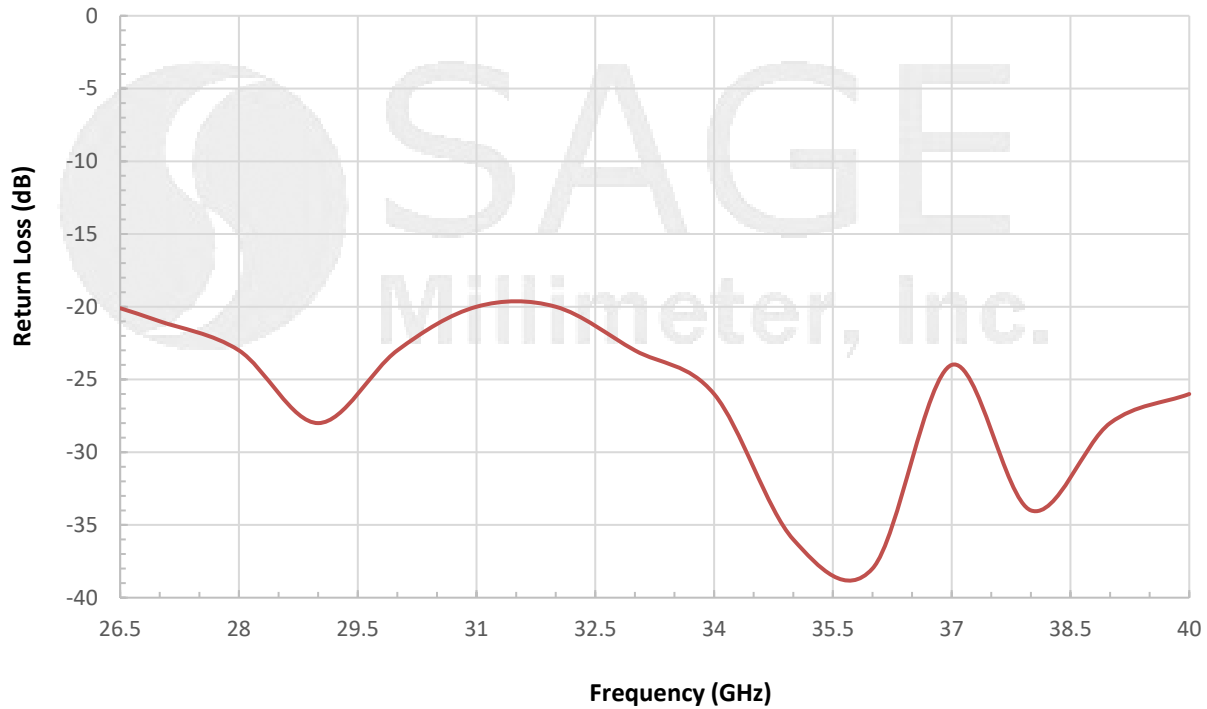

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

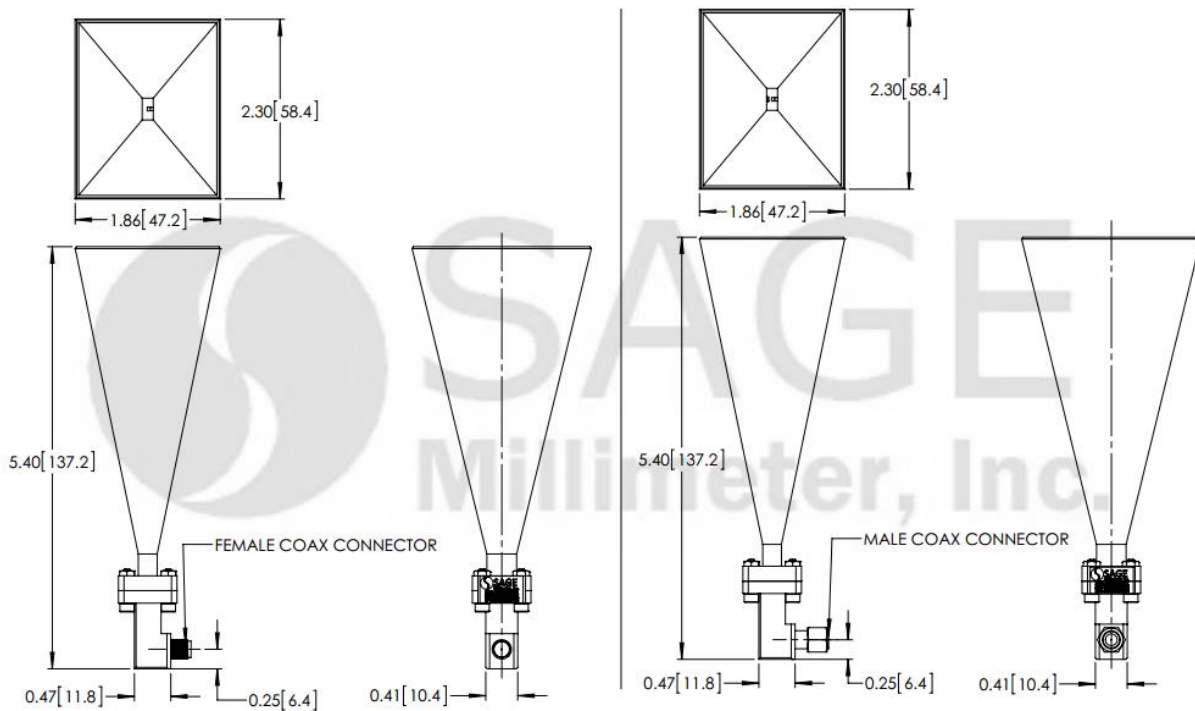

WR-28 Pyramidal Horn Antenna, 23 dBi Gain with 1.85 mm (V) Coax Input

Note:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- All testing was performed under 25°C room temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

