


SAR-2507-42-S3

WR-42 Pyramidal Horn Antenna, 26 dBi Gain

SAR-2507-42-S3 is a K-band pyramidal horn antenna that operates from 18 GHz to 26.5 GHz. The antenna offers 26 dBi nominal gain and a typical half power beamwidth of 8 degrees on the E-plane and H-plane. The antenna supports linear polarized waveforms. The input of this antenna is a WR42 waveguide with UG-595/U flange.

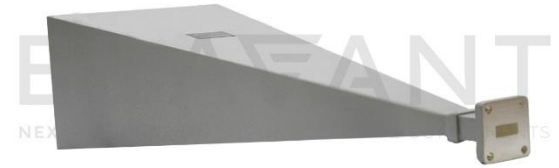

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	18 GHz		26.5 GHz
Gain	24.5 dBi	26 dBi	27 dBi
Polarization		Linear	
3 dB Beamwidth, E-Plane		8°	
3 dB Beamwidth, H-Plane		8°	
Sidelobes, E-Plane		-10 dB	
Sidelobes, H-Plane		-25 dB	
Return Loss		30 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Antenna Ports	WR-42 Waveguide
Flange Type	UG-595/U Flange
Material	Copper
Finish	Inside: Silver Plated; Outside: Gray Paint
Weight	2.1 lbs
Size	13.78" (L) X 4.72" (W) X 3.35" (H)
Outline	AR-K3-H1

ECCN

EAR99

FEATURES

- Rectangular Waveguide Interface
- Precisely Machined
- Linear Polarization
- High Return Loss

APPLICATIONS


- Antenna Ranges
- Antenna Gain Measurements
- System Setups

SUPPLEMENTAL DETAILS




SAR-2507-42-S3


Simulated Antenna Patterns @ 18 GHz

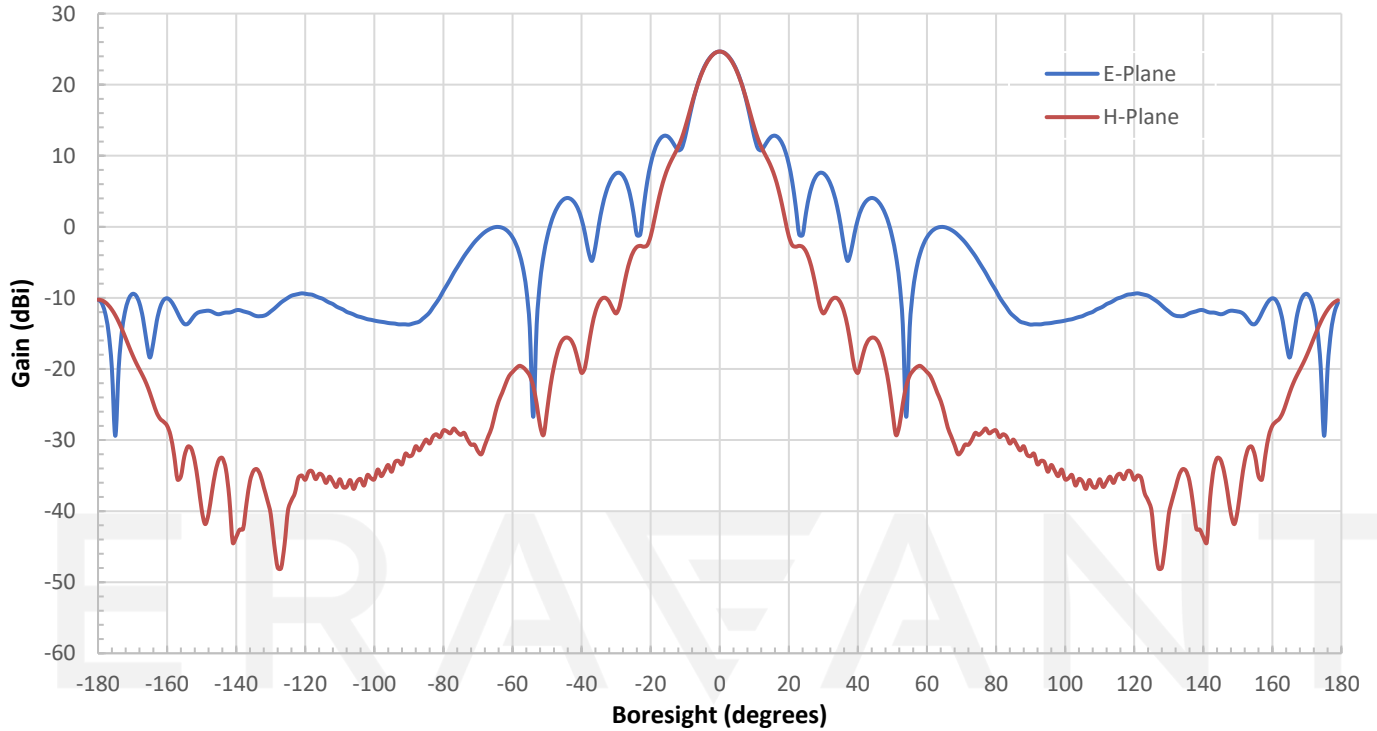


Simulated Antenna Patterns @ 22 GHz

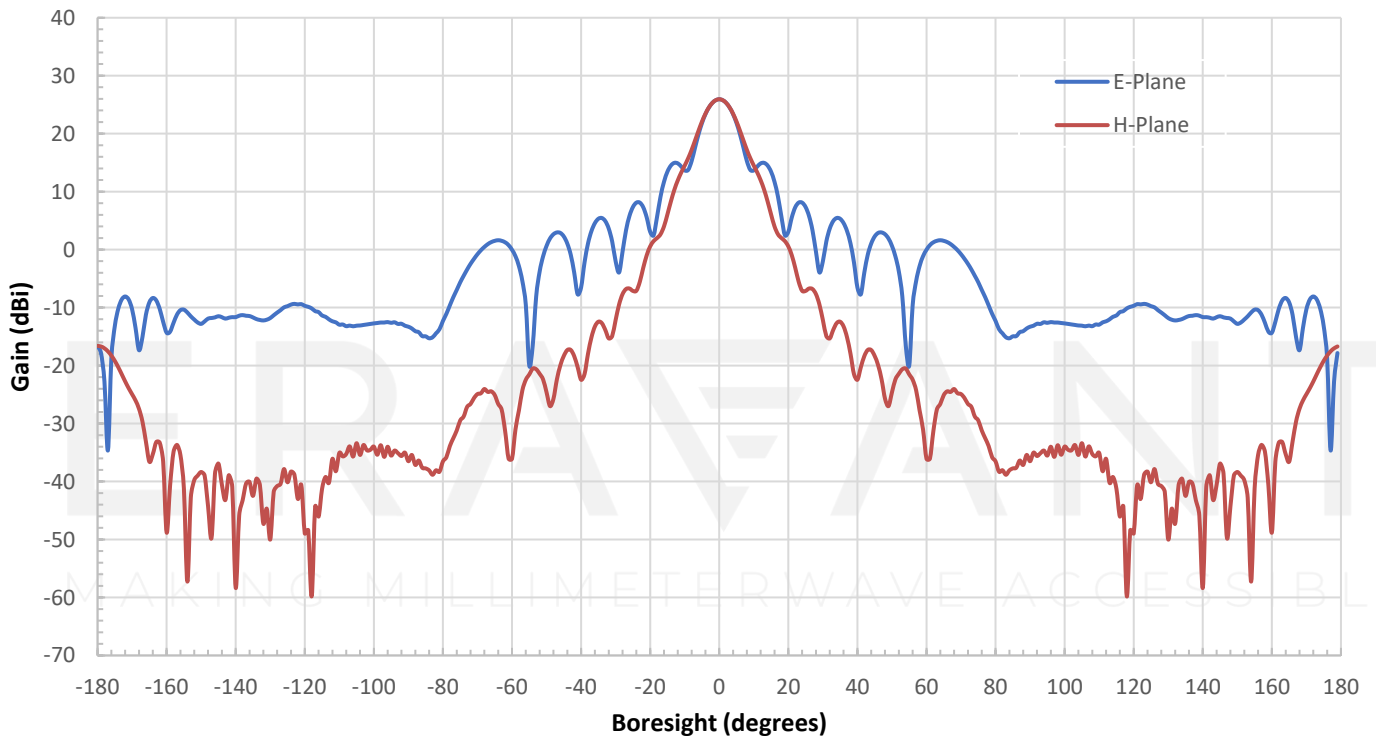

Simulated Antenna Patterns @ 26.5 GHz

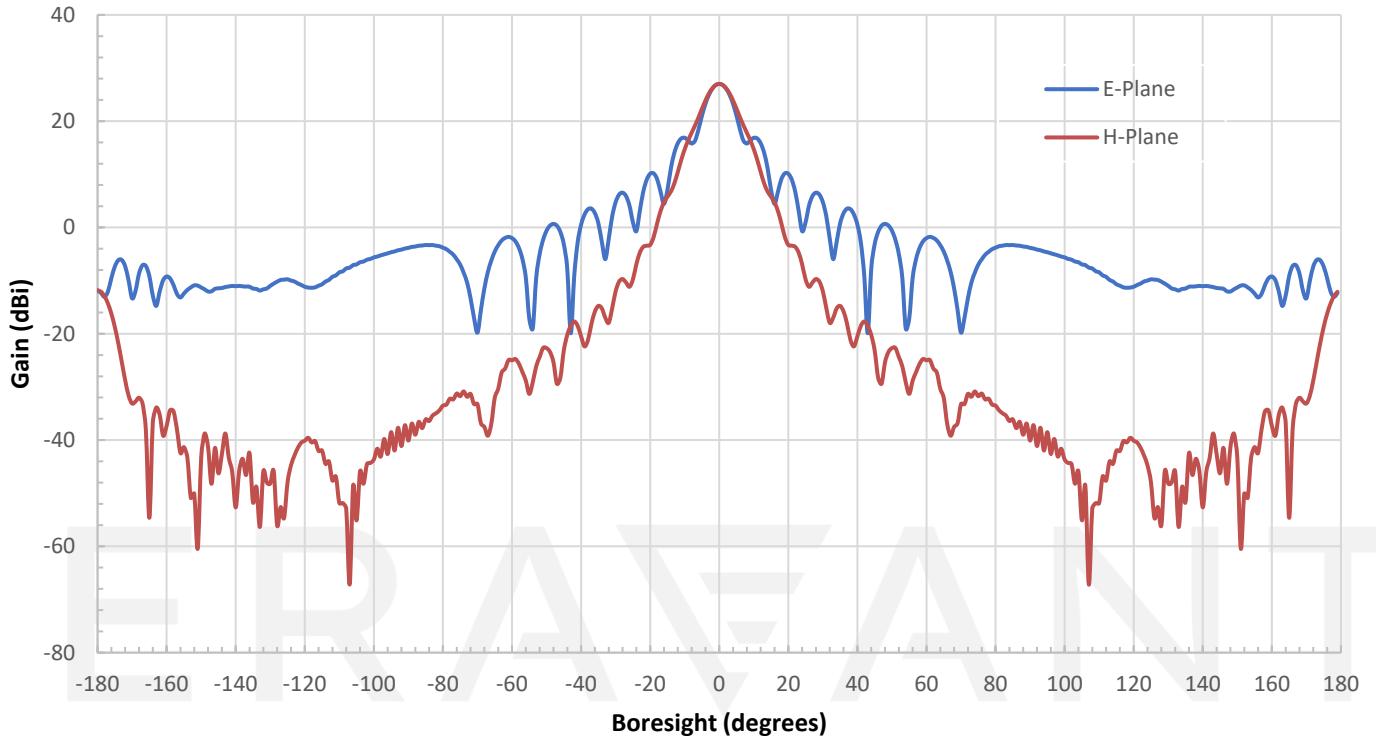


Simulated Return Loss vs. Frequency

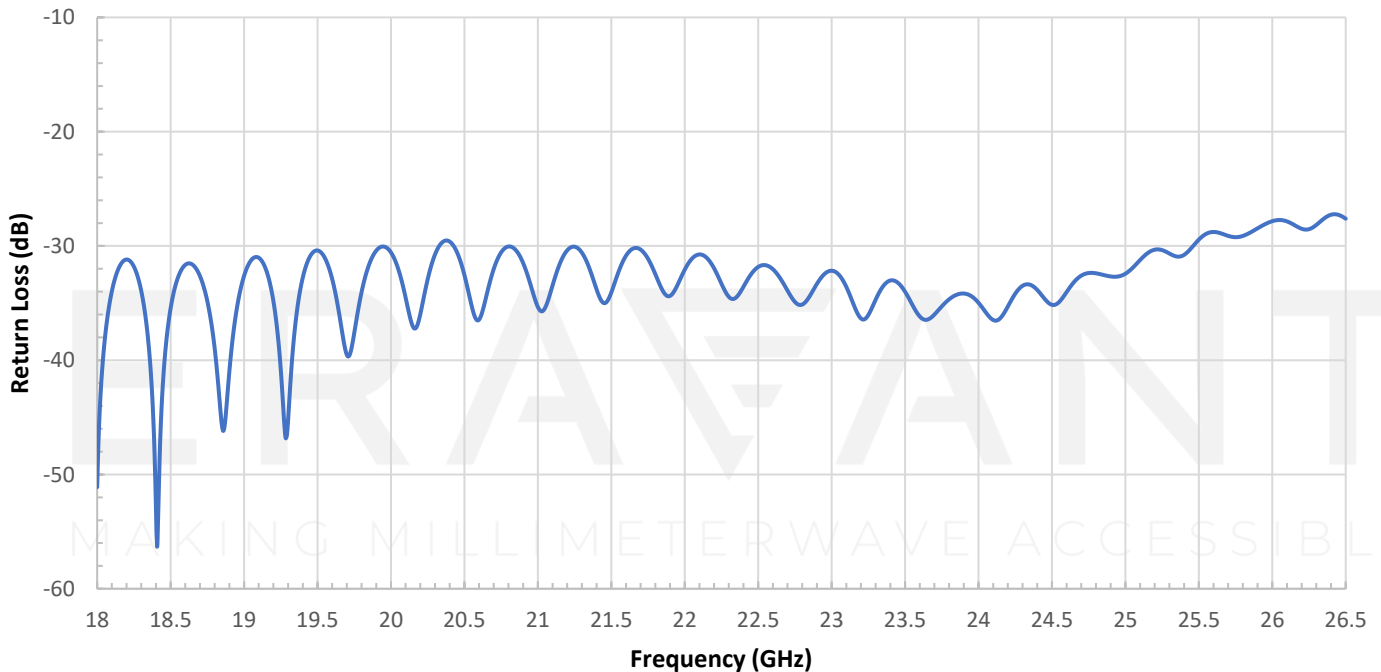


SAR-2507-42-S3

Simulated Gain vs. Frequency

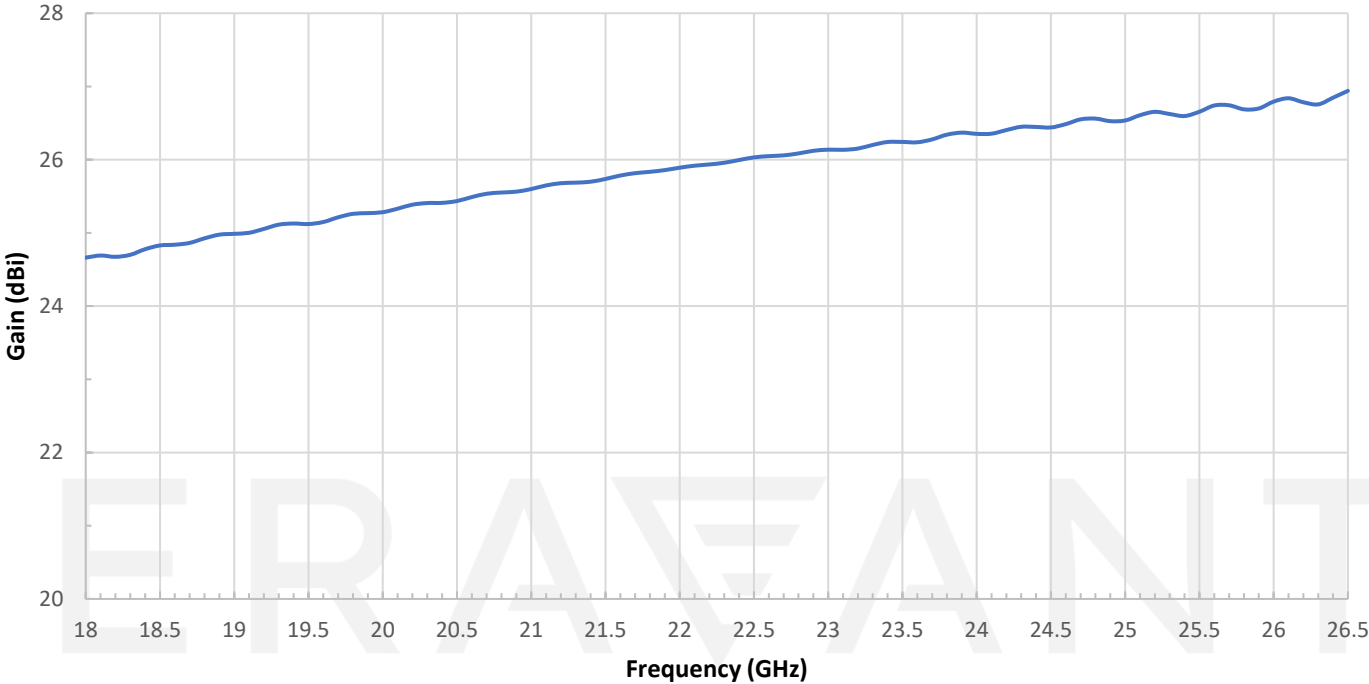

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

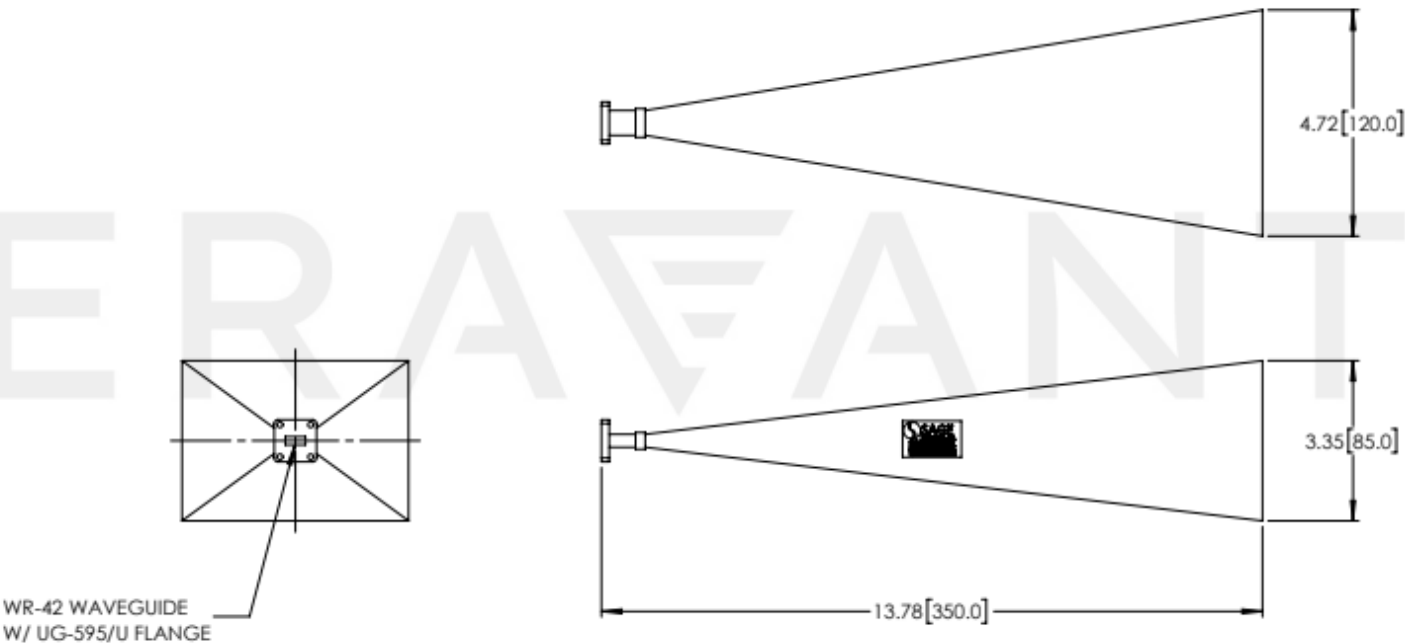

NOTE:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE