


## SMA (M) to SMA (M) Coaxial Cable, Semi-Rigid, 24", Phase Matched

### Description:

**Model SCW-SMSM024-S1-PM** is a 24" long, semi-rigid, phase matched coaxial cable with SMA male connectors that cover the frequency range of DC to 26.5 GHz. The coaxial cable utilizes high performance material and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.

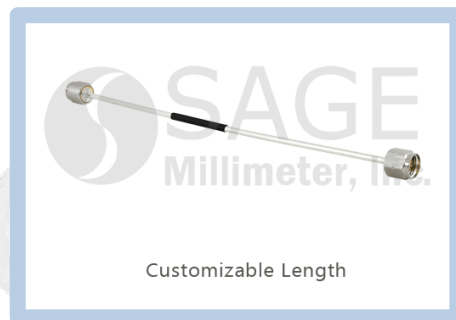

### Features:

- High Return Loss
- Low Insertion Loss
- Semi-Rigid

### Applications:

- Test Lab
- Sub-assemblies
- System Integration

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		26.5 GHz
Insertion Loss @ 3 GHz		0.8 dB	
Insertion Loss @ 6 GHz		1.2 dB	
Insertion Loss @ 12 GHz		1.8 dB	
Insertion Loss @ 18 GHz		2.2 dB	
Insertion Loss @ 26.5 GHz		2.9 dB	
Return Loss @ 26.5 GHz		17 dB	
Impedance		50 $\Omega$	
Phase Match (Unit to Unit)		$\pm 10^\circ$	
Breakdown Voltage			500 V
Radiation Shielding		120 dB	
Velocity Factor		70%	
Power Handling @ 26.5 GHz			30 W (CW)
Specification Temperature		+25 $^\circ\text{C}$	
Operating Temperature	-40 $^\circ\text{C}$		+85 $^\circ\text{C}$

### Mechanical Specifications:


Item	Specification
Minimum Bending Radius	0.126"
Connectors	SMA Male
Connector Material	Passivated Stainless Steel
Cable Conductor	Brass, Gold Plated
Cable Insulators	PTFE
Cable Outer Diameter	0.087"
Length	24"
Outline	CW-SS-S8



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

## SMA (M) to SMA (M) Coaxial Cable, Semi-Rigid, 24", Phase Matched

### Typical Insertion Loss & Return Loss vs. Frequency

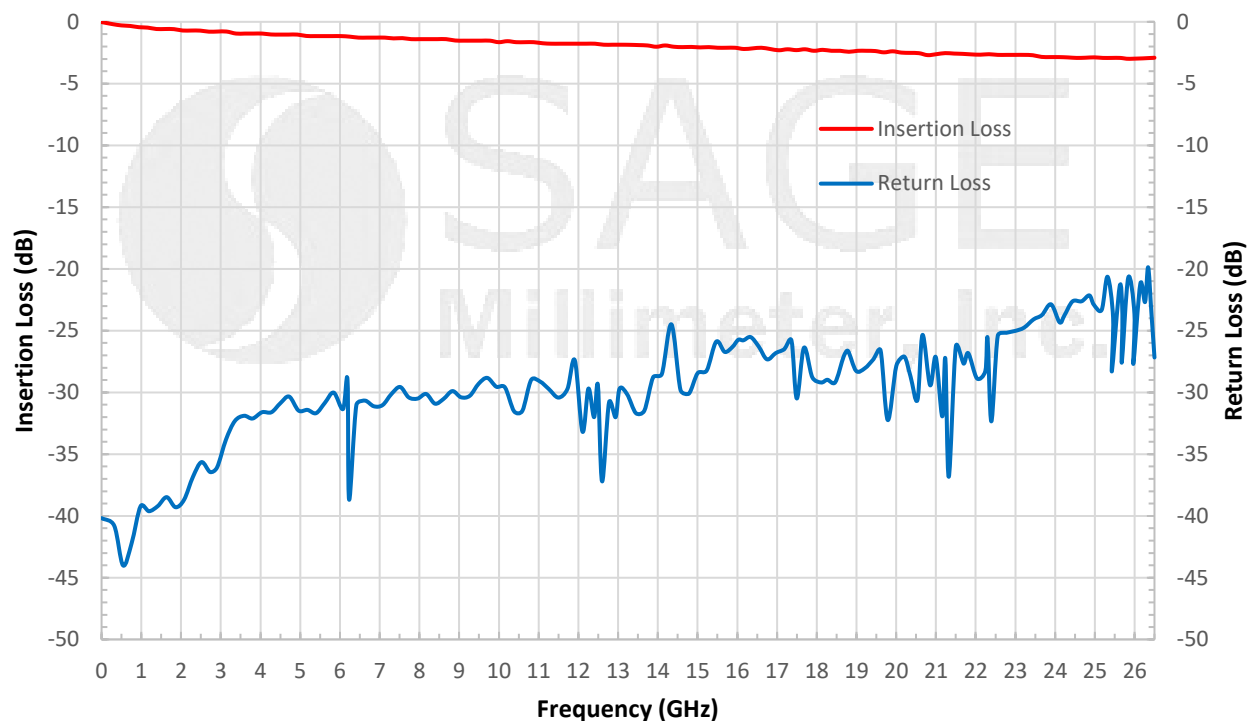

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)



#### Note:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

#### Caution:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**

