SAY-9239634507-094-S1

1/2

Final Rev 1.3

W-Band Cassegrain Antenna, 92 to 96 GHz, 12" Dish, 45 dBi Gain

SAY-9239634507-094-S1 is a W-band Cassegrain antenna that offers a nominal gain of 45 dBi and a typical half power beamwidth of 0.7 degrees from 92 to 96 GHz. The aluminum reflector offers a light-weight and rugged mechanical structure and is treated with a chem film conversion coating for corrosion resistance. A corrugated scalar feed horn is used to provide optimal feed efficiency, low side lobes, high cross-pol rejection, and uniform illumination. The antenna port is a Ø0.094" circular waveguide with UG-387/U-M anti-cocking flange and can support both linear and circular polarized waveforms. Other port configurations, such as a WR-10 waveguide port, are available under different model numbers.

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|---------|---------|---------|
| Frequency Range | 92 GHz | | 96 GHz |
| Gain | | 45 dBi | |
| 3 dB Beamwidth | | 0.7° | |
| Sidelobes A C | | -15 dB | |
| Return Loss | | 15 dB | |
| Specification Temperature | | +25°C | |
| Operating Temperature | -40°C | | +85°C |

Mechanical Specifications:

| Item | Specification | EW Systems |
|--------------------|---|----------------------|
| Antenna Port | Ø0.094" Circular Waveguide with UG-387/U-M Anti-Cocking Flange | SUPPLEMENTAL DETAILS |
| Reflector Diameter | 12" | |
| Reflector Material | Aluminum | |
| Finish | Chem Film | |
| Weight | 2.8 lbs | |
| Outline | AY-CW45-12-A | |
| | | |

| ER Next generati | | |
|---------------------|--|--|
| | | |

ECCN EAR99

•

FEATURES

Rejection

APPLICATIONS

Systems

Linear and Circular Polarization


Low Side Lobe Levels High Cross-polarization

Radar and Communication

ERAVANT

SAY-9239634507-094-S1

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

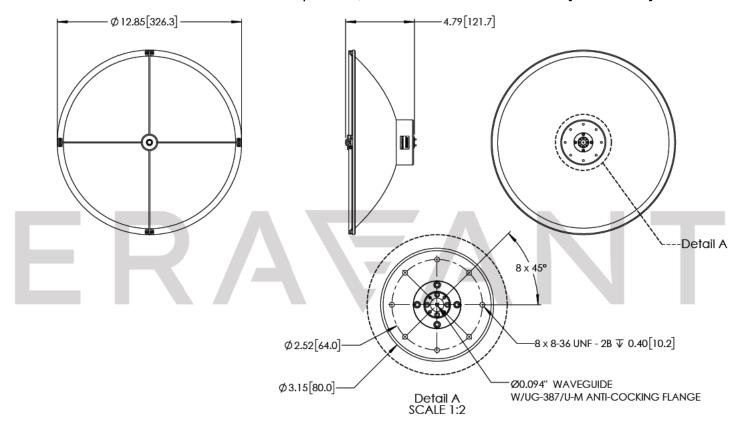

NOTE:

• Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.

MAKING MILLIMETERWAVE ACCESSIBLE