

Broadband Amplifier, 18 to 40 GHz, 40 dB Gain, 10 dBm P_{1dB}, 4.0 dB

Description:

Model SBB-1834034010-KFKF-S1 is a broadband amplifier with a typical small signal gain of 40 dB, a nominal P_{1dB} of +10 dBm, and a typical noise figure of 4.0 dB across the frequency range of 18 to 40 GHz. The DC power requirement for the amplifier is +8 V_{DC}/200 mA. The input and output port configurations are both female k connectors. Other port configurations are available under different model numbers.



Features:

- Broadband Operation
- State-of-the-Art Noise Figure
- High Gain and Good Gain Flatness

Applications:

- 5G Systems
- Radar Systems
- Communication Systems
- Low Noise Receivers



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	18 GHz		40 GHz
Gain		40 dB	
P _{1dB}		+10 dBm	
P _{sat}		+16 dBm	
Noise Figure		4.0 dB	
P _{in}			-20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+16 V _{DC}
DC Supply Current		200 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	K (F)
Output Port	K (F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.3 Oz
Size	1.20" (W) X 1.20" (L) X 0.50" (H)
Outline	BG-SC-1

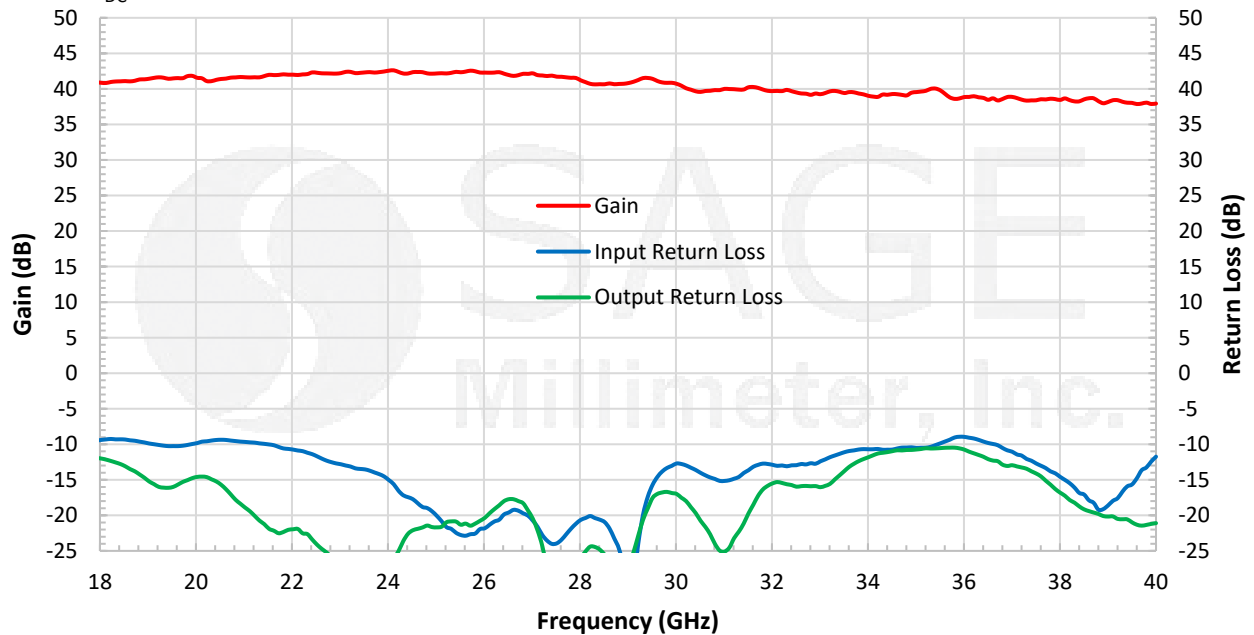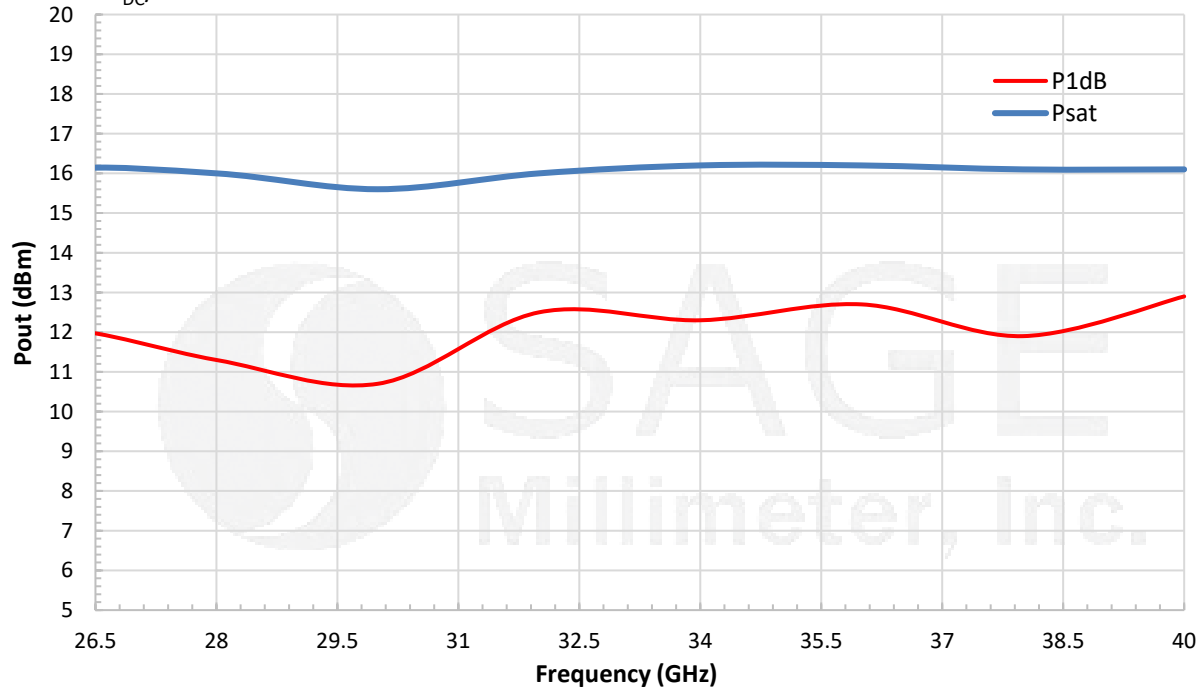


Broadband Amplifier, 18 to 40 GHz, 40 dB Gain, 10 dBm P_{1dB}, 4.0 dB**Typical Gain and Return Loss vs. Frequency**Bias: +8 V_{DC}/200 mA**Typical Output Power vs. Frequency**Bias: +8 V_{DC}/200 mA


Broadband Amplifier, 18 to 40 GHz, 40 dB Gain, 10 dBm P_{1dB}, 4.0 dB

Typical Noise Figure vs. Frequency

Bias: +8V_{DC}/200 mA

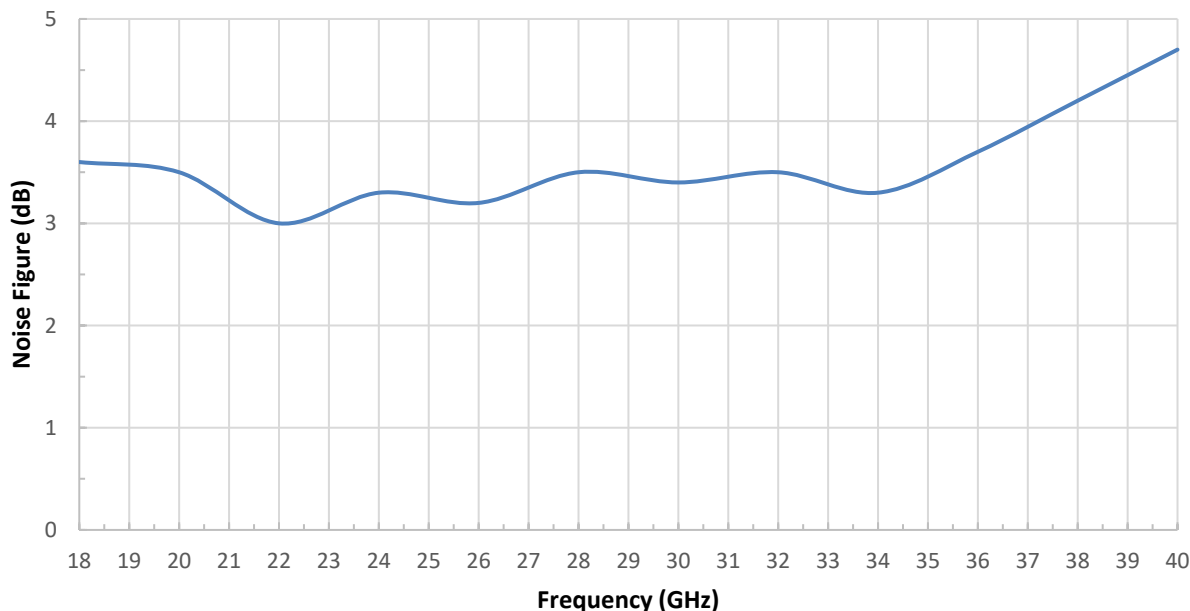

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

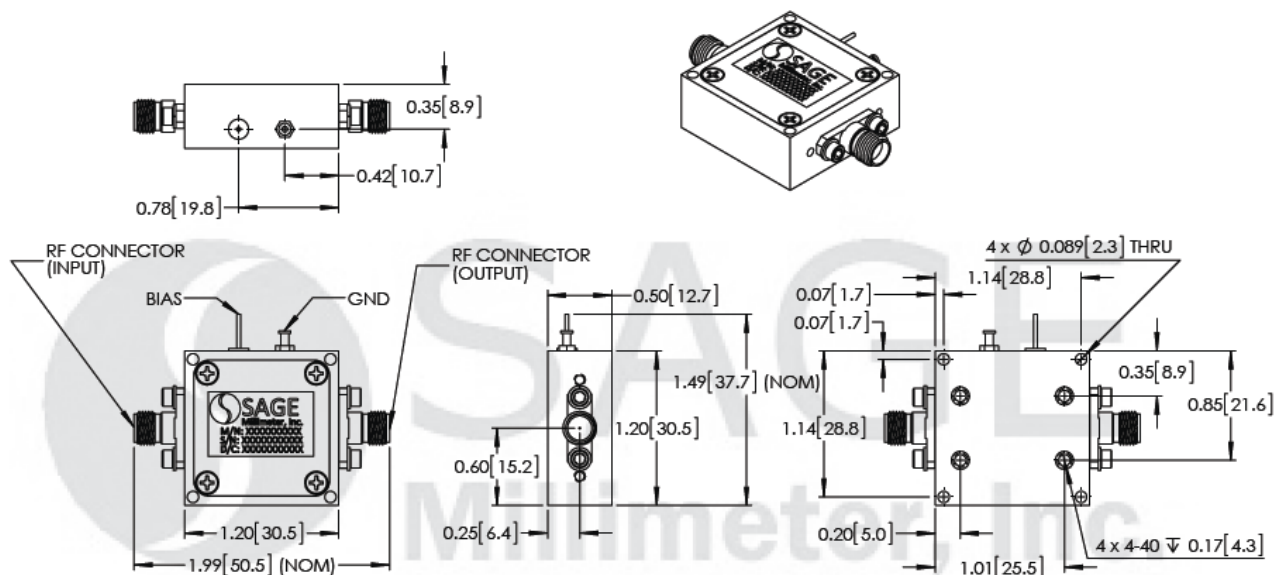



Broadband Amplifier, 18 to 40 GHz, 40 dB Gain, 10 dBm P_{1dB}, 4.0 dB

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

