

SBL-1442041570-0505-E1

WR-05 Low Noise Amplifier, 140 to 200 GHz, 15 dB Gain, 7 dB NF

SBL-1442041570-0505-E1 is a WR-05 low noise amplifier with a typical small signal gain of 15 dB and a nominal noise figure of 7.0 dB across the frequency range of 140 to 200 GHz. The DC power requirement for the amplifier is +8 VDC/40 mA. The input and output port configuration offers an inline structure with WR- 05 waveguides and UG-387/U-M anti-cocking flanges.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	140 GHz		200 GHz
Gain		15 dB	
Noise Figure		7.0 dB	
P <sub>1dB</sub>		-3 dBm	
P <sub>in</sub>			+10 dBm
Input Return Loss		6 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V <sub>DC</sub>	+12 V <sub>DC</sub>
DC Supply Current		40 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Item	Specification
Input	WR-05 Waveguide with UG-387/U-M Anti-Cocking Flange
Output	WR-05 Waveguide with UG-387/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.40" (L) X 1.00" (W) X 0.75" (H)
Outline	BG-SG-2-A

ECCN

3A001.b.4

FEATURES

- State-of-the-Art Noise Figure
- Low Power Consumption

APPLICATIONS

- 6G Systems


SUPPLEMENTAL DETAILS



SBL-1442041570-0505-E1


Typical Gain and Return Loss vs. Frequency

Bias: 8 V<sub>DC</sub>/30mA

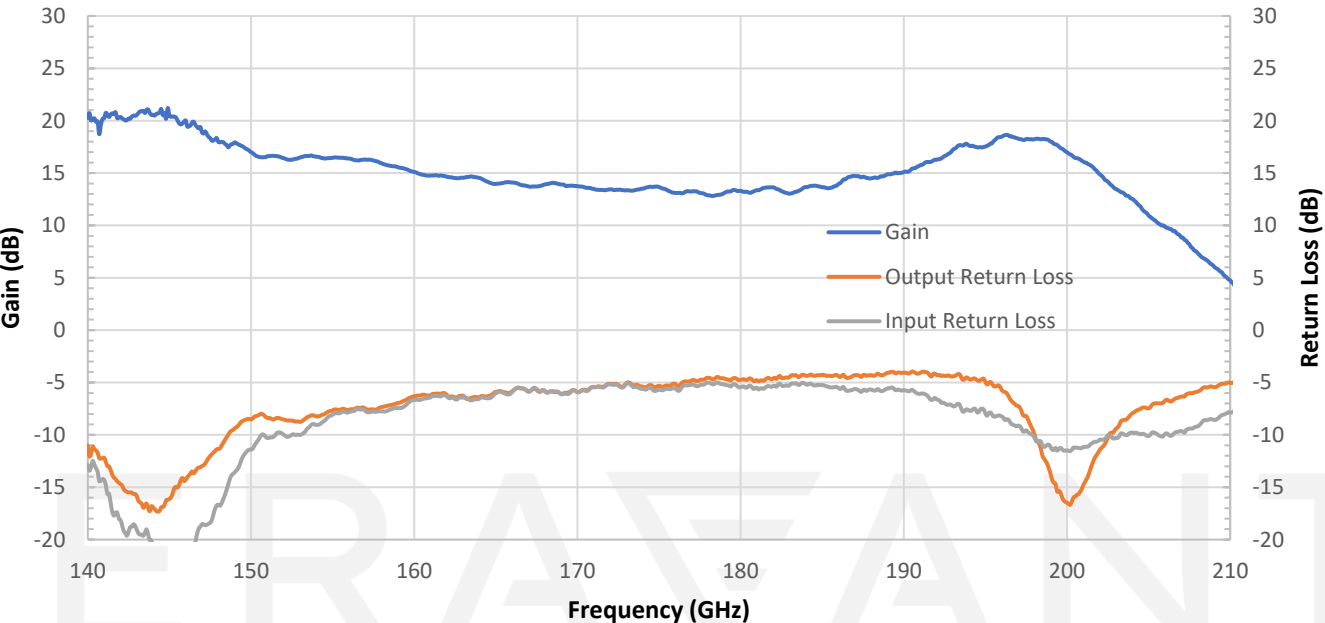

Typical P1dB vs. Frequency


Bias: +8V<sub>DC</sub>/30 mA

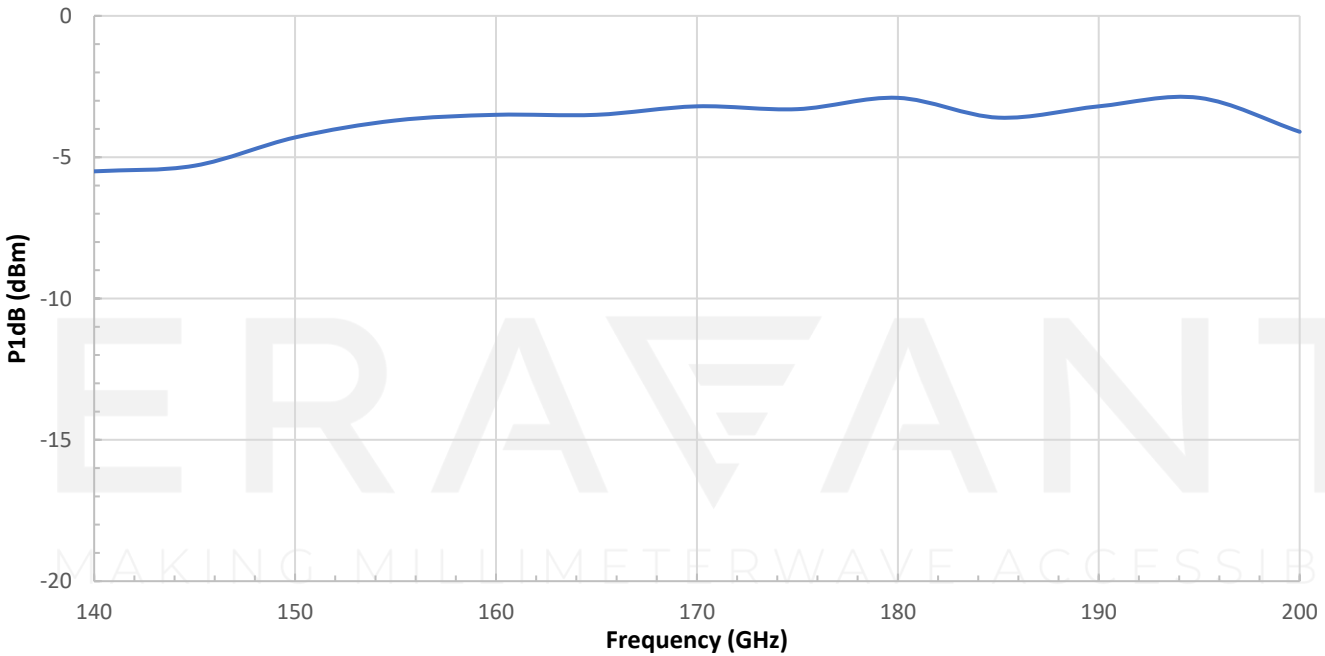

## SBL-1442041570-0505-E1

### Mechanical Outline:

(Unless otherwise specified, all dimensions are in inches [millimeters])

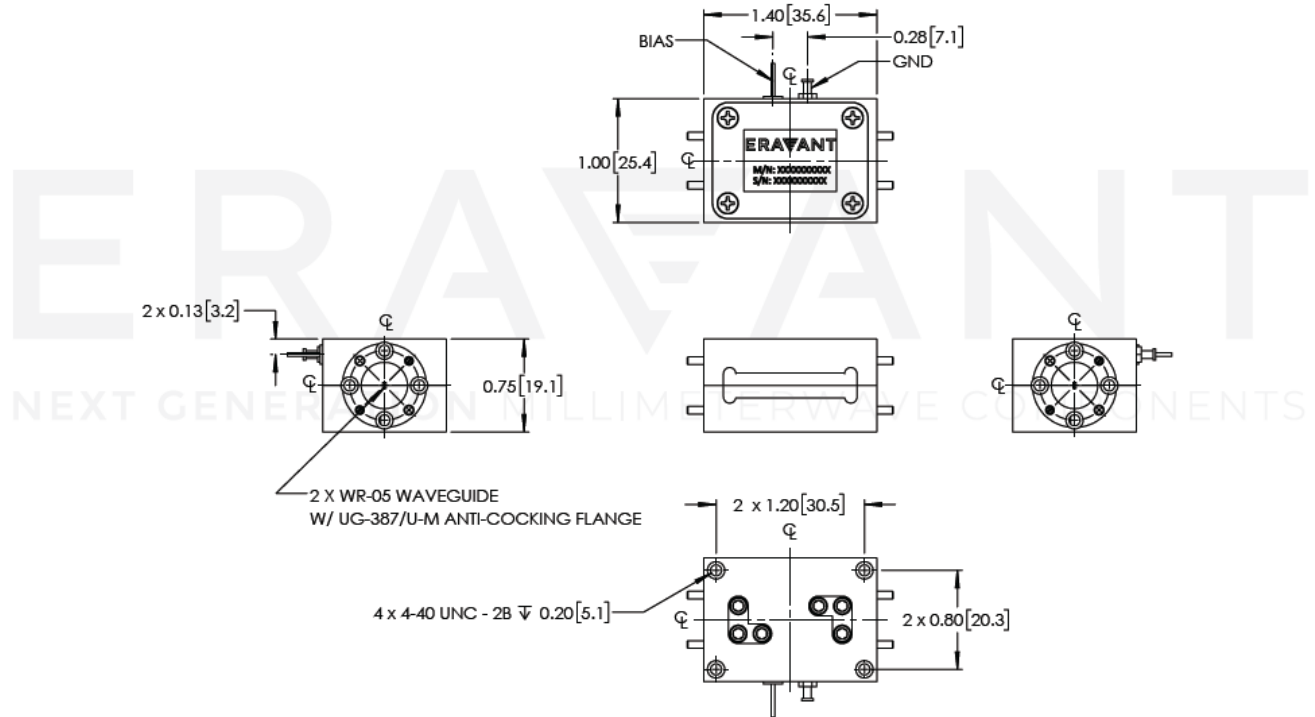

### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the device will cause performance degradation and possible device damage.
- Exceeding absolute maximum ratings shown will damage the device. The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- For 1 mm connectors proper torque should be applied:  $4.0 \pm 0.15$  inch-pounds ( $0.45 \pm 0.02$  Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.