



## Low Noise Amplifier, K Band, 20 dB Gain, 2.5 dB NF

### Description:

Model **SBL-1832732025-KFKF-S1** is a low noise amplifier with a typical small signal gain of 20 dB and a nominal noise figure of 2.5 dB across the frequency range of 18 to 26.5 GHz. The DC power requirement for the amplifier is +8 V<sub>DC</sub>/130 mA. The RF connectors are female K connectors. Other port configurations are available under different model numbers.



### Features:

- Full Waveguide Band Operation
- State-of-the-Art Noise Figure
- Low Power Consumption

### Applications:

- Radar Systems
- Communication Systems
- Low Noise Receivers

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	18 GHz		26.5 GHz
Gain		20 dB	
Noise Figure		2.5 dB	
P <sub>1dB</sub>		+18 dBm	
P <sub>in</sub>			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+12 V <sub>DC</sub>
DC Supply Current		130 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

### Mechanical Specifications:

Item	Specification
Input Port	K(F)
Output Port	K(F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.3 Oz
Size	1.20" (W) X 1.20" (L) X 0.50" (H)
Outline	BG-SC-1






## Low Noise Amplifier, K Band, 20 dB Gain, 2.5 dB NF


### Typical Gain and Return Loss vs. Frequency

Bias: +8 V<sub>DC</sub>/130 mA

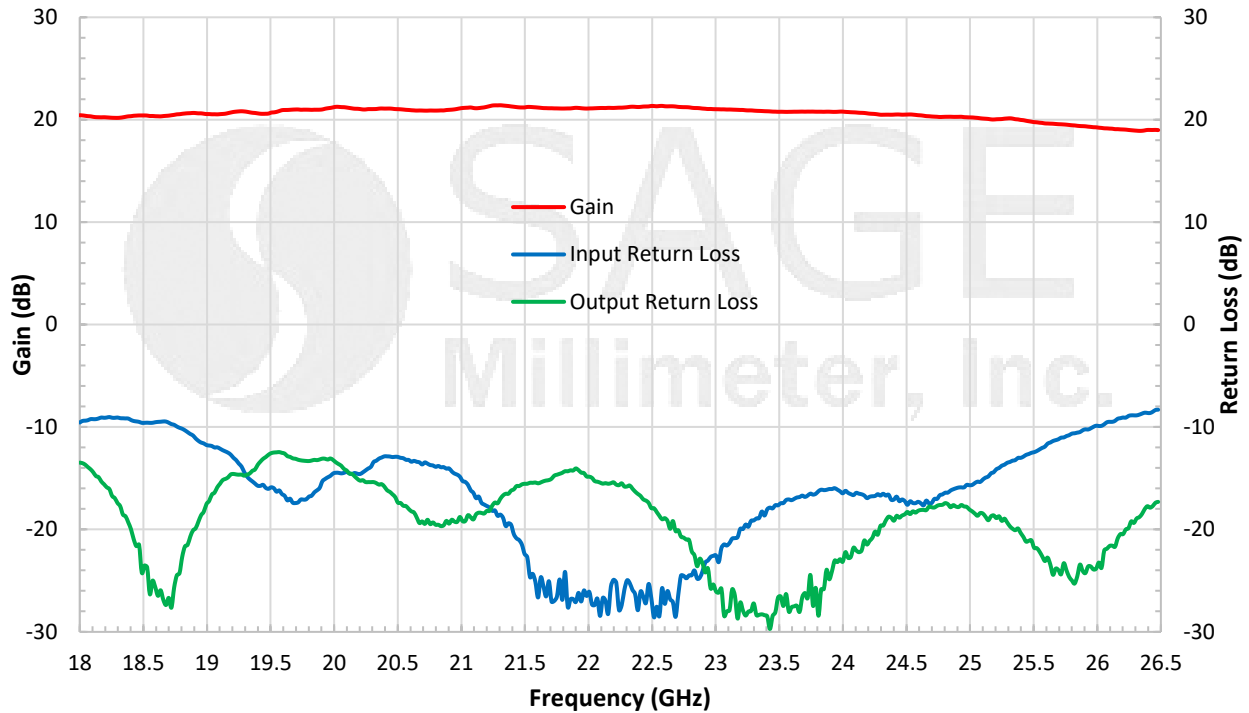

### Typical Noise Figure vs. Frequency


Bias: +8 V<sub>DC</sub>/130 mA

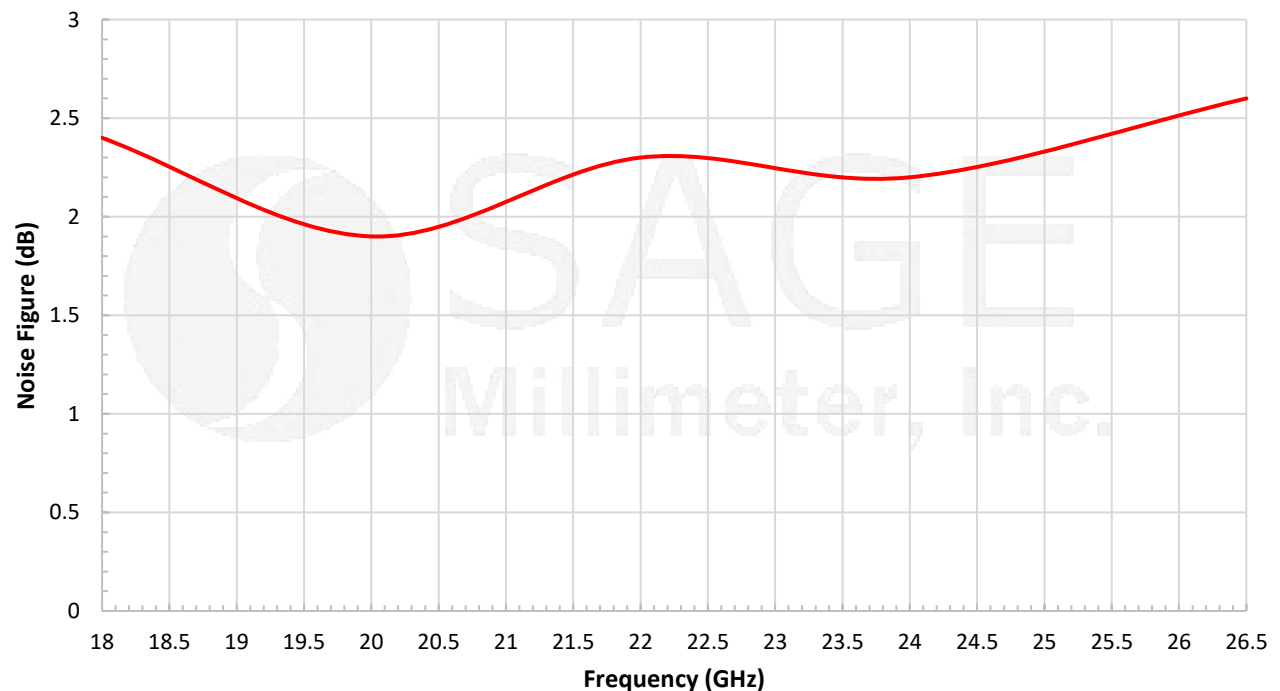



## Low Noise Amplifier, K Band, 20 dB Gain, 2.5 dB NF

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

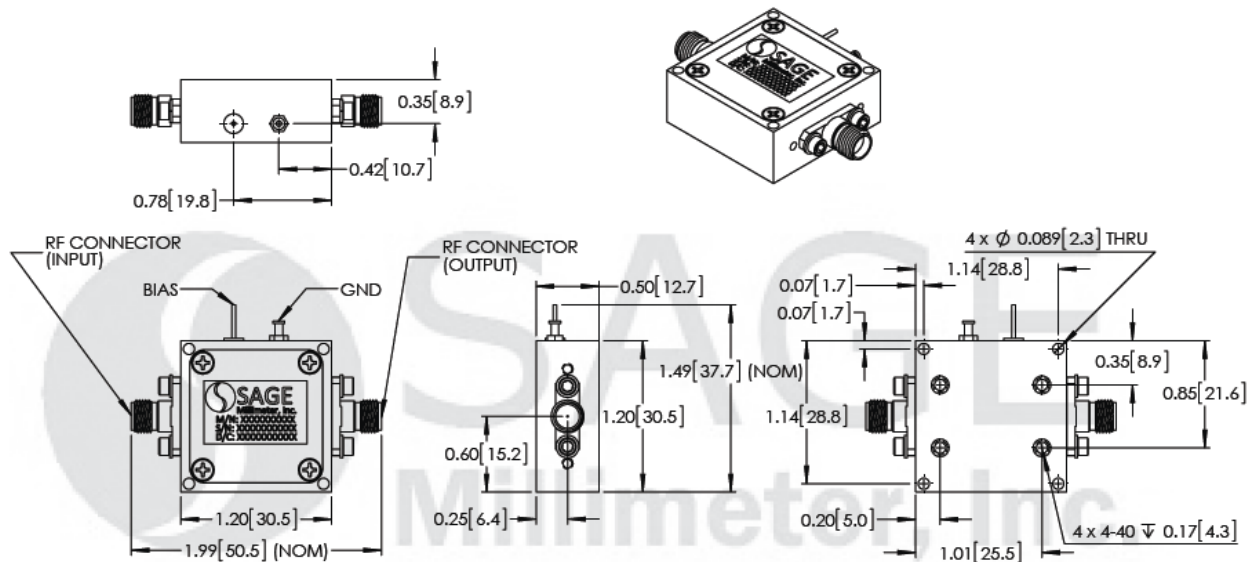

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

