



## Ka-Band Low Noise Amplifier, 26.5 to 40 GHz, 20 dB Gain, 3 dB NF

### Description:

Model **SBL-2634032030-KF28-S1** is a low noise amplifier with a typical small signal gain of 20 dB and a nominal noise figure of 3 dB across the frequency range of 26.5 to 40 GHz. The DC power requirement for the amplifier is +8 V<sub>DC</sub>/66 mA. The input port configuration is female K connector and the output port is a WR-28 waveguide with UG-599/U flange. Other port configurations are available under different model numbers.



### Features:

- Full Waveguide Band Operation
- State-of-the-Art Noise Figure
- Good Gain Flatness

### Applications:

- Radar Systems
- Communication Systems
- Low Noise Receivers

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		40.0 GHz
Gain		20 dB	
Noise Figure		3 dB	
P <sub>1dB</sub>		+8 dBm	
P <sub>in</sub>			-1 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+15 V <sub>DC</sub>
DC Supply Current		66 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

### Mechanical Specifications:

Item	Specification
Input Port	K (F) Connector
Output Port	WR-28 Waveguide with UG-599/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.5 Oz
Size	1.70" (L) X 1.20" (W) X 0.50" (H)
Outline	BG-SA-1CW






## Ka-Band Low Noise Amplifier, 26.5 to 40 GHz, 20 dB Gain, 3 dB NF


### Typical Gain and Return Loss vs. Frequency

Bias: +8 V<sub>DC</sub>/66 mA

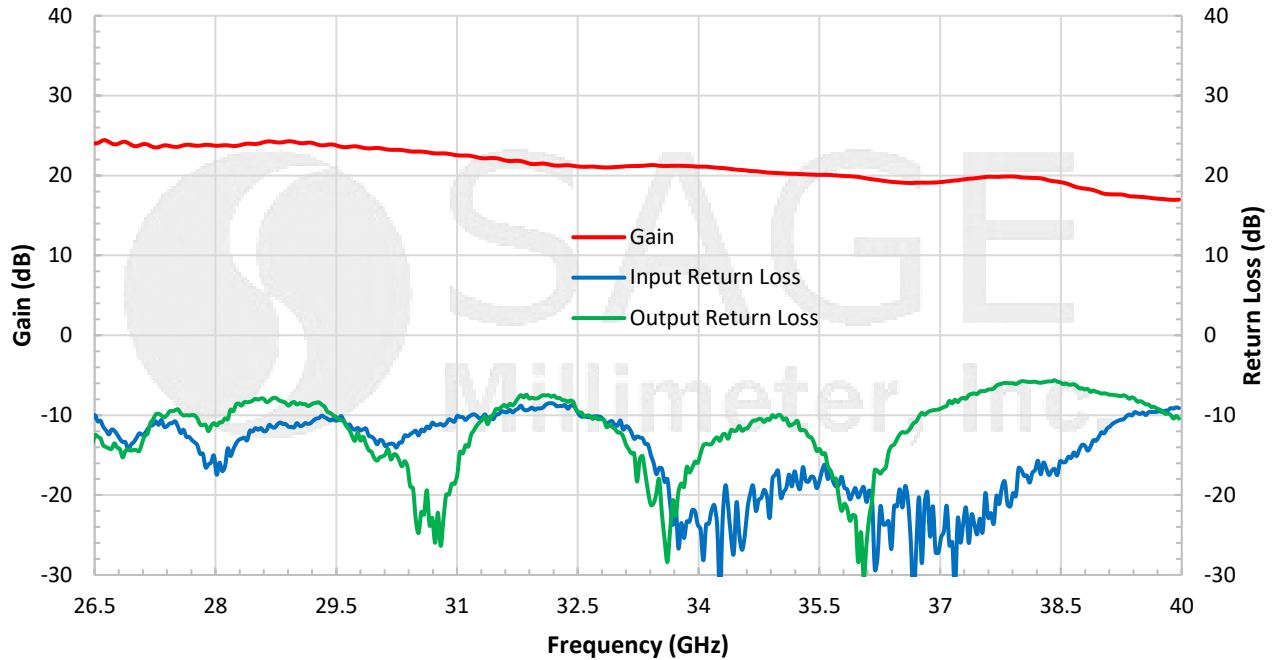

### Typical Noise Figure vs. Frequency


Bias: +8 V<sub>DC</sub>/66 mA

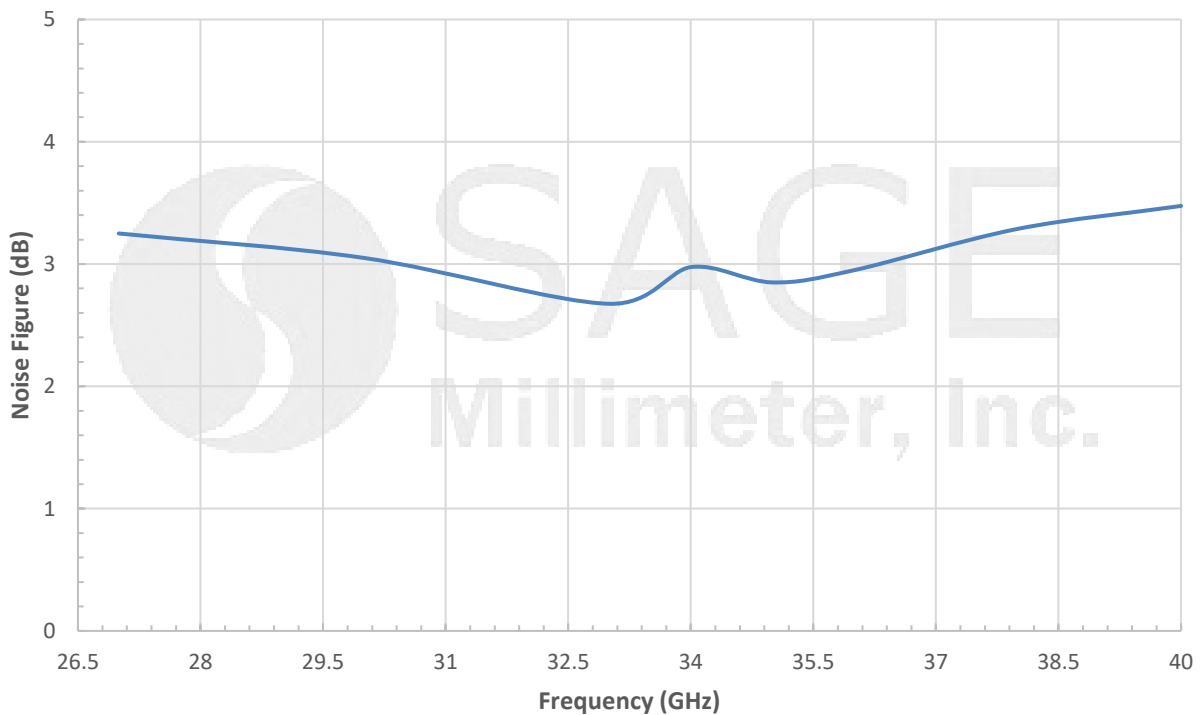



## Ka-Band Low Noise Amplifier, 26.5 to 40 GHz, 20 dB Gain, 3 dB NF

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

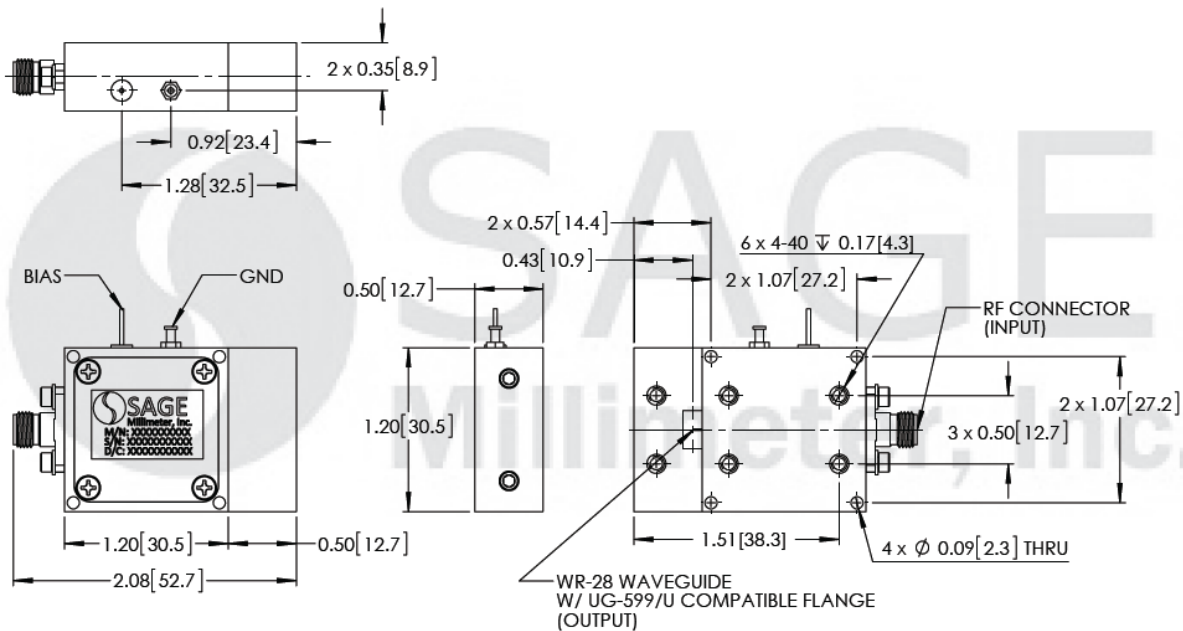

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

