

E-Band Low Noise Amplifier, 20 dB Gain, 3.0 dB NF

SBL-6038132030-1212-E1 is a low noise amplifier with a typical small signal gain of 20 dB and a nominal noise figure of 3.0 dB across the frequency range of 60 to 81 GHz. The DC power requirement for the amplifier is +8 VDC/65 mA. The mechanical configuration offers an in line structure with WR-12 waveguides and UG-387/U anti-cocking flanges. Other port configurations, such as with 1 mm connectors or a right angle structure with WR-12 waveguides, are also available under different model numbers.

**Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Frequency	60 GHz		81 GHz
Gain		20 dB	
Noise Figure		3 dB	
P _{1dB}		-3 dBm	
P _{in}			+5 dBm
Input Return Loss		8 dB	
Output Return Loss		8 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+15 V _{DC}
DC Supply Current		65 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Item	Specification
Input Port	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
Output Port	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) x 1.50" (L) x 0.75" (H)
Outline	BG-SE-2-A

ECCN

EAR99

FEATURES

- State-of-the-Art Noise Figure
- High Gain


APPLICATIONS

- Radar Systems
- Communication Systems
- Low Noise Receivers

SUPPLEMENTAL DETAILS


Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/66 mA

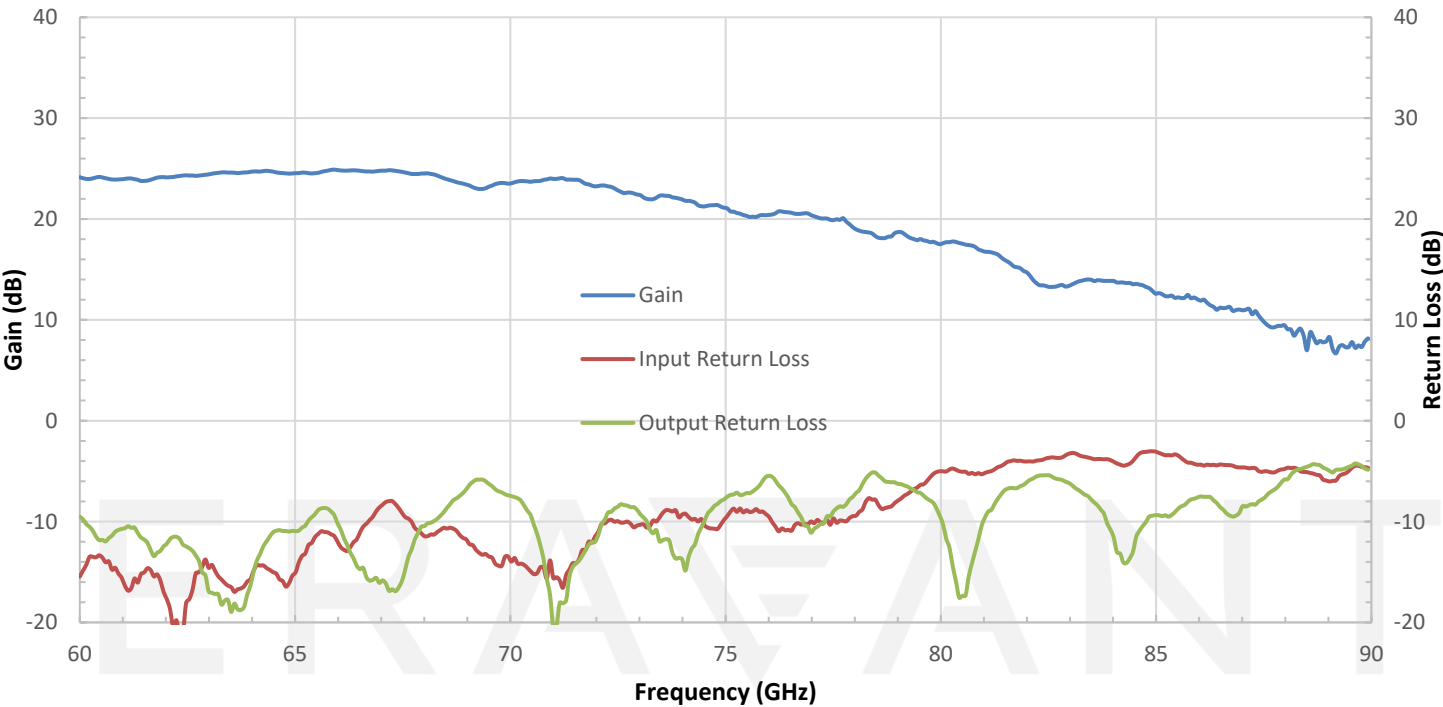

Noise Figure vs. Frequency


Bias: +8V_{DC}/66 mA

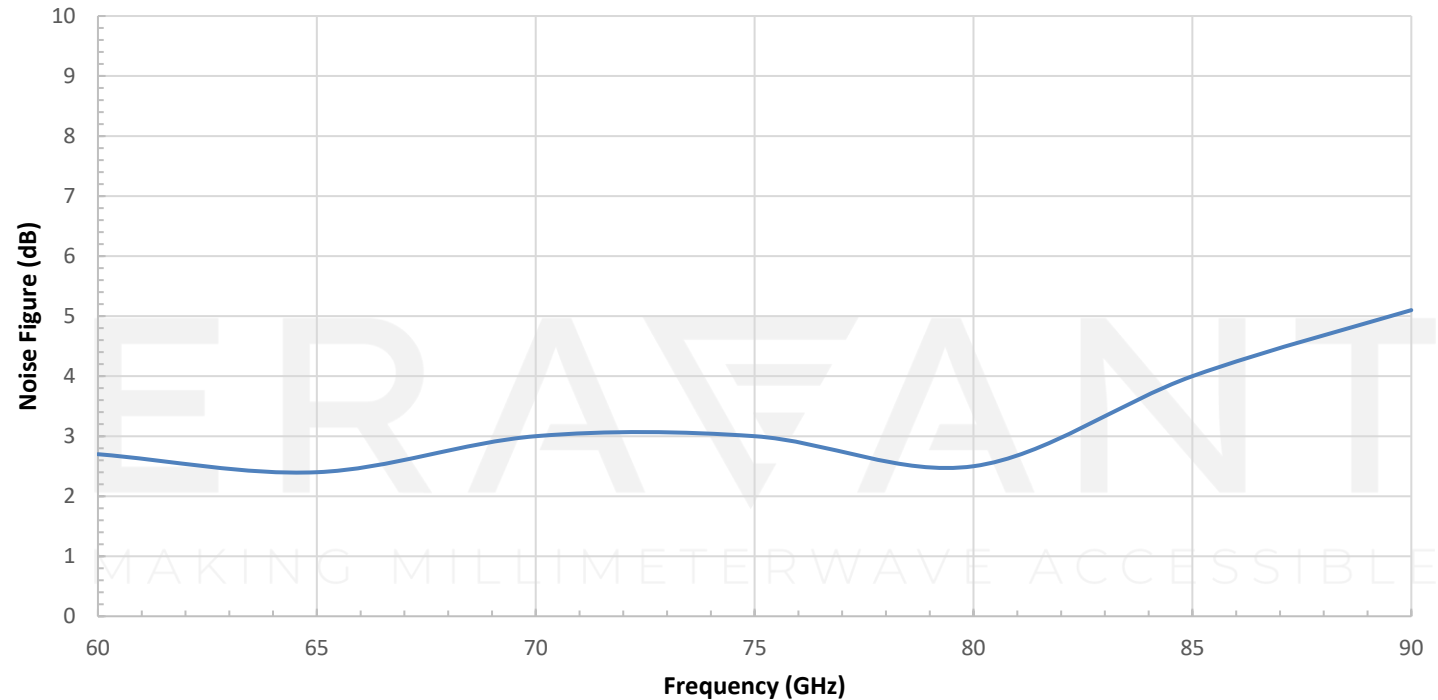


SBL-6038132030-1212-E1

P1dB vs. Frequency

Bias: +8 V_{DC}/66 mA

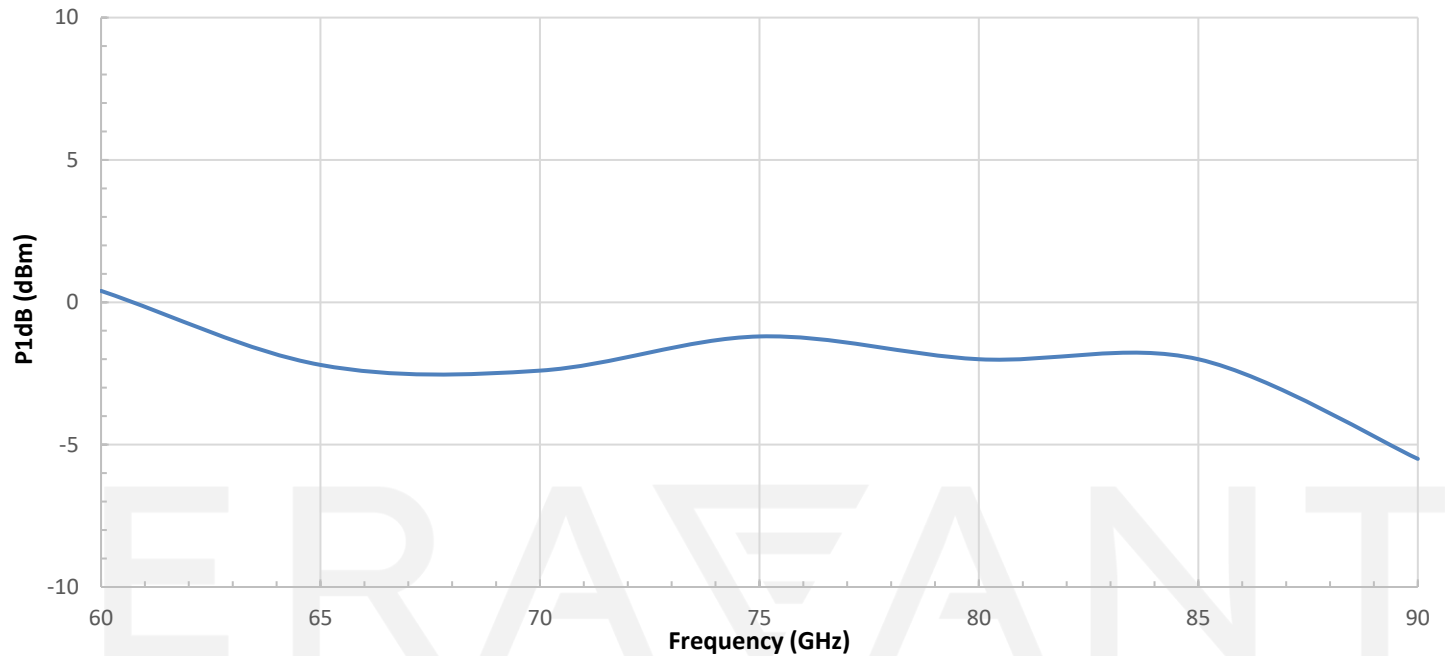

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

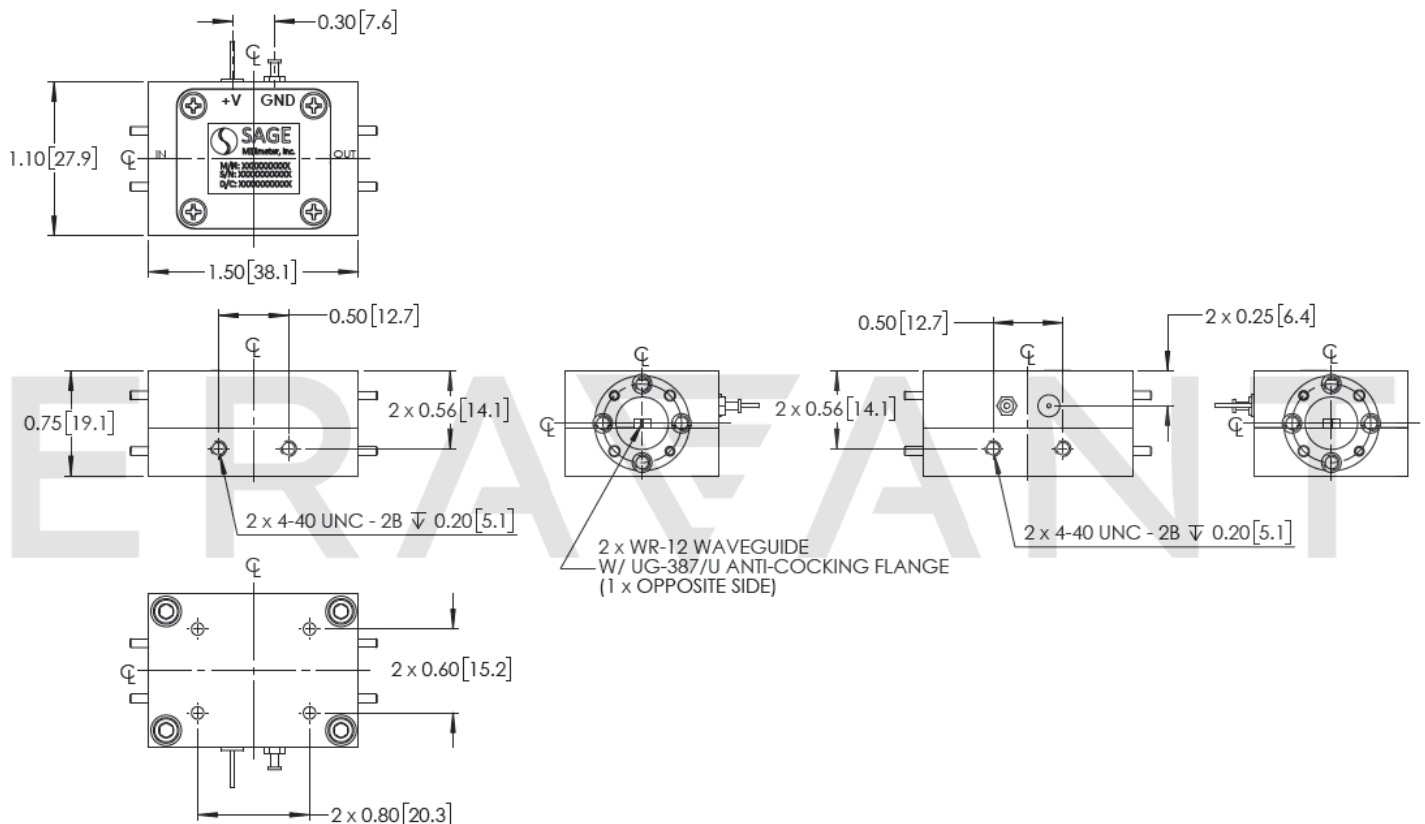

NOTE:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50°C. Use proper heatsink or fan if necessary.
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE