

F-Band Low Noise Amplifier, 95 to 140 GHz, 35 dB Gain, 6.5 dB NF

Description:

Model SBL-9531443565-0808-E1 is a F-band low noise amplifier with a typical small signal gain of 35 dB and a nominal noise figure of 6.5 dB across the frequency range of 95 to 140 GHz. The DC power requirement for the amplifier is +8 V_{DC}/80 mA. The input and output port configuration offers an inline structure with WR-08 waveguides and UG-387/U-M anti-cocking flanges. Other port configurations are available under different model numbers.



Features:

- State-of-the-Art Noise Figure
- Low Power Consumption

Applications:

- Communication Systems
- Radar Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	95 GHz		140 GHz
Gain		35 dB	
Noise Figure		6.5 dB	
P _{1dB}		-5 dBm	
P _{in}			10 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V _{DC}	+12 V _{DC}
DC Supply Current		80 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
Input	WR-08 Waveguide with UG-387/U-M Anti-Cocking Flange
Output	WR-08 Waveguide with UG-387/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Outline	BG-SF-2-A



F-Band Low Noise Amplifier, 95 to 140 GHz, 35 dB Gain, 6.5 dB NF


Typical Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/84 mA

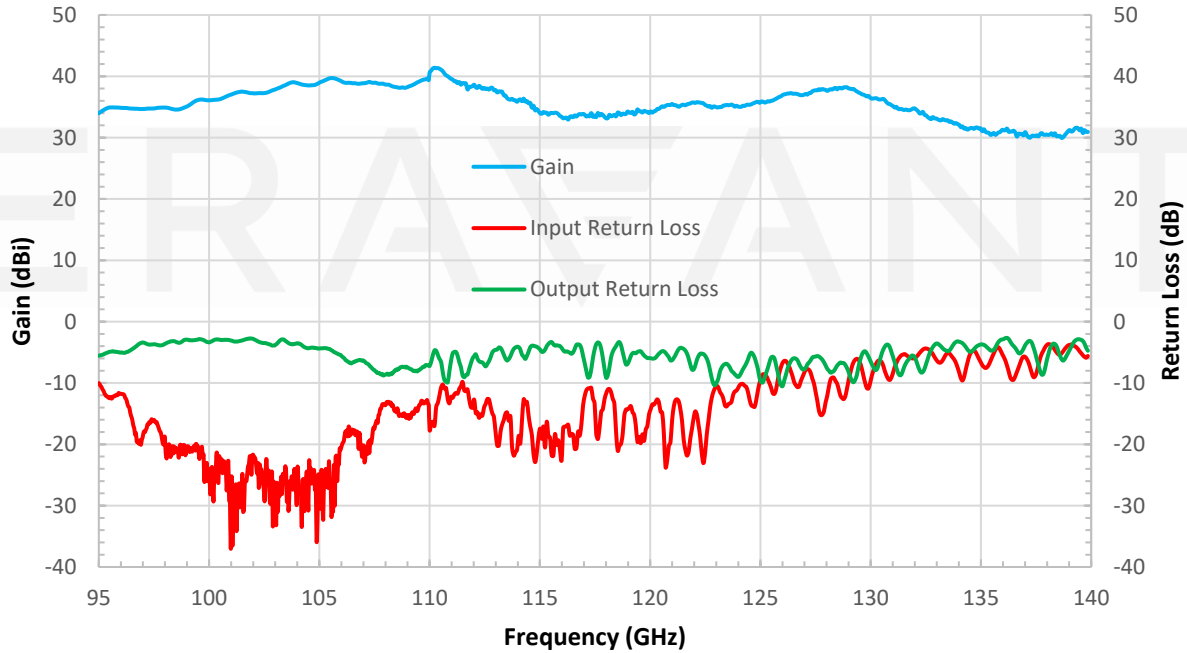

Noise Figure vs. Frequency


Bias: +8V_{DC}/84 mA

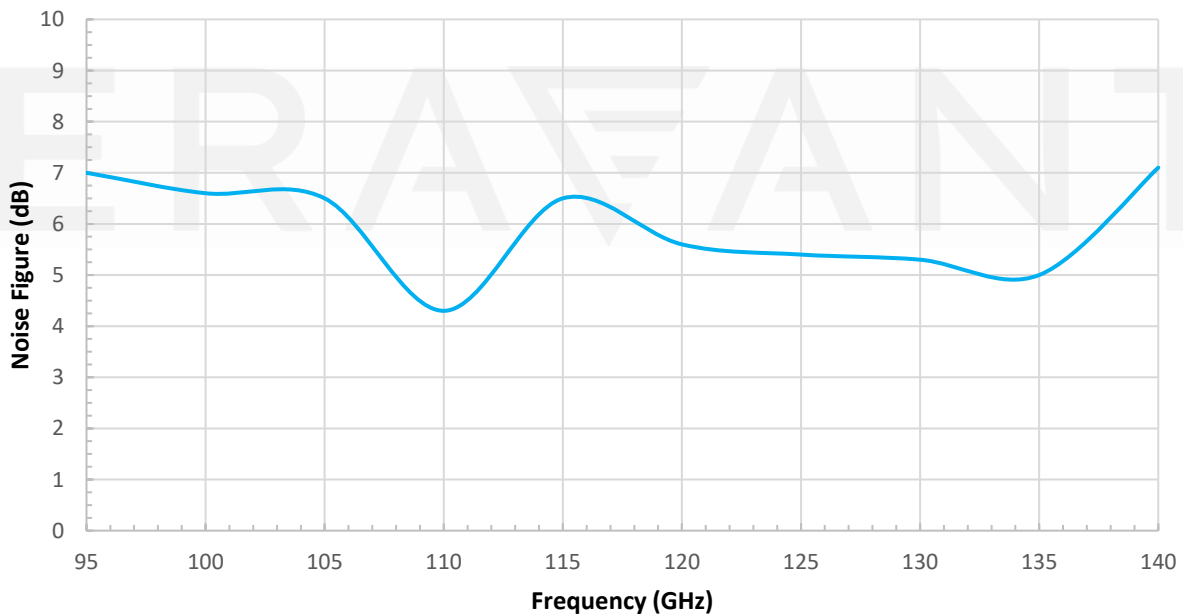


F-Band Low Noise Amplifier, 95 to 140 GHz, 35 dB Gain, 6.5 dB NF

Output Power vs. Frequency

Bias: +8V_{DC}/84 mA

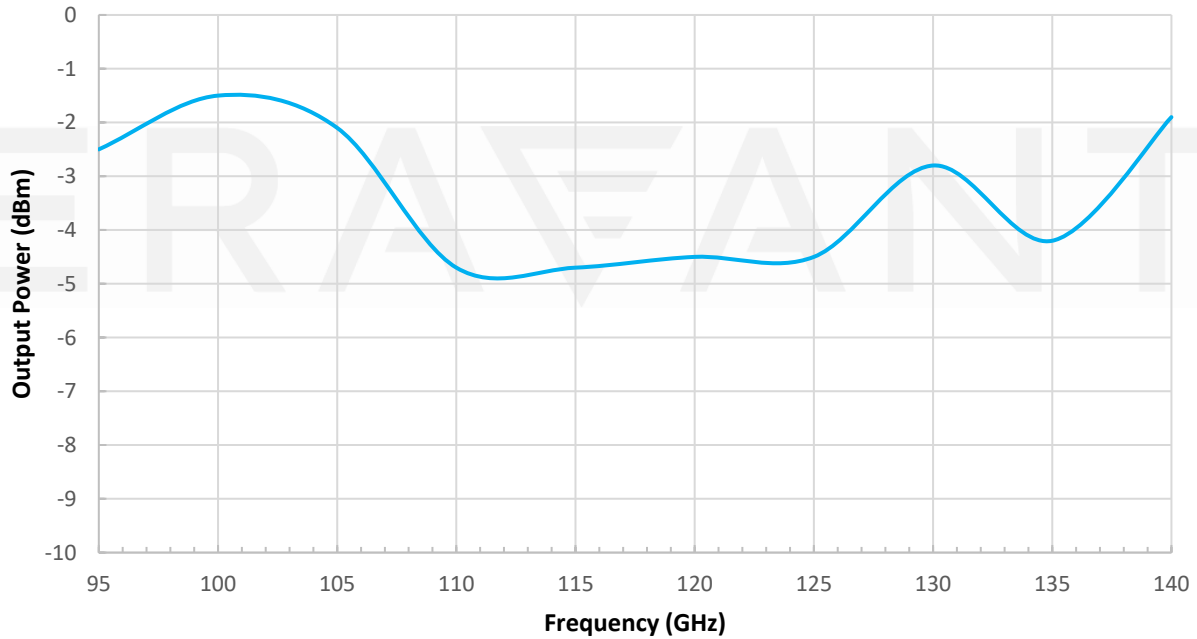

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

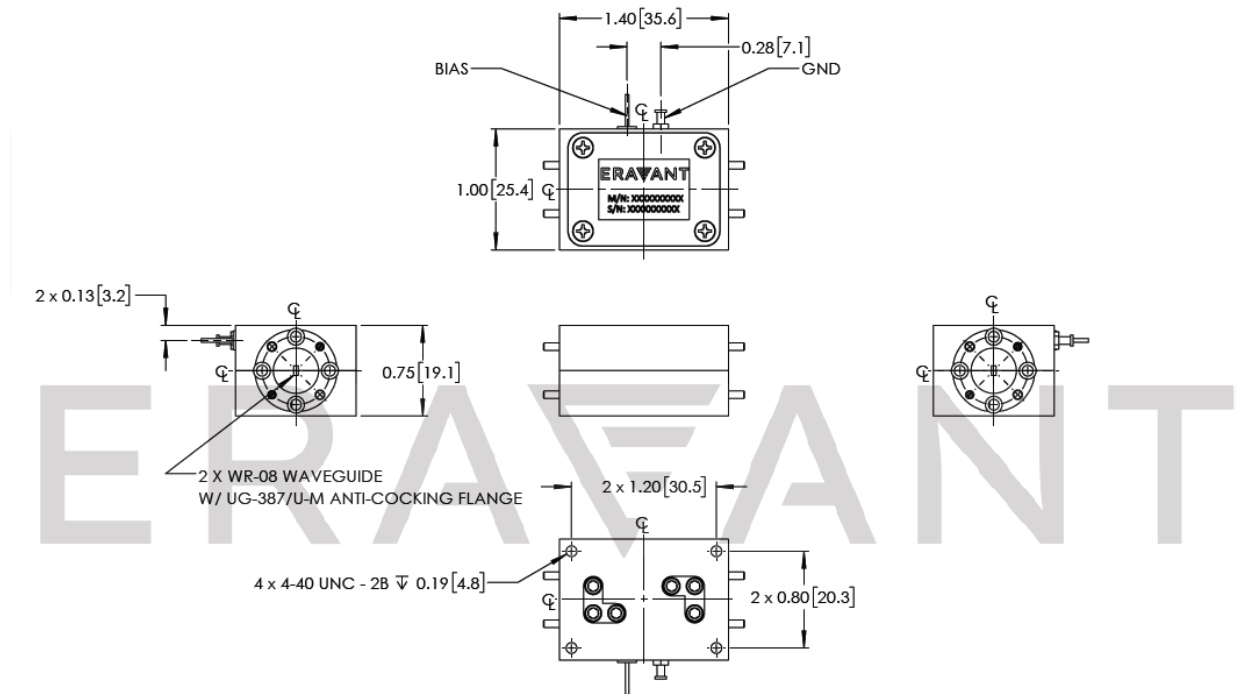

F-Band Low Noise Amplifier, 95 to 140 GHz, 35 dB Gain, 6.5 dB NF

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.

ERAVANT

