

## 17 to 27 GHz Power Amplifier, 53 dB Gain, +43 dBm P<sub>sat</sub>

**SBP-1732735343-KFKF-EP** is a power amplifier with a typical small gain of 53 dB and a nominal P<sub>sat</sub> of +43 dBm across the frequency range of 17 to 27 GHz. The DC power requirement for the amplifier is +22 V<sub>DC</sub>/5.5 A. The mechanical configurations is an inline structure with K (F) connector as its input port and output port. Other port configurations, such as K (M) connectors and WR-42 waveguides for either the input or output port, are also available under different model numbers.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	17 GHz		27 GHz
Small Signal Gain		53 dB	
Power Gain		43 dB	
P <sub>sat</sub>		+43 dBm	
P <sub>in</sub>			+8 dBm
Input Return Loss		10 dB	
Output Return Loss		5 dB	
DC Supply Voltage (VDD)	+20 V <sub>DC</sub>	+22 V <sub>DC</sub>	+24 V <sub>DC</sub>
DC Supply Current		5.5 A	
Supply Voltage to Fan		+12 V <sub>DC</sub> / 1.8 A	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

### Mechanical Specifications:

Item	Specification
Input	2.92 mm (K) Female
Output	2.92 mm (K) Female
Power Supply	Solder Pin
Case Material	Copper
Finish	Gold Plated
Size	2.99" (L) X 3.15" (W) X 3.30" (H)
Outline	BP-HC-H3

### ECCN

3A001.b.4

### FEATURES

- Class AB GaN Technique
- Broadband Performance
- High Gain
- High Output Power


### APPLICATIONS

- Radar Systems
- Communication Systems
- Test Equipment


### SUPPLEMENTAL DETAILS




Typical Gain vs. Frequency

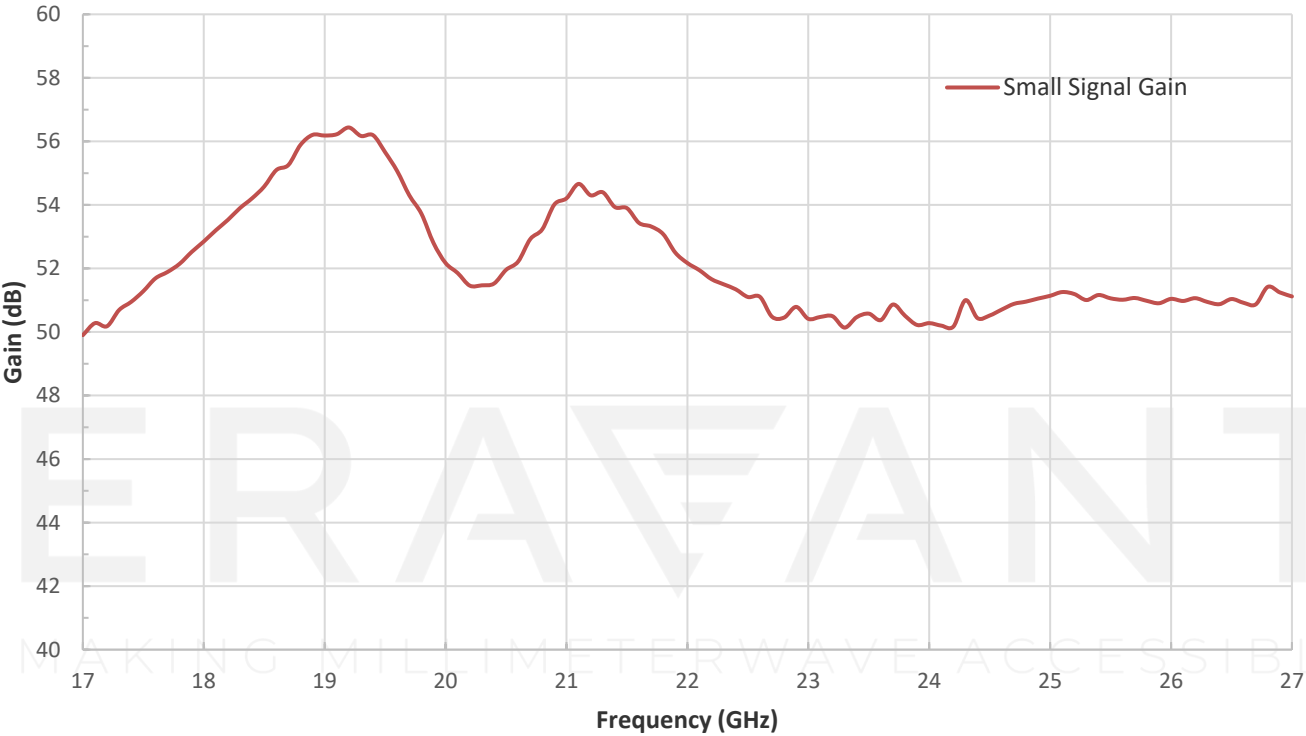


Typical  $P_{SAT}$  vs. Frequency

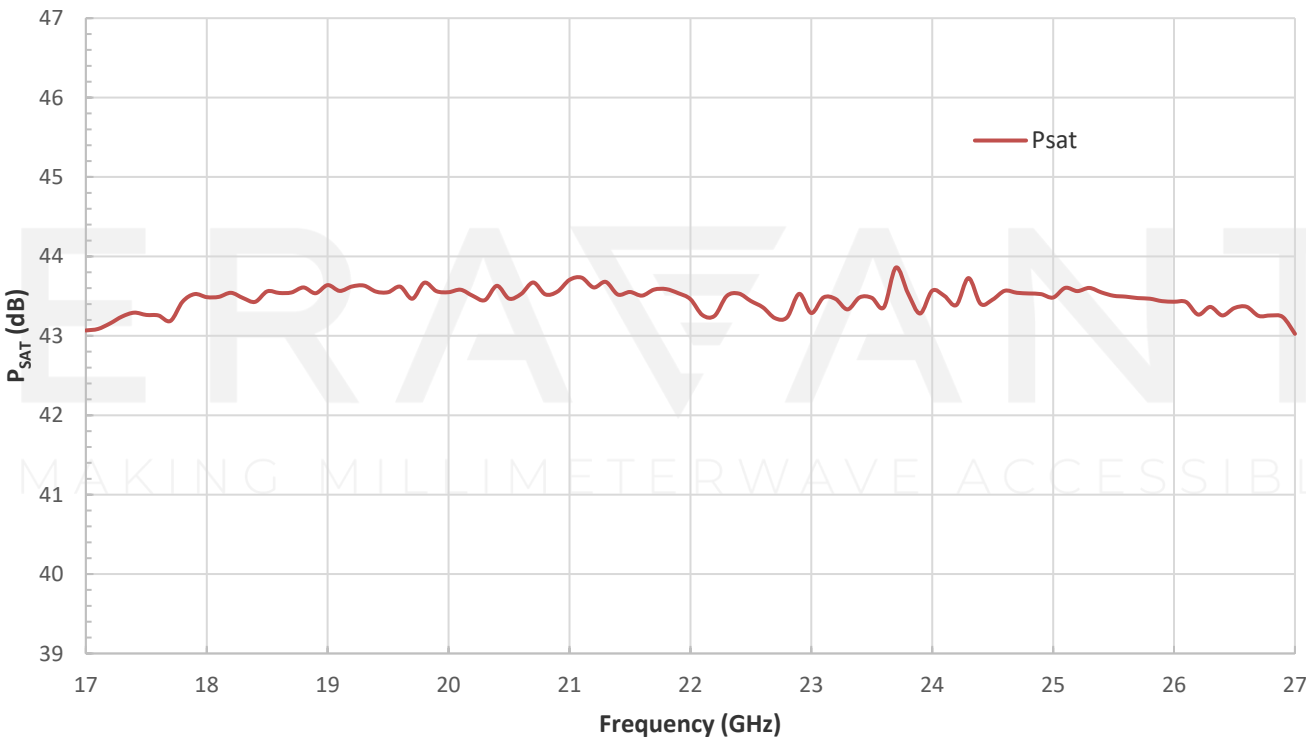

Typical PAE vs. Frequency

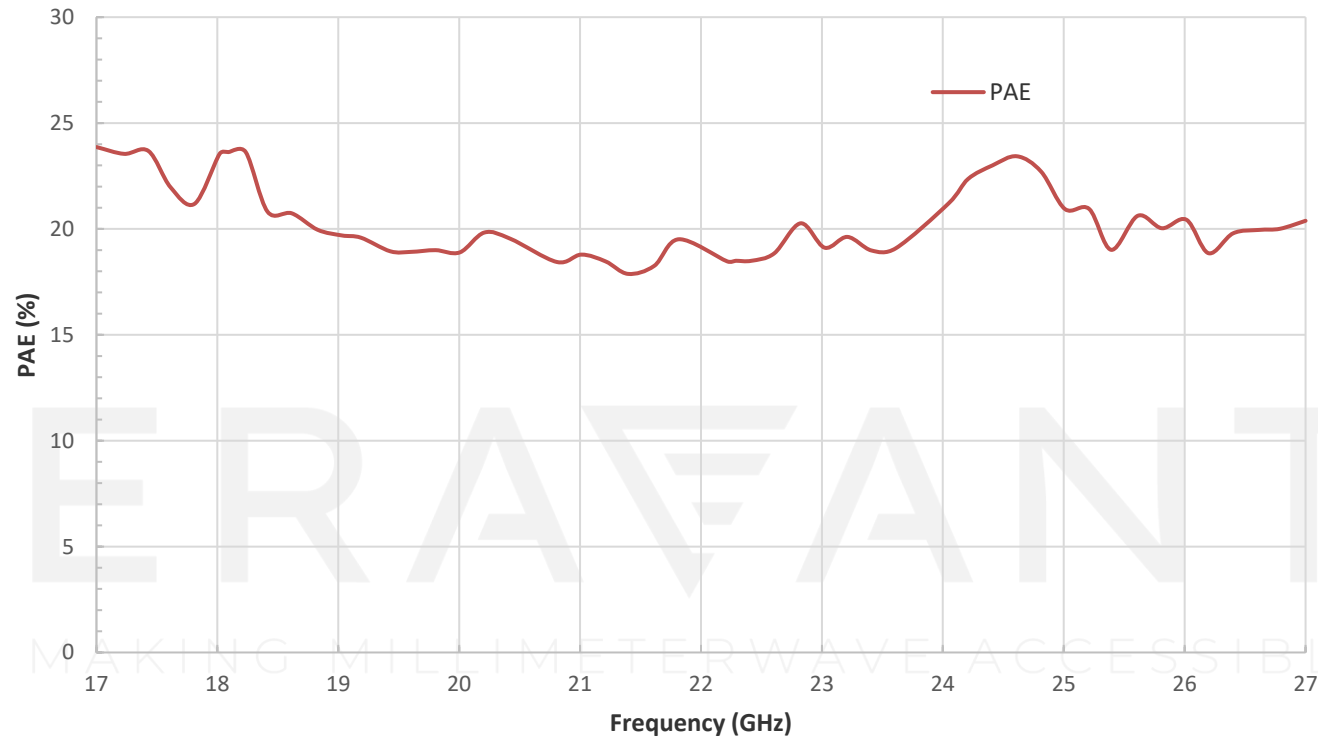


Typical Return Loss vs. Frequency

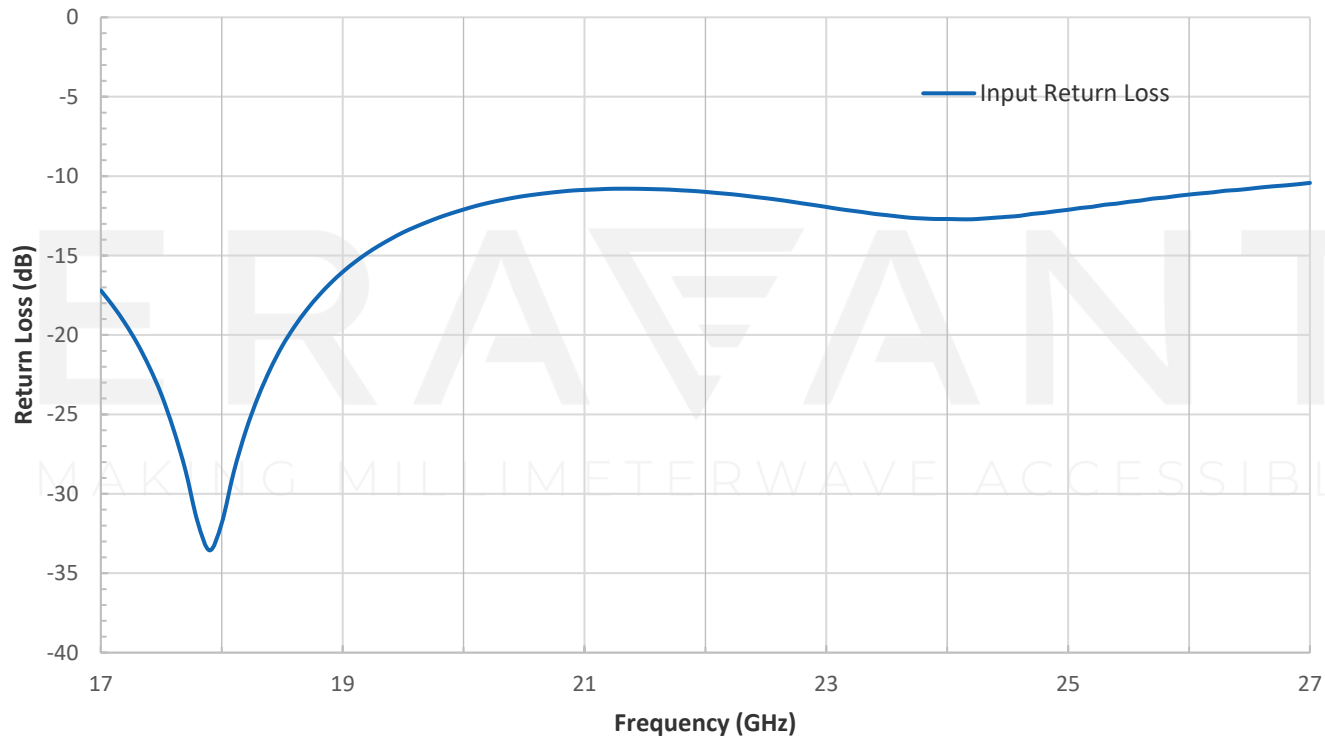

SBP-1732735343-KFKF-EP

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

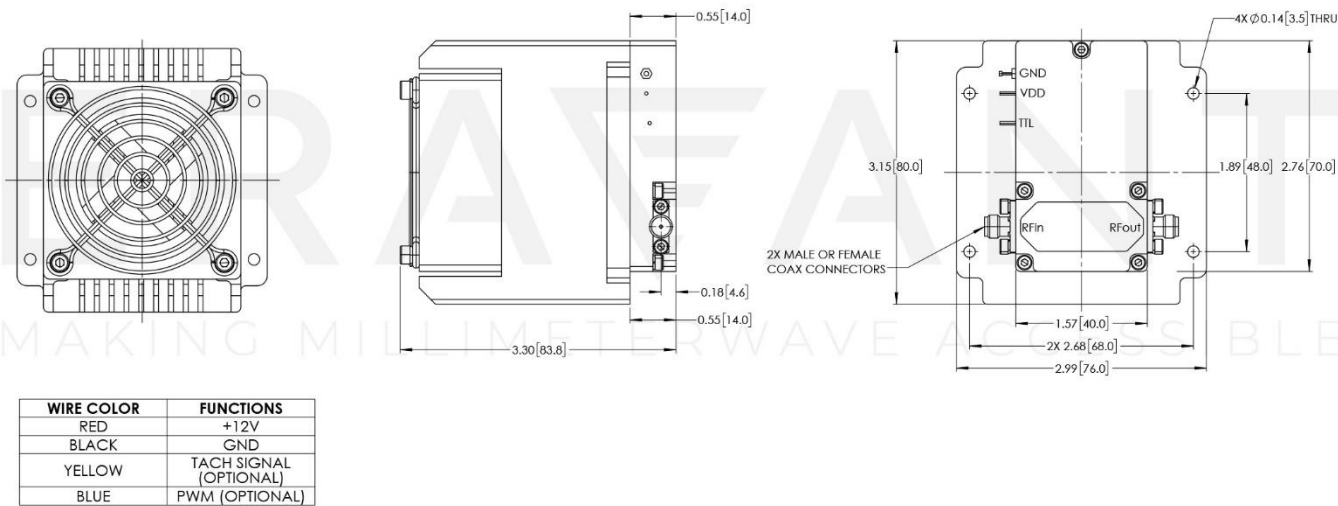

**NOTE:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- Do not block the air inlets and outlets.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Do not plug or unplug any connectors when amplifier is activated. All connectors must be connected/disconnected when amplifier is off.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary
- Any foreign objects in the waveguide will degrade performance and/or damage the device.
- Proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model SCH-08008-S1 is highly recommended.