

## SBP-2734033526-2828-E1

### Ka-Band Power Amplifier, 26.5 to 40 GHz, 35 dB Gain, +26 dBm P<sub>1dB</sub>

**SBP-2734033526-2828-E1** is a Ka band power amplifier with a typical small signal gain of 35 dB and a nominal P<sub>1dB</sub> of +26 dBm across the frequency range of 26.5 to 40 GHz. The DC power requirement for the amplifier is +8 V<sub>DC</sub>/1,100 mA. The mechanical configuration is an inline structure with WR-28 Uni-Guide™ waveguides. Other port configurations, such as K connectors for either the input or output port, are also available under different model numbers.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	26.5 GHz		40.0 GHz
Gain		35 dB	
P <sub>1dB</sub>		+26 dBm	
P <sub>SAT</sub>		+27 dBm	
Operational P <sub>in</sub>			+18 dBm
Absolute (Damage) P <sub>in</sub>			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V <sub>DC</sub>	+12 V <sub>DC</sub>
DC Supply Current		1,100 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

### Mechanical Specifications:

Item	Specification
Input Port	WR-28 Uni-Guide™ Waveguide with UG-599/U Compatible Flange
Output Port	WR-28 Uni-Guide™ Waveguide with UG-599/U Compatible Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	2.0 Oz
Size	2.05" (L) x 1.20" (W) x 0.75" (H)
Outline	BG-SA-2

### ECCN

3A001.b.4

### FEATURES

- Full Waveguide Band Coverage
- High Gain
- High Output Power
- Good Power and Gain Flatness

### APPLICATIONS


- 5G Systems
- Radar Systems
- Communication Systems
- Test Equipment

### SUPPLEMENTAL DETAILS




Typical Gain and Return Loss vs. Frequency

Bias = +8 V<sub>DC</sub>/1,100 mA

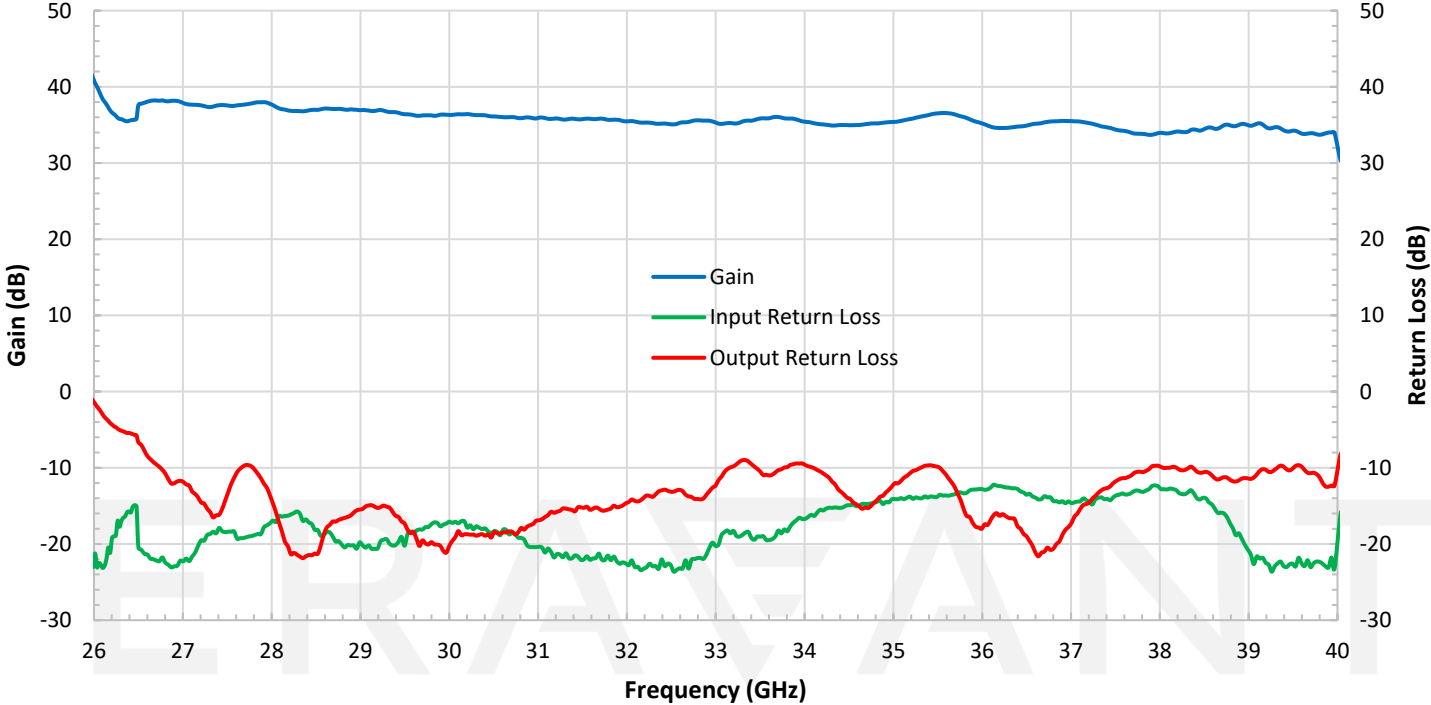


Typical Output P<sub>1dB</sub> and Psat vs. Frequency

Bias: +8 V<sub>DC</sub>/1,300 mA

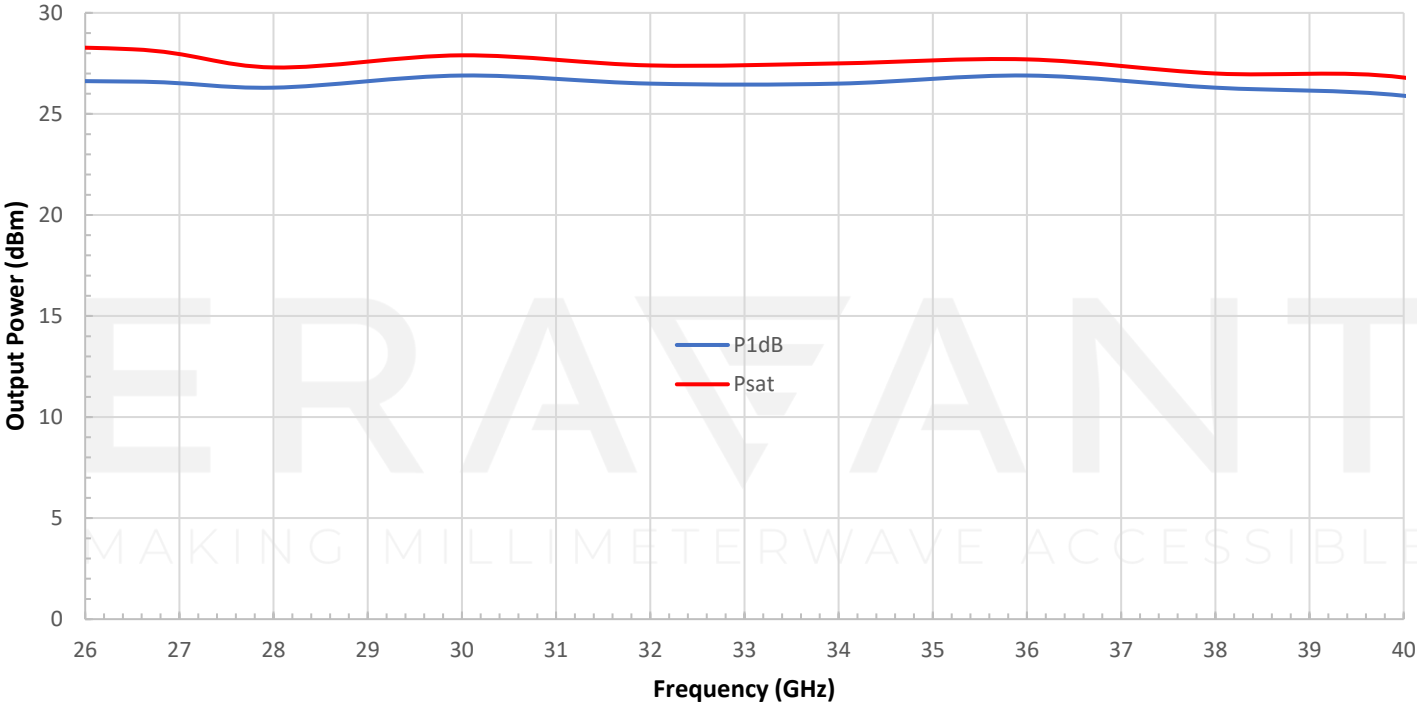

## SBP-2734033526-2828-E1

**Mechanical Outline:** Unless otherwise specified, all dimensions are in inches [millimeters]

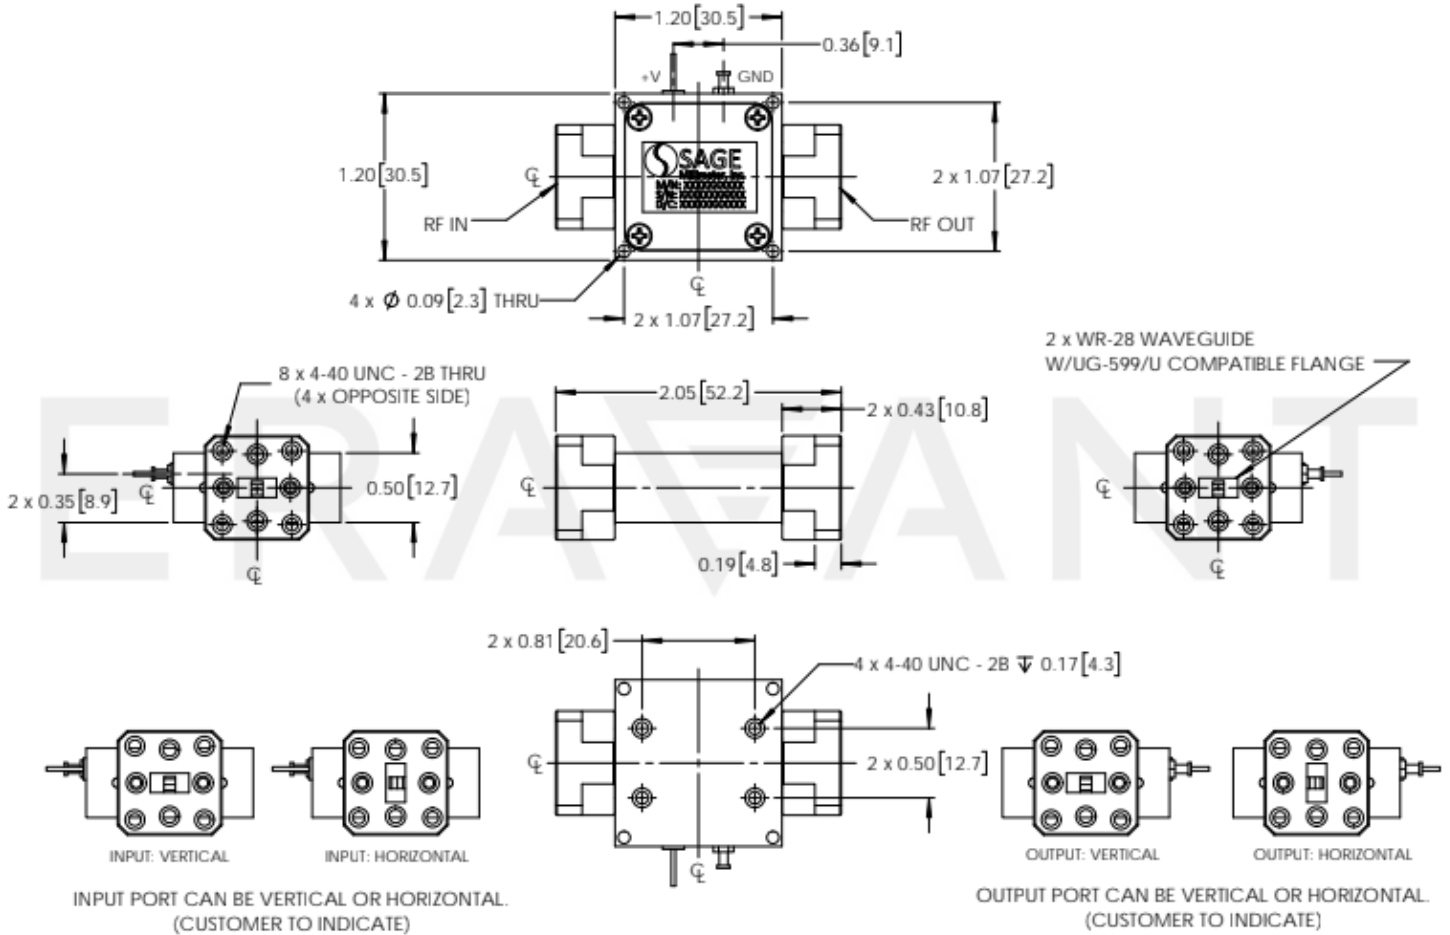

### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- The amplifier employs Eravant's trademarked and patent pending technology, the **Uni-Guide™**, as its waveguide interfaces. The orientation of the input and the output waveguides can be specified through corresponding model numbers. For example, the model number for a horizontal output waveguide configuration would be **SBP-2734033526-2828H-E1** instead of the default **SBP-2734033526-2828-E1** which indicates vertical orientation output.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- Exceeding the maximum bias voltage of **+12 V<sub>DC</sub>** will cause amplifier overheating and result the instability.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.