




26.5 to 41 GHz Power Amplifier, 25 dB Gain, +30 dBm P_{1dB}

Description:

Model SBP-2734132530-28KF-E1-HR is a power amplifier with a typical small signal gain of 25 dB and a nominal P_{1dB} of +30 dBm across the frequency range of 26.5 to 41 GHz. The DC power requirement for the amplifier is +8 V_{DC}/4 A. The mechanical configuration is an inline structure with WR-28 Uni-Guide™ waveguide as its input port and K(F) connector as its output port. Other port configurations, such as K connectors and WR-28 waveguides for either the input or output port, are also available under different model numbers.

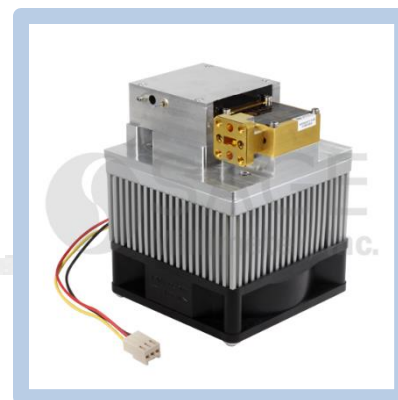

Features:

- Broadband Performance
- High Output Power
- Good Power and Gain Flatness

Applications:

- 5G System
- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		41 GHz
Gain		25 dB	
P _{1dB}		+30 dBm	
P _{sat}		+32 dBm	
P _{in}			+10 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+12 V _{DC}
DC Supply Current (Under RF Drive)		4 A	
Supply Voltage to Fan		+12 V _{DC}	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Parameter	Connector
Input	WR-28 Uni-Guide™ Waveguide with UG-599/U Compatible Flange
Output	2.92 mm (K) Female
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.4 lbs.
Size	3.15" (L) X 3.15" (W) X 3.83" (H)
Outline	BG-SA-2WC-BR-H95






26.5 to 41 GHz Power Amplifier, 25 dB Gain, +30 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency

Bias = +8 V_{DC}/2,300 mA

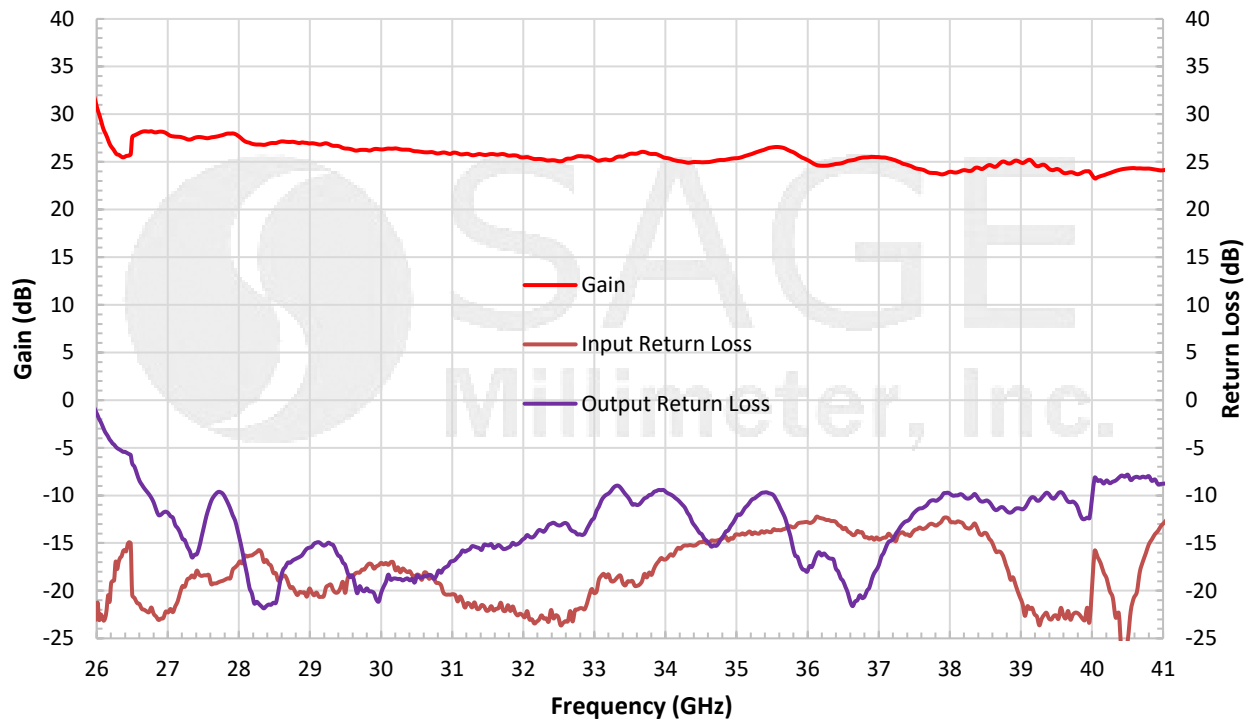

Typical Output P_{1dB} and Psat vs. Frequency


Bias = +8 V_{DC}/4,000 mA

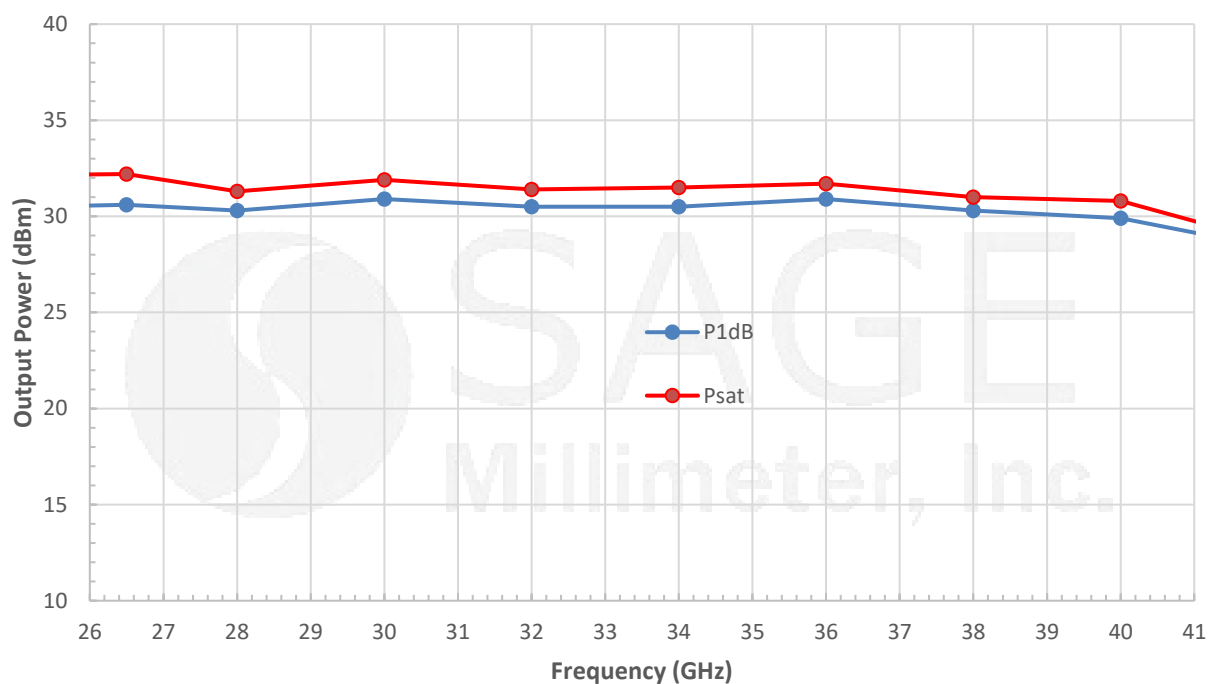



26.5 to 41 GHz Power Amplifier, 25 dB Gain, +30 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

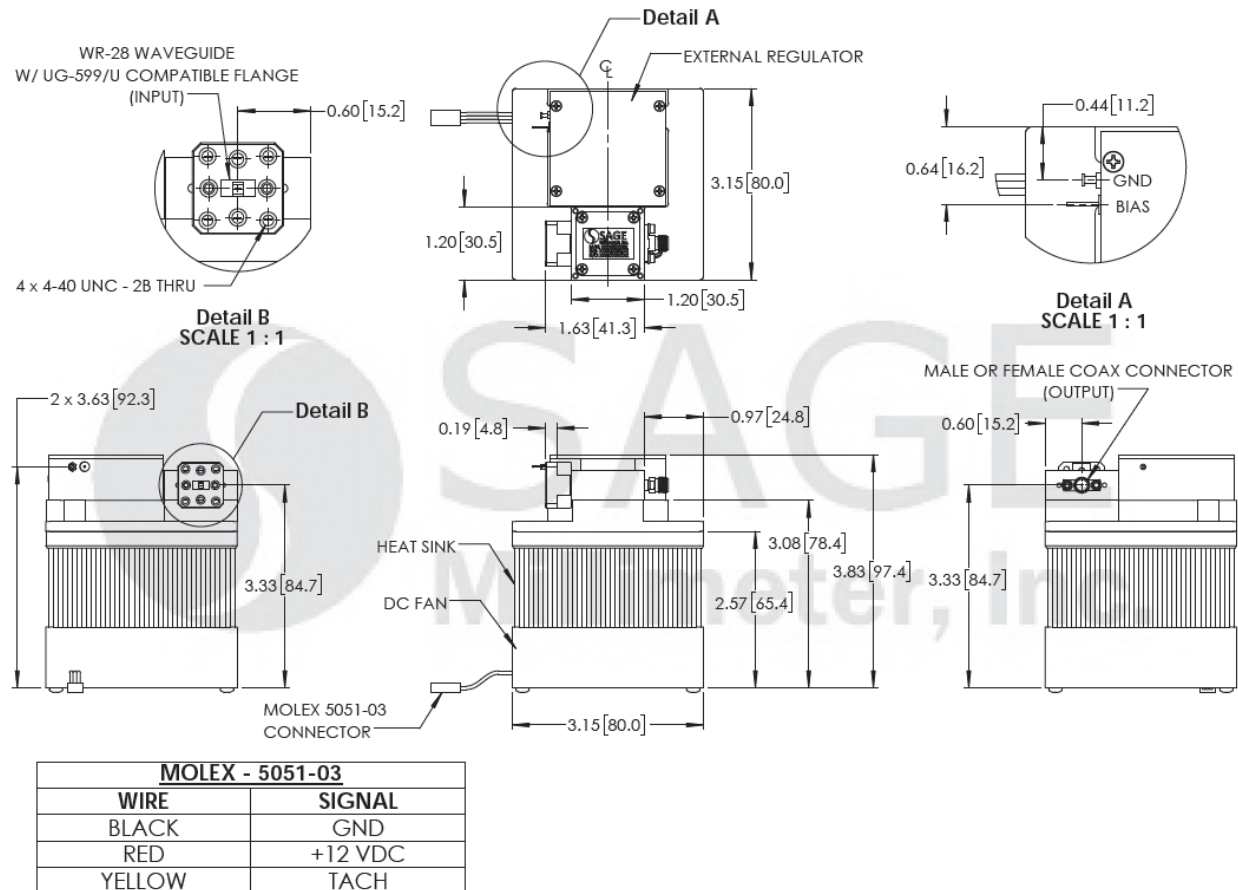

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- The amplifier employs SAGE Millimeter’s trademarked and patent pending technology, **Uni-Guide™**, as its waveguide interfaces. The orientation of the input and the output waveguides can be specified through corresponding model numbers. For example, the model number for a horizontal output waveguide configuration would be **SBP-2734132530-28HKF-E1-HR** instead of the default **SBP-2734132530-28KF-E1-HR** which indicates vertical orientation output.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.



26.5 to 41 GHz Power Amplifier, 25 dB Gain, +30 dBm P_{1dB}

- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

