



Ka-Band Power Amplifier, 31 to 38 GHz, 40 dB Gain, +34 dBm P_{1dB}

Description:

Model SBP-3133834034-KFKF-C1-2 is a power amplifier with a typical small signal gain of 40 dB and a nominal P_{1dB} of +34 dBm across the frequency range of 31 to 38 GHz. The DC power requirement for the amplifier is +8 V_{DC}/ 4 A under RF drive. The RF connectors are female K connectors. Other port configurations, such as male K connectors and WR-28 waveguides are also available under different model numbers.



Features:

- Broad Band Operation
- High Gain
- High Output Power

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	31 GHz		38 GHz
Gain		40 dB	
P _{1dB}		+34 dBm	
P _{sat}		+35 dBm	
P _{in}			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V _{DC}	
DC Supply Current (Under RF Drive)		4 A	
Supply Voltage to Fan		+12 V _{DC}	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	K(F)
Output Port	K(F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.07 lb
Size	3.15" (W) X 3.15" (L) X 3.48" (H)
Outline	BK-SC-C1-H






Ka-Band Power Amplifier, 31 to 38 GHz, 40 dB Gain, +34 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency

V_{IN}: +8 V_{DC}/2.4 A

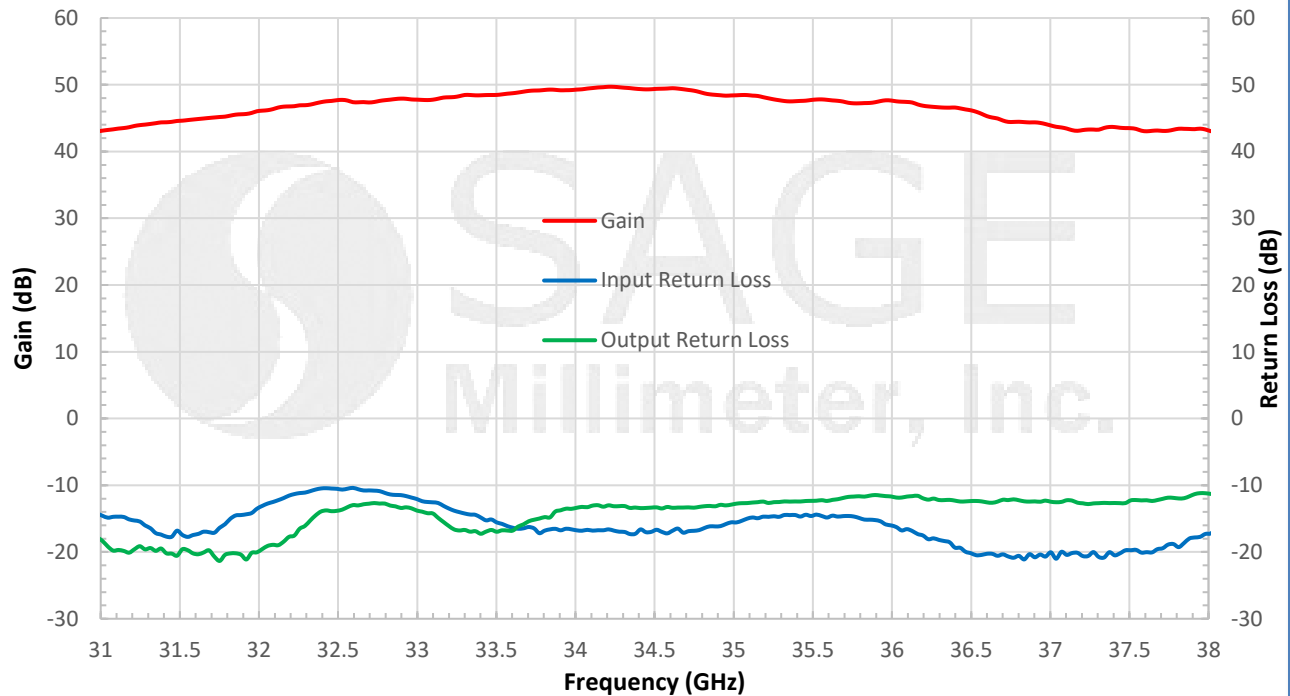

Typical P_{1dB} and P_{sat} vs. Frequency


V_{IN}: +8 V_{DC}/4 A

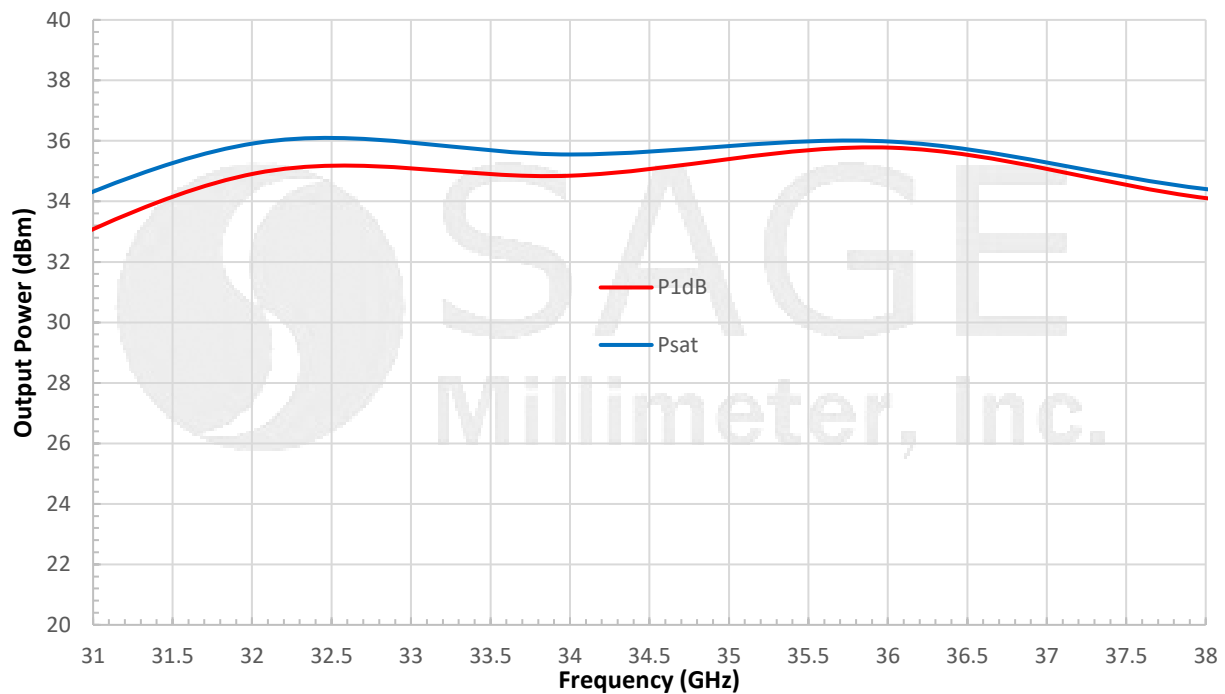



Ka-Band Power Amplifier, 31 to 38 GHz, 40 dB Gain, +34 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

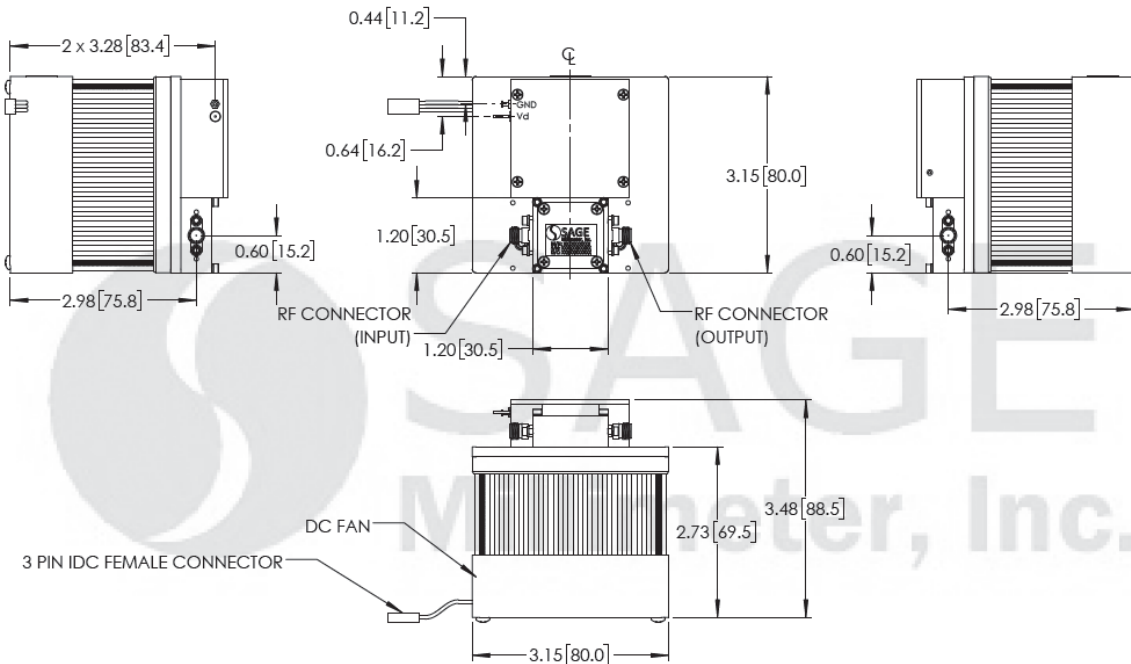

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

