

37 to 43 GHz GaN Power Amplifier, 35 dB Gain, +38 dBm P_{sat}

Description:

Model SBP-3734333538-2222-E1-HR is a GaN power amplifier with a typical small signal gain of 35 dB and a nominal P_{sat} of +38 dBm across the frequency range of 37 to 43 GHz. The DC power requirement for the amplifier is +15 V_{DC}/3.7 A. The mechanical configuration offers an inline structure with WR-22 UniGuide™ waveguides. Other port configurations, such as 2.4 mm connectors for either the input or output port, are also available under different model numbers.



Features:

- High Output Power
- Good Power and Gain Flatness

Applications:

- 5G System
- Test Equipment



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	37 GHz		43 GHz
Gain		35 dB	
P_{1dB}		+34 dBm	
P_{sat}		+38 dBm	
P_{in}			+10 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+14 V _{DC}	+15 V _{DC}	+17 V _{DC}
DC Supply Current (Under RF Drive)		3.7 A	
Supply Voltage to Fan		+12 V _{DC}	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Item	Specification
Input	WR-22 Uni-Guide™ Waveguide with UG-383/U Anti-Cocking Flange
Output	WR-22 Uni-Guide™ Waveguide with UG-383/U Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	17 Oz
Size	3.15" (L) X 3.15" (W) X 3.90" (H)
Outline	BG-SQ-2-A-BR-H95

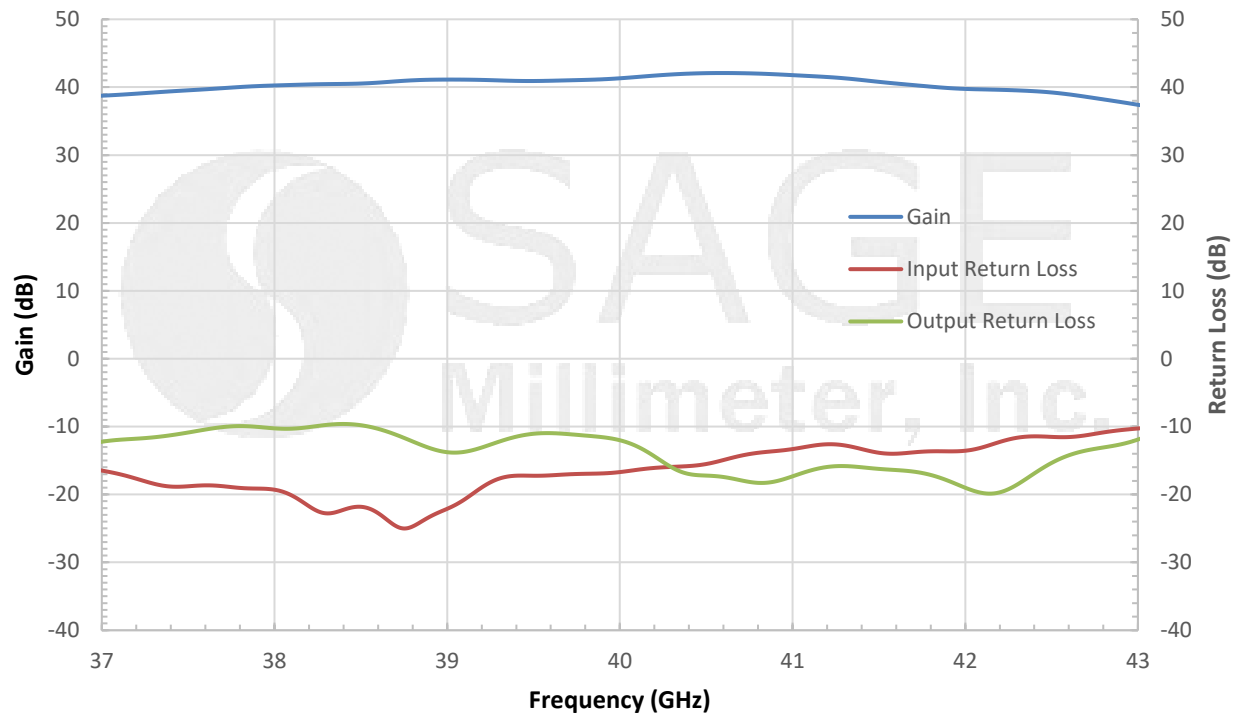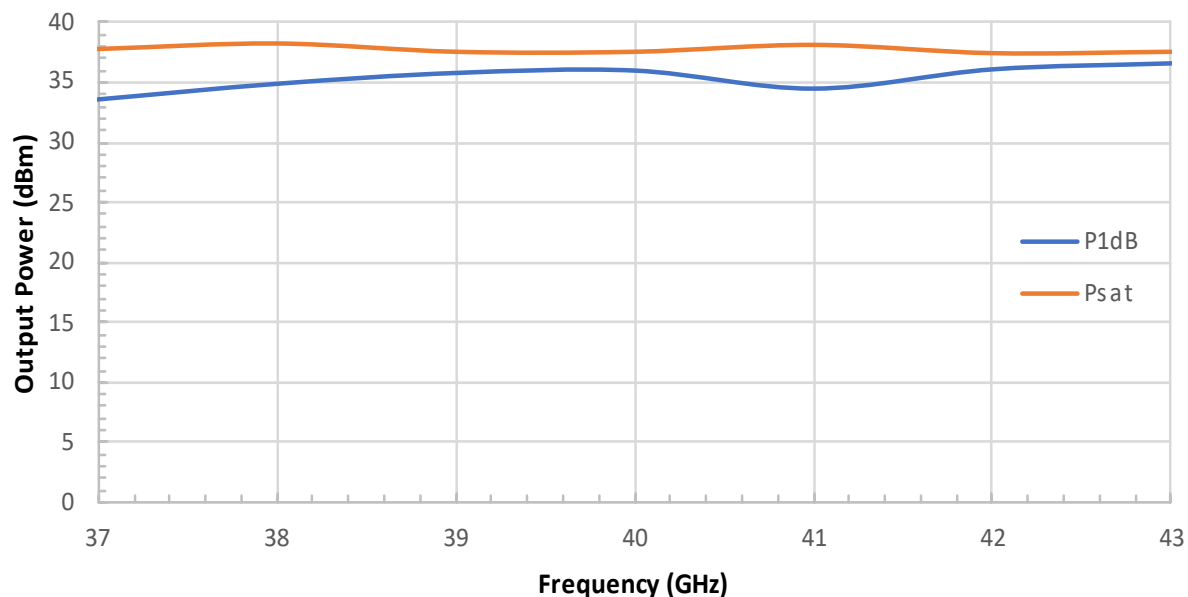


**37 to 43 GHz GaN Power Amplifier, 35 dB Gain, +38 dBm P_{sat}****Gain and Return Loss vs. Frequency**Bias: +15 V_{DC}/ 1.7 A**Output Power vs. Frequency**Bias: +15V_{DC}/3.7A


37 to 43 GHz GaN Power Amplifier, 35 dB Gain, +38 dBm P_{sat}

P-in vs. P-out

RF Input: 40 GHz

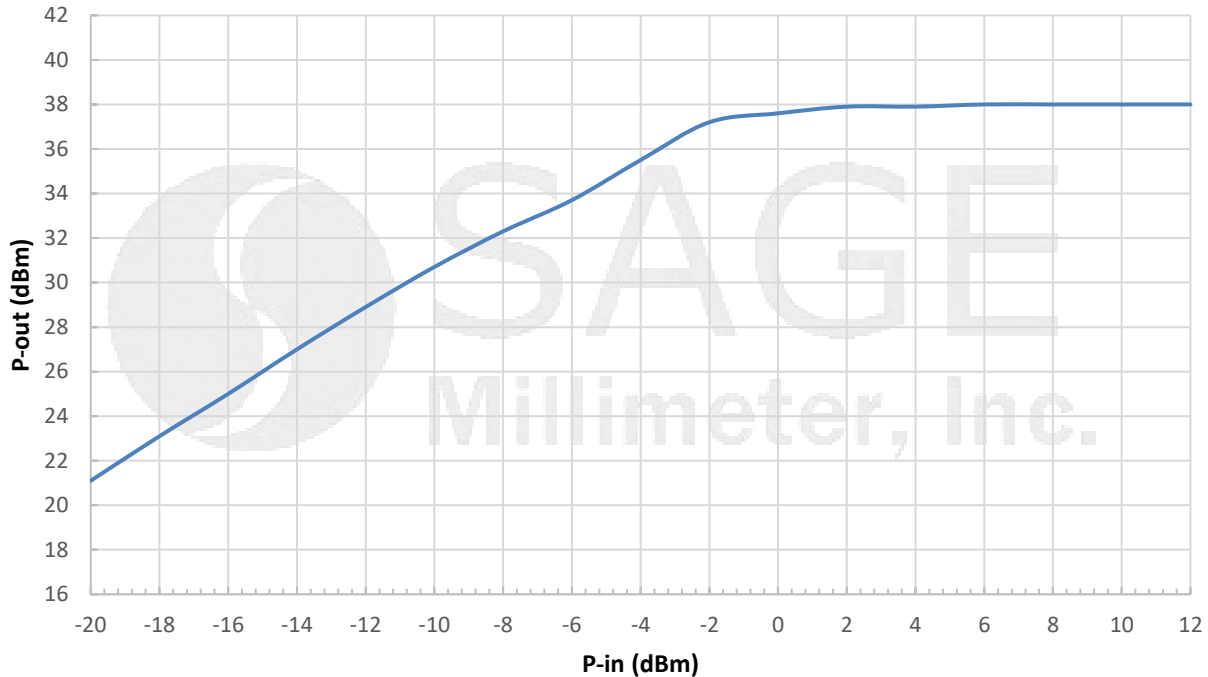

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

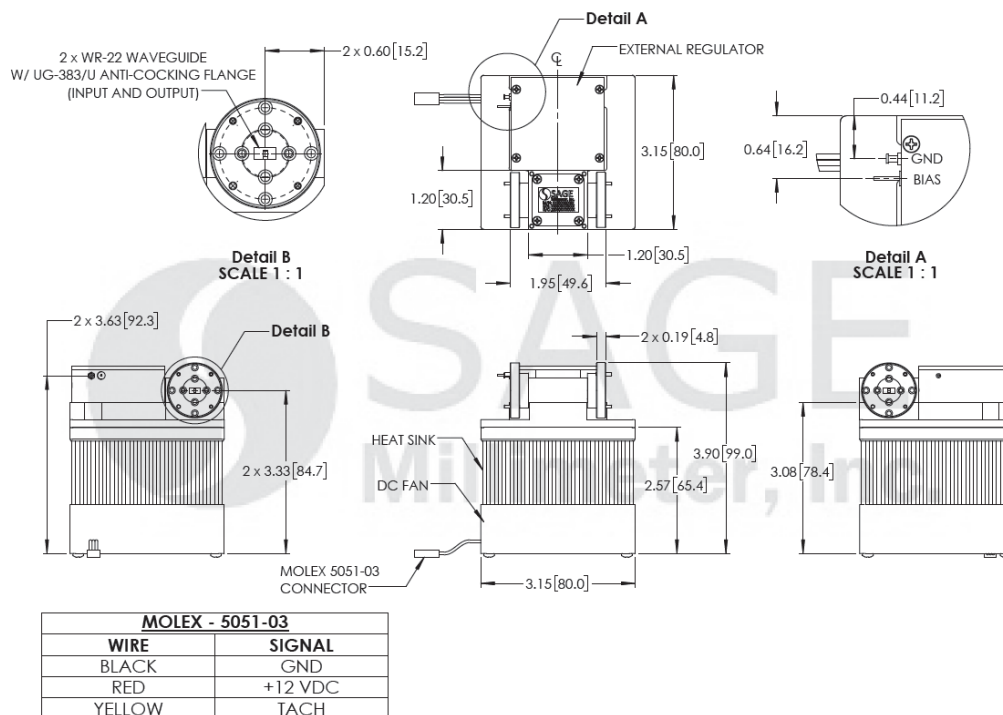



37 to 43 GHz GaN Power Amplifier, 35 dB Gain, +38 dBm P_{sat}

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.
- The amplifier employs Eravant's trademarked and patent pending technology, UniGuide™, as its waveguide interfaces. The orientation of the input and the output waveguides can be specified through corresponding model numbers. For example, the model number for a horizontal output waveguide configuration would be **SBP-3734333538-2222H-E1-HR** instead of the default **SBP-3734333538-2222-E1-HR** which indicates vertical orientation output.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

