



U-Band Power Amplifier, 40 to 60 GHz, 15 dB Gain, +19 dBm P_{1dB}

Description:

Model SBP-4036031519-VF19-E1 is a U band power amplifier with a typical small signal gain of 15 dB and a nominal P_{1dB} of +19 dBm in the frequency range of 40 to 60 GHz. The DC power requirement for the amplifier is +8 V_{DC}/300 mA. The mechanical configuration is an inline structure with a V(F) connector as its input port and a WR-19 Uni-Guide™ waveguide as its output port. Other port configurations, such as an in line structure with WR-19 waveguides or 1.85 mm connectors for either the input or output port, are also available under different model numbers.



Features:

- Broadband Performance
- High Output Power
- High Gain

Applications:

- New 5G Bands
- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	40 GHz		60 GHz
Gain		15 dB	
P _{1dB}		+19 dBm	
P _{sat}		+20 dBm	
P _{in}			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V _{DC}	+12 V _{DC}
DC Supply Current		300 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	1.85 mm (F) Connector
Output Port	WR-19 Uni-Guide™ Waveguide with a UG-383/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.59" (L) X 1.20" (W) X 1.13" (H)
Outline	FA-SU-2CW-A






U-Band Power Amplifier, 40 to 60 GHz, 15 dB Gain, +19 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/300mA

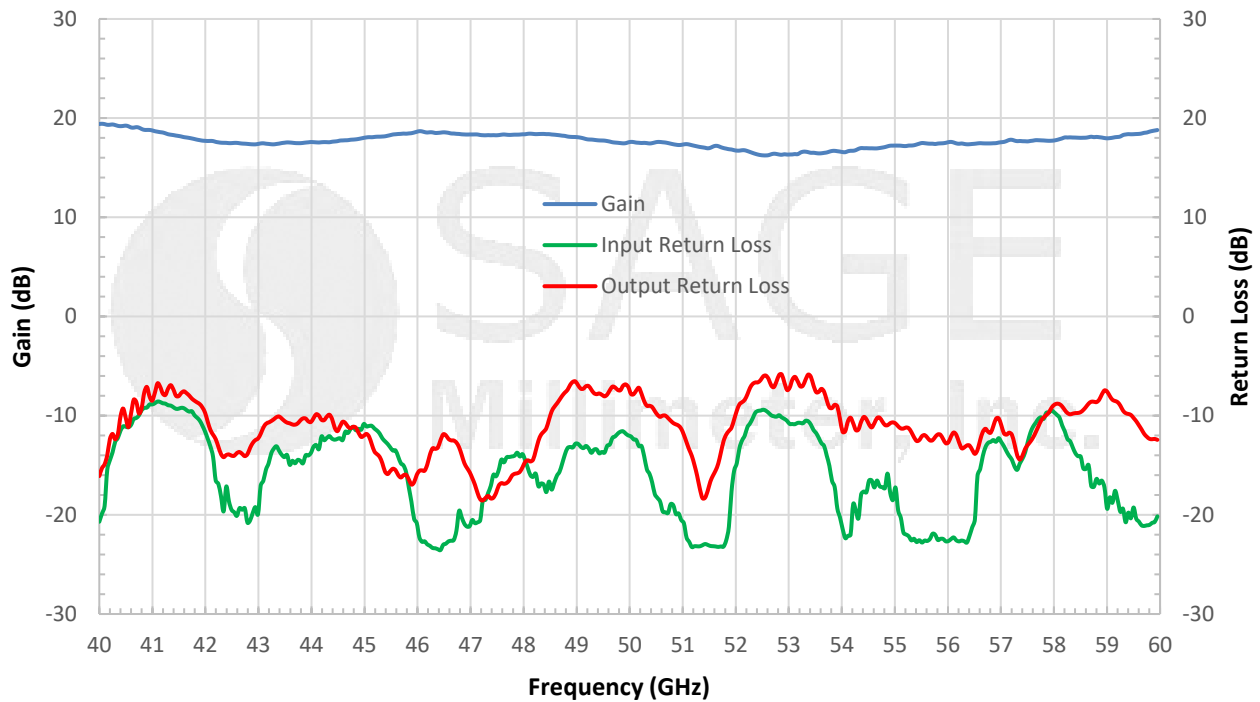

Typical P_{1dB} vs. Frequency


Bias: +8 V_{DC}/350 mA

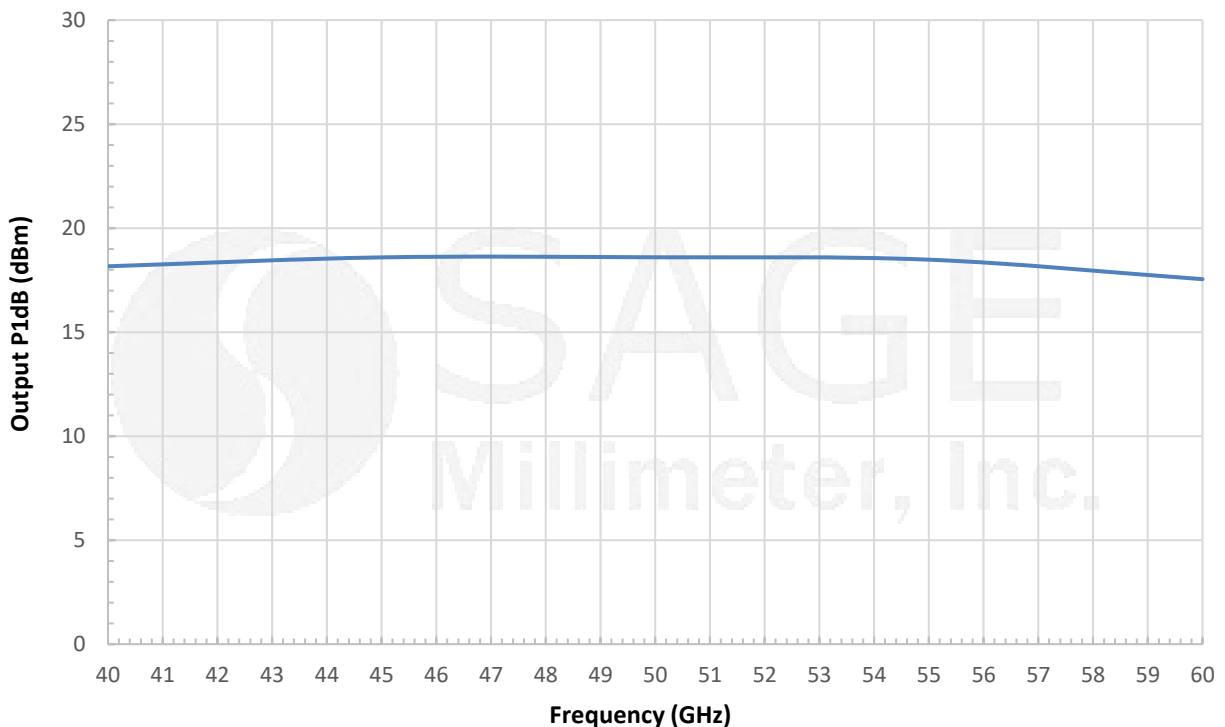



U-Band Power Amplifier, 40 to 60 GHz, 15 dB Gain, +19 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

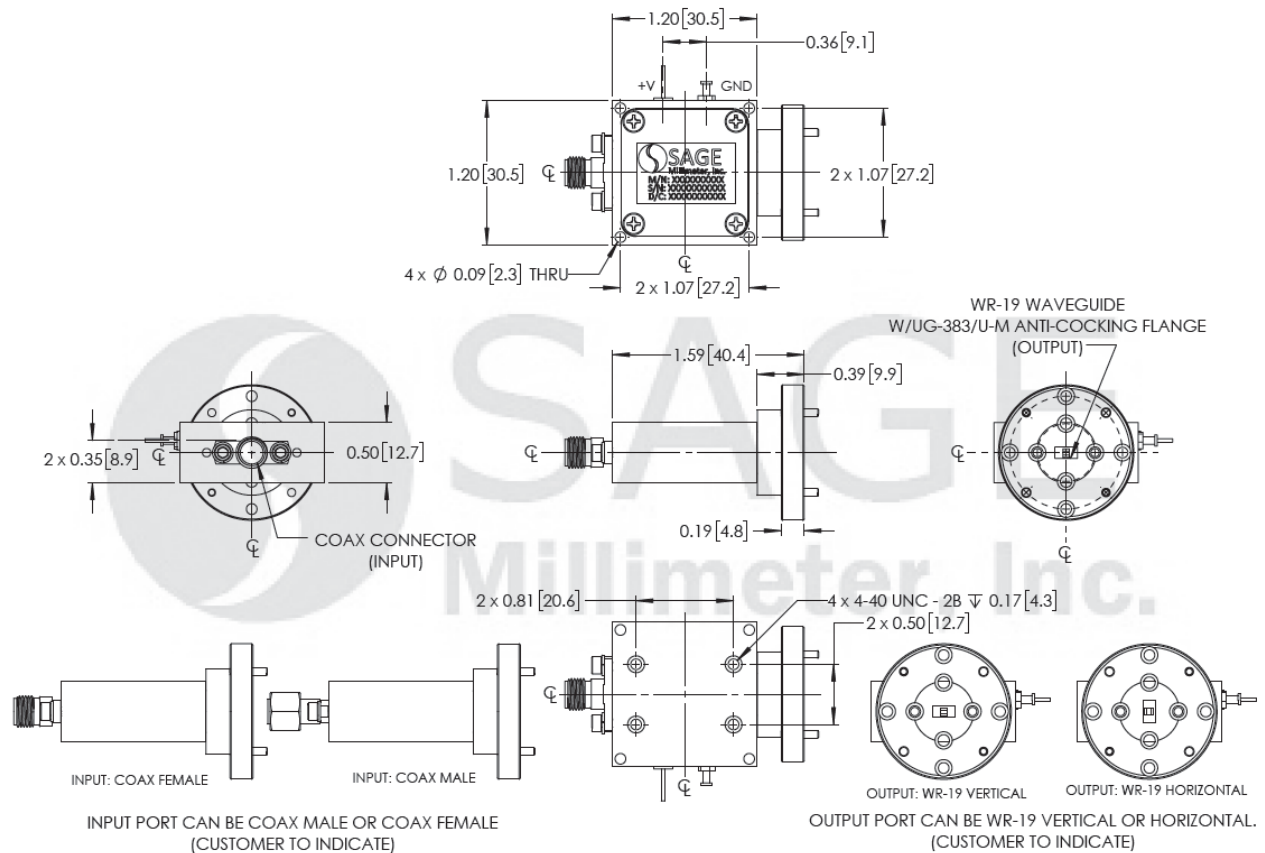

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- The amplifier employs SAGE Millimeter's trademarked and patent pending technology, the **Uni-Guide™**, as its waveguide interfaces. The orientation of the input and the output waveguides can be specified through corresponding model numbers. For example, the model number for a horizontal output waveguide configuration would be **SBP-4036031519-VF19H-E1** instead of the default **SBP-4036031519-VF19-E1** which indicates vertical orientation output.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.



U-Band Power Amplifier, 40 to 60 GHz, 15 dB Gain, +19 dBm P_{1dB}

- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.4 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

