

SBP-5036333136-VFVF-EP

50 to 63 GHz, Power Amplifier, 31 dB Gain, +36 dBm P_{sat}

SBP-5036333136-VFVF-EP is a V-Band, GaN power amplifier with a typical small signal gain of 31 dB and a nominal P_{sat} of +36 dBm across the frequency range of 50 to 63 GHz. The DC power requirement for the amplifier is +18 V_{DC}/ 2 A. The mechanical configuration offers an in-line structure with WR-15 waveguides and UG-385/U anti-cocking flanges. A heat sink is included for cooling.

**Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Frequency Range	50 GHz		63 GHz
Small Signal Gain		31 dB	
P _{Sat}		+36 dBm	
Input Return Loss		8 dB	
Output Return Loss		8 dB	
DC Voltage		+18 V _{DC}	
DC Supply Current (Saturated)		2 A	
Fan DC Voltage		+12 V _{DC}	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

ECCN

3A001.b.4

FEATURES

- Forced Air Cooling
- In-line Port Configuration
- High Power Output

APPLICATIONS


- Communications Systems
- Test Equipment
- Radar Systems

SUPPLEMENTAL DETAILS**Mechanical Specifications:**

Item	Specification
Input/Output Ports	1.85 mm Female
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated, Black Anodize
Weight	20 Oz.
Outline	BP-HC-H4

SBP-5036333136-VFVF-EP

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

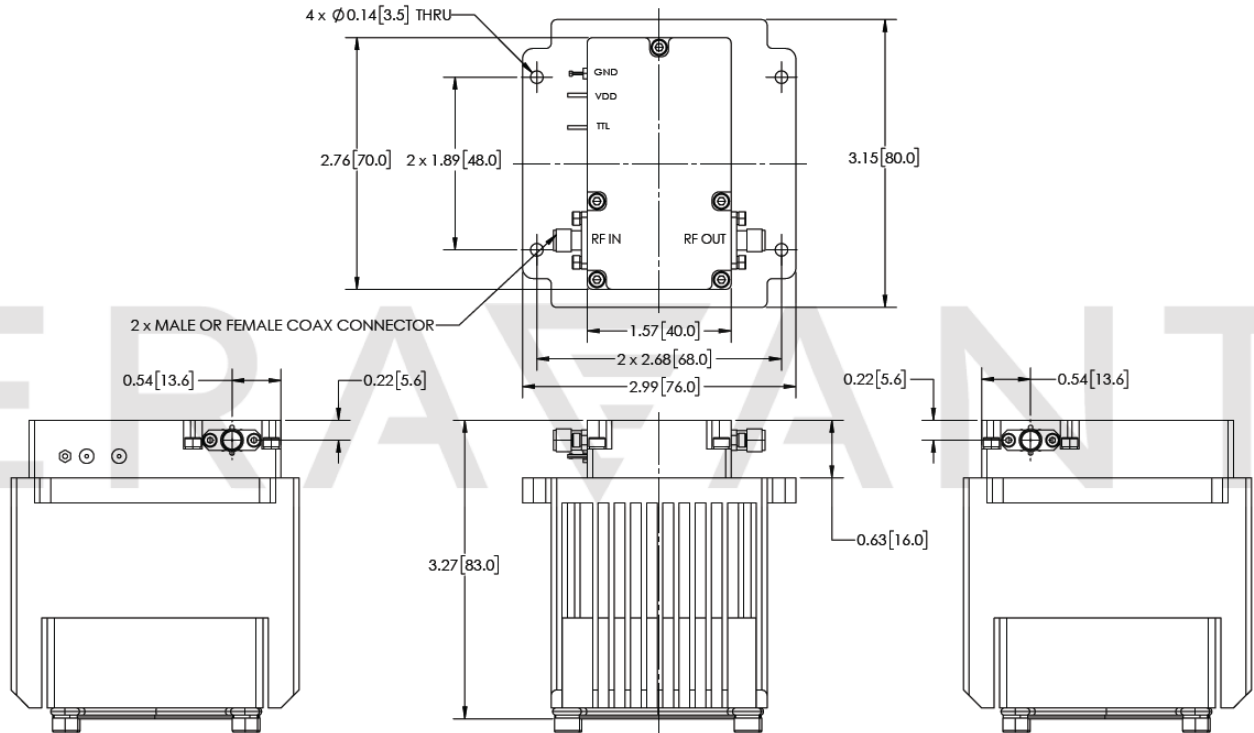

NOTE:

- The product picture does not represent the final product.
- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- Other mechanical configurations with other frequency bands are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed **+50°C**.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.