



W-Band 8th Harmonic Mixer, 75 to 110 GHz

Description:

Model SFH-7531140830-10SF5F-N1 is a W-Band 8th harmonic mixer. The mixer employs high performance, GaAs Schottky flip chip diodes and a balanced configuration to produce superior RF performance. With an IF range of DC to 3 GHz, the harmonic mixer uses the harmonic number 8 of a 9.3 to 14 GHz LO at +16 dBm to translate 75 to 110 GHz. The harmonic mixer has a typical conversion loss of 30 dB.



Features:

- Full Waveguide Band Operation
- No External Bias Required
- 8th Harmonic Detection

Applications:

- Radar System
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	75 GHz		110 GHz
LO Frequency	9.3 GHz		14 GHz
IF Range	DC		3 GHz
Input Power		+16 dBm	+19 dBm
Harmonic Number		8	
Conversion Loss		30 dB	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
RF Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
LO Port	SMA (F)
IF Port	SMA (F)
Case Material	Brass
Finish	Gold Plated
Weight	5.4 Oz
Size	1.5"(L) x 1.2"(W) X 1.75"(H)
Outline	FH-W2-A-2





W-Band 8th Harmonic Mixer, 75 to 110 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

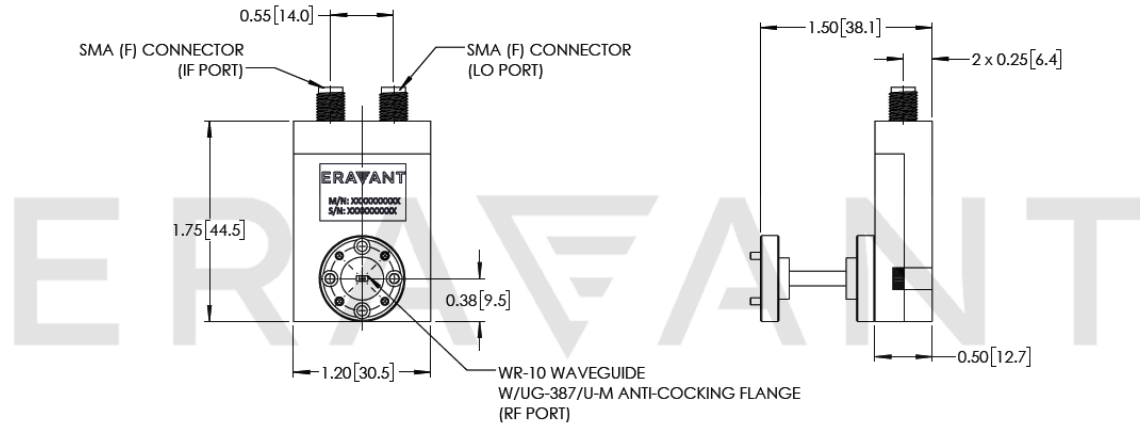

Note:

- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the mixer will damage the device.
- Any foreign objects in the waveguide will degrade performance and/or damage the device.
- The mixer is a static sensitive device. Always follow ESD rules when working with the mixer.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

