


SFM-30340313-KFKFSF-N1-M

Ka-Band Single Side Band Modulator, 30 to 40 GHz

SFM-30340313-KFKFSF-N1-M is a Ka Band single side band modulator that covers the frequency range of 30 to 40 GHz. The typical conversion loss of the modulator is 13 dB with the quadrature IF driving signals of $\pm 10 V_{p-p}/2$ mA for both I and Q ports, typically. The typical input/output isolation and image rejection is 20 dB, respectively. In addition, the modulator can be used as an I/Q mixer or image rejection mixer by using one of the RF ports as LO port or adding the IF hybrid coupler when used as the image mixer. These products are offered under **SFQ** family.

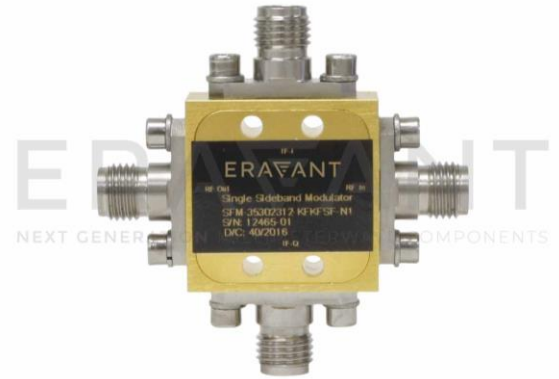

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Input RF Frequency Range	30 GHz		40 GHz
Output RF Frequency Range	30 GHz		40 GHz
IF Frequency Range	DC		5.0 GHz
IF I/Q Port Signal Amplitude		$\pm 10 V_{p-p}/2$ mA	$\pm 15 V_{p-p}/5$ mA
IF I/Q Port Signal Phase		$\pm 90^\circ$	
Conversion Loss		13 dB	15 dB
RF In to RF Out Isolation		20 dB	
Image Rejection		20 dB	
RF Damage Power			+16 dBm
Specification Temperature		+25°C	
Operating Temperature	0°C		+85°C

Mechanical Specifications:

Item	Specification
RF IN	K (F)
RF OUT	K (F)
IF-I	SMA (F)
IF-Q	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.68 Oz
Outline	UH-235-4C

ECCN

EAR99

FEATURES

- Compact Package
- Low Conversion Loss
- High Port Isolations
- IF Port DC Coupled for Phase Detection

APPLICATIONS

- Phase Detection
- Speed and Ranging Radar Systems
- Communication Systems
- Test Equipment


SUPPLEMENTAL DETAILS




SFM-30340313-KFKFSF-N1-M

Conversion Loss vs Frequency

RF Input power: -20 dBm; IF Driving Level: $\pm 10 V_{DC}/2 \text{ mA}$

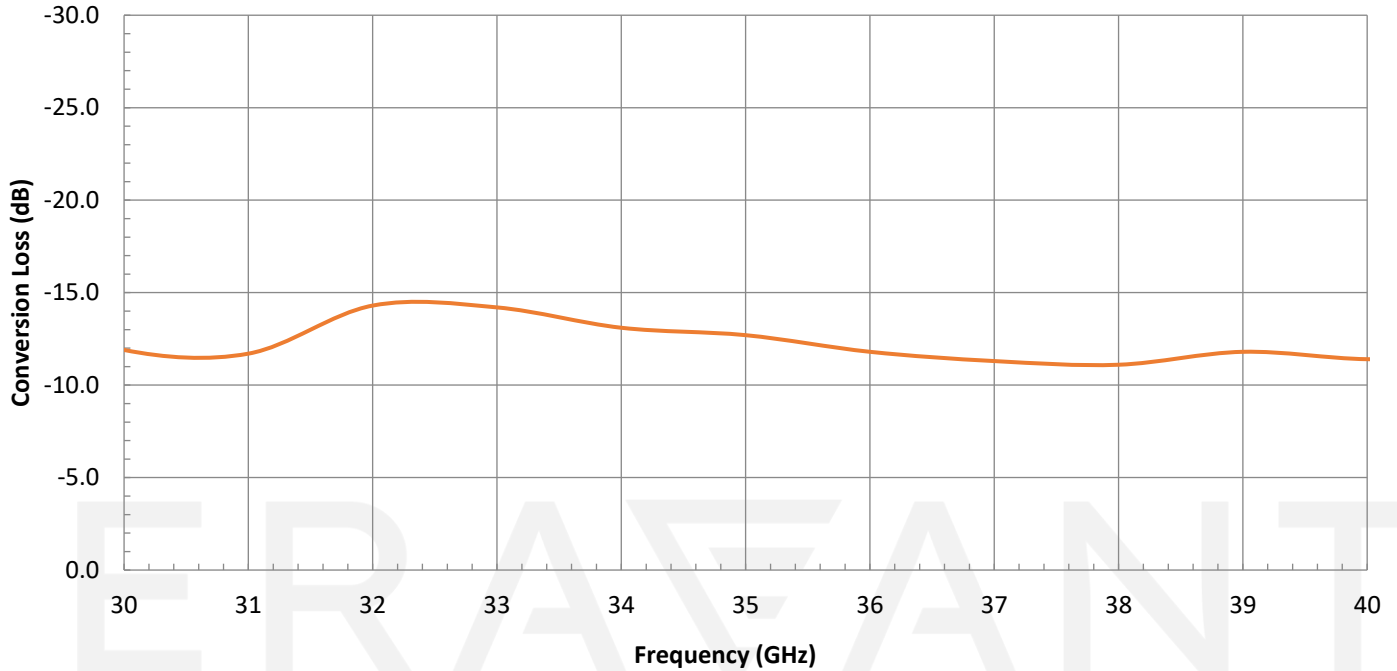

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

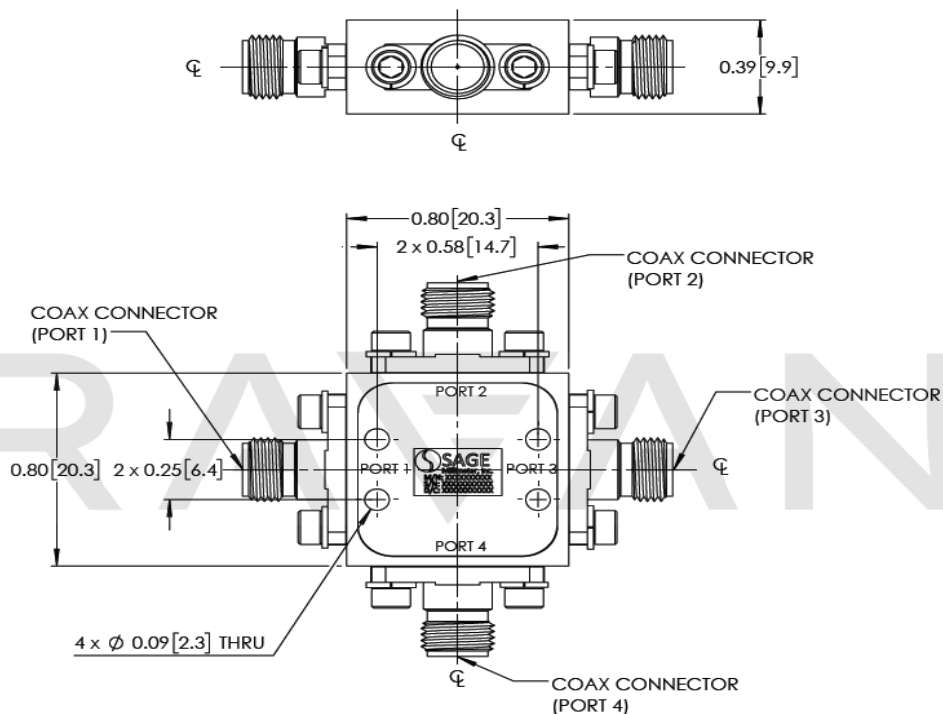

NOTE:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- The I/Q mixer can be configured as an image rejection mixer or used as an I/Q up-converter, single sideband modulator and phase detector that are offered in different product families with the dedicate model numbers.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings will damage the device.
- The modulation current is the dominate parameter to observe while the modulation amplitude is a reference value. Exceeding the modulation current will damage the device.
- The mixer is a static sensitive device. Always follow ESD rules when working with the device.
- The IF ports are DC coupled. Use DC blocks if necessary. **Do not apply an external bias voltage to the IF port.**
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model SCH-06004-S1 is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE