

V-Band Power Amplifier, 50 to 70 GHz, 35 dB Gain, +22 dBm P_{1dB}**Description:**

Model SBP-5037033522-1515-E1 is a power amplifier with a typical small signal gain of 35 dB and a nominal P_{1dB} of +22 dBm across the frequency range of 50 to 70 GHz. The DC power requirement for the amplifier is +8 V_{DC}/1450 mA. The input and output ports are WR-15 Waveguide with UG-385/U Anti-Cocking Flange. Other port configurations, , such as with 1 mm connectors or right angle structure with WR-15 waveguides, are also available under different model numbers.

**Features:**

- Broadband Performance
- High Output Power
- High Gain

Applications:

- IEEE 802.11.ad WiGig
- Radar Systems
- Communication Systems
- Test Equipment


Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	50 GHz		70 GHz
Gain		35 dB	
P _{1dB}		+22 dBm	
P _{sat}		+24 dBm	
P _{in}			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+15 V _{DC}
DC Supply Current		1450 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C


Mechanical Specifications:

Item	Specification
Input Port	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Output Port	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) X 1.80" (L) X 0.75" (H)
Outline	BG-SV-2-A-2

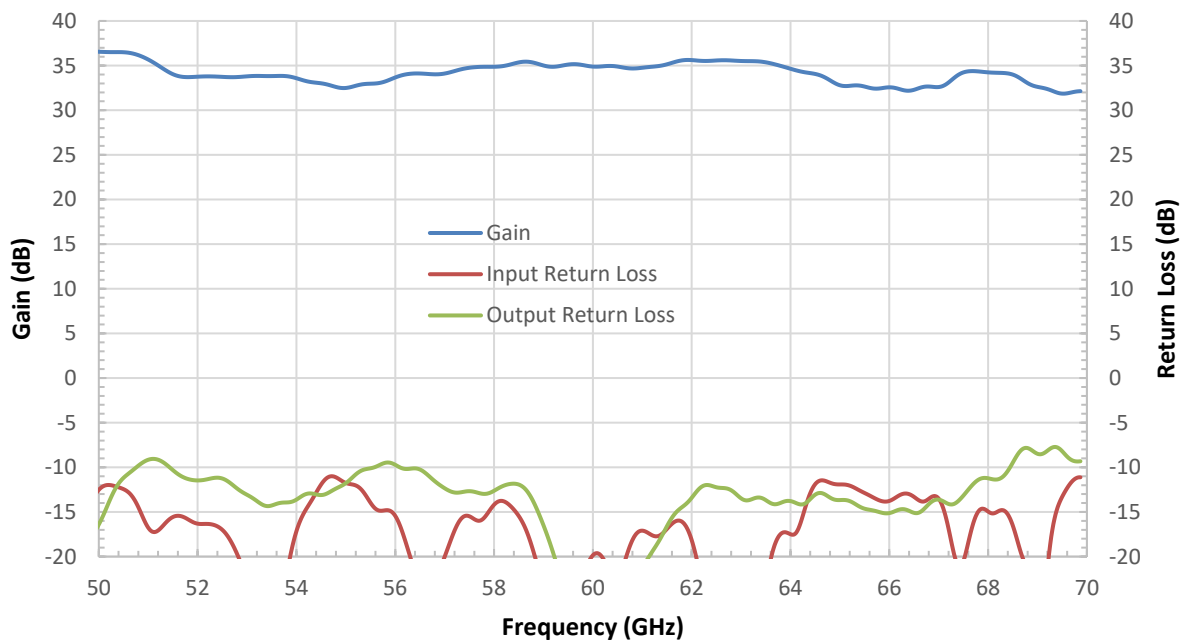


**V-Band Power Amplifier, 50 to 70 GHz, 35 dB Gain, +22 dBm P_{1dB}****Gain and Return Loss vs. Frequency**Bias: +8 V_{DC}/1,466 mA**Output Power vs. Frequency**Bias: +8 V_{DC}/1,466 mA

RFsat: +8Vdc/1,850 mA

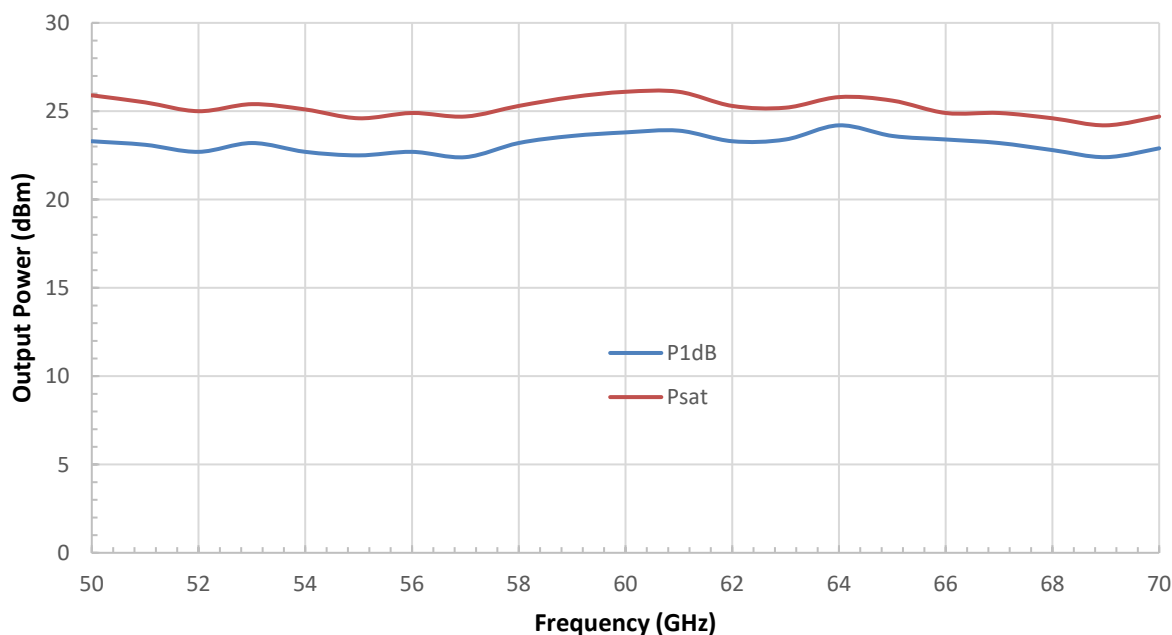

V-Band Power Amplifier, 50 to 70 GHz, 35 dB Gain, +22 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

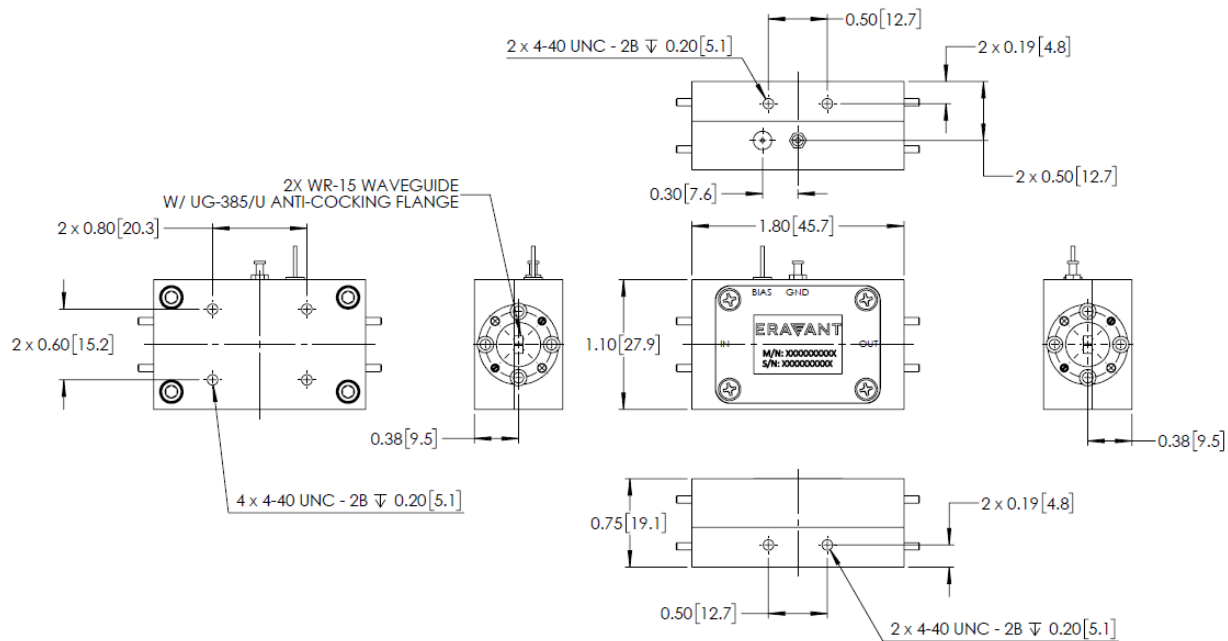

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.