

V-Band Power Amplifier, 50 to 75 GHz, 25 dB Gain, +16 dBm P_{1dB}**Description:**

Model SBP-5037532516-1515-E1 is a V band power amplifier with a typical small signal gain of 25 dB and a nominal P_{1dB} of +16 dBm across the frequency range of 50 to 75 GHz. The DC power requirement for the amplifier is +8 V_{DC}/600 mA. The mechanical configuration offers an in line structure with WR-15 waveguides and UG-385/U anti-cocking flanges. Other port configurations, such as with 1 mm connectors or a right angle structure with WR-15 waveguides, are also available under different model numbers.

**Features:**

- Full Waveguide Band Coverage
- High Output Power
- High Gain

Applications:

- IEEE 802.11ab WiGig
- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|--------------------|--------------------|---------------------|
| Frequency | 50 GHz | | 75 GHz |
| Gain | | 25 dB | |
| P _{1dB} | | +16 dBm | |
| P _{sat} | | +20 dBm | |
| P _{in} | | | +10 dBm |
| Input Return Loss | | 10 dB | |
| Output Return Loss | | 10 dB | |
| DC Voltage | +6 V _{DC} | +8 V _{DC} | +12 V _{DC} |
| DC Supply Current | | 600 mA | |
| Specification Temperature | | +25 °C | |
| Operating Temperature | 0 °C | | +50 °C |


Mechanical Specifications:

| Item | Specification |
|---------------|---|
| Input Port | WR-15 Waveguide with UG-385/U Anti-Cocking Flange |
| Output Port | WR-15 Waveguide with UG-385/U Anti-Cocking Flange |
| Bias | Solder Pin |
| Case Material | Aluminum |
| Finish | Gold Plated |
| Weight | 1.6 Oz |
| Size | 1.10" (W) X 1.50" (L) X 0.75" (H) |
| Outline | BG-SV-2-A |



V-Band Power Amplifier, 50 to 75 GHz, 25 dB Gain, +16 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

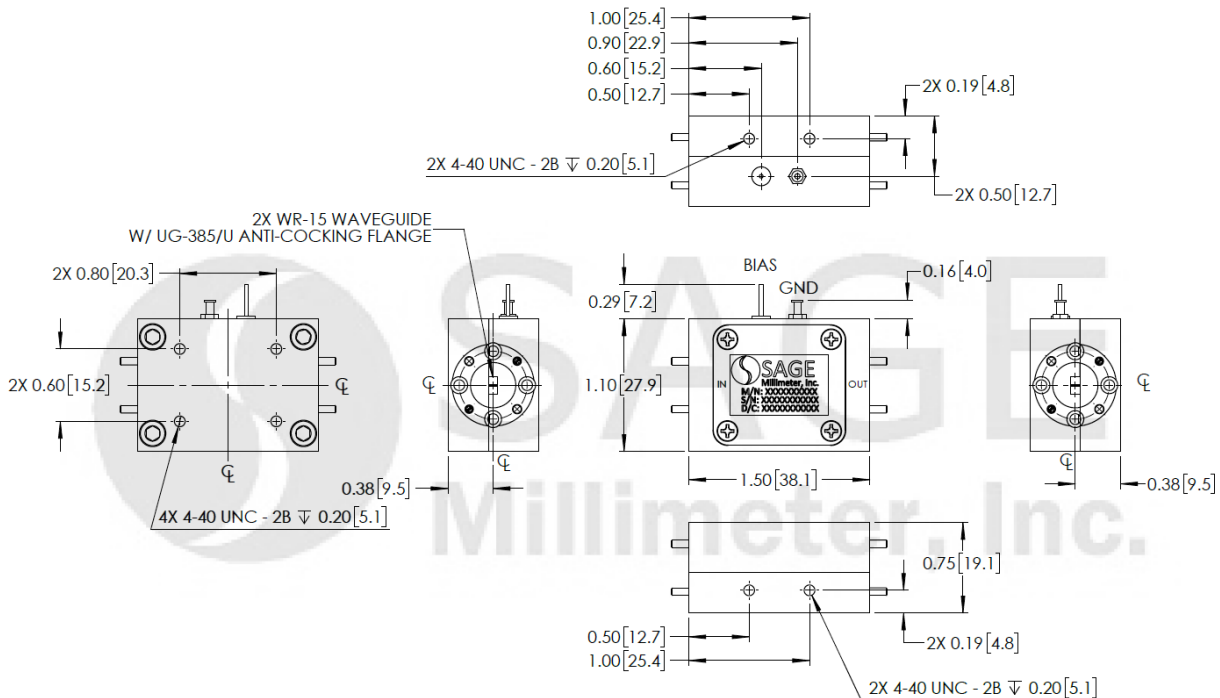

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +60 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

