

SBP-5736433536-1515-EP

V-Band Power Amplifier, 57 to 64 GHz, 35 dB Gain, +36 dBm P_{sat}

SBP-5736433536-1515-EP is a V-Band GaN power amplifier with a typical small signal gain of 35 dB and a nominal P_{sat} of +36 dBm across the frequency range of 57 to 64 GHz. The DC power requirement for the amplifier is +18 V_{DC}/1.7 A. The mechanical configurations is an inline structure with WR-15 waveguides and UG-385/U anti-cocking flanges. Power amplifier module comes with heatsink and fan assembled with the unit.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	57 GHz		64 GHz
Small Signal Gain		35 dB	
Power Gain		30 dB	
P _{sat}		+36 dBm	
P _{in}			+12 dBm
Input Return Loss		7 dB	
Output Return Loss without Damage		5 dB	
DC Supply Voltage (VDD)		+18 V _{DC}	+20 V _{DC}
DC Supply Current		1.7 A	
Supply Voltage to Fan		+12 V _{DC} /0.6 A	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Output	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Power Supply	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Size	3.15" (L) X 2.99" (W) X 3.69" (H)
Outline	BP-HV-H1

ECCN

3A001.b.4

FEATURES

- Class AB GaN Technique
- Broadband Performance
- High Gain
- High Output Power
- Forced Air Cooling
- In-line Port Configuration


APPLICATIONS

- IEEE 802.11ab WiGig
- Radar Systems
- Communication Systems


SUPPLEMENTAL DETAILS




Typical Gain vs. Frequency

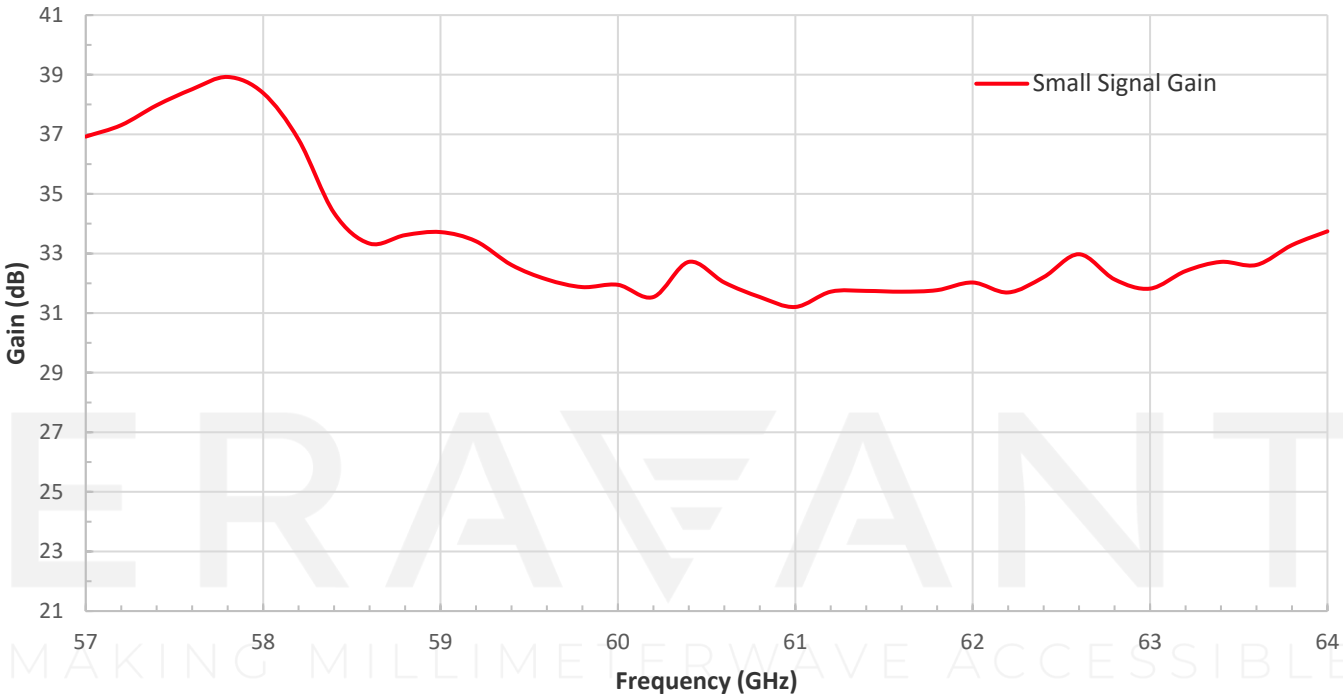


Typical P_{SAT} vs. Frequency

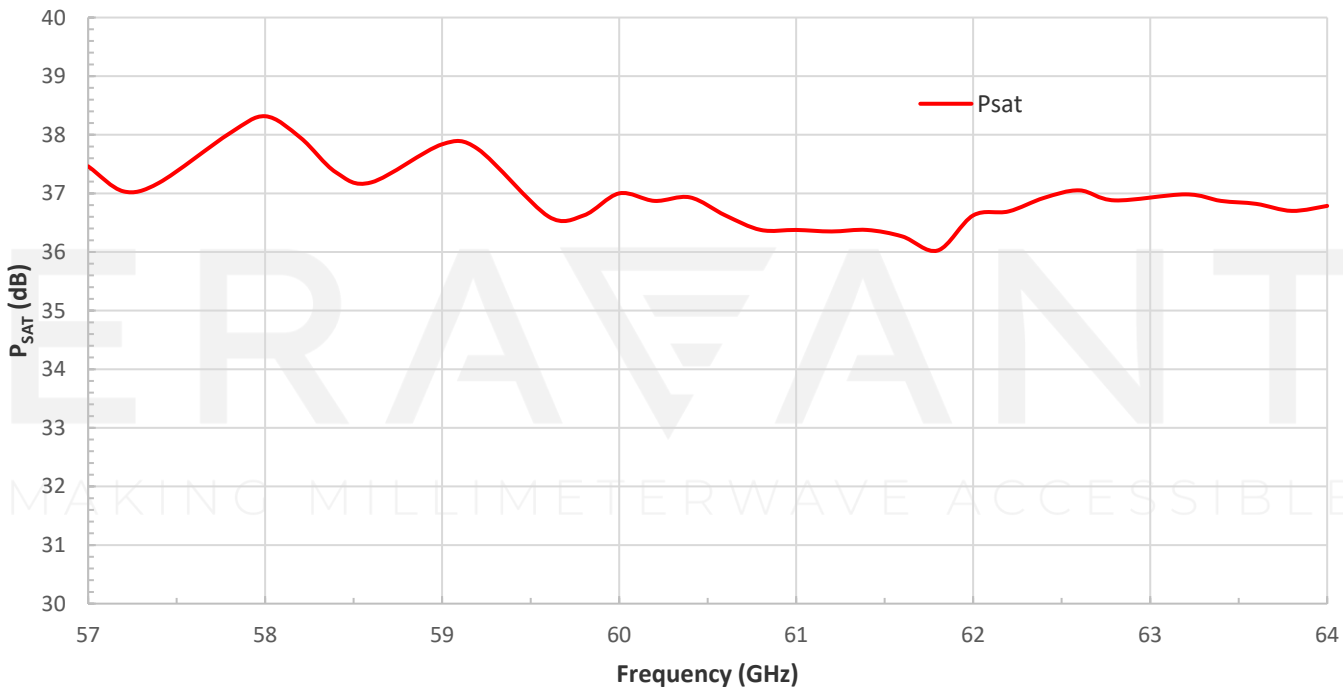

Typical PAE vs. Frequency

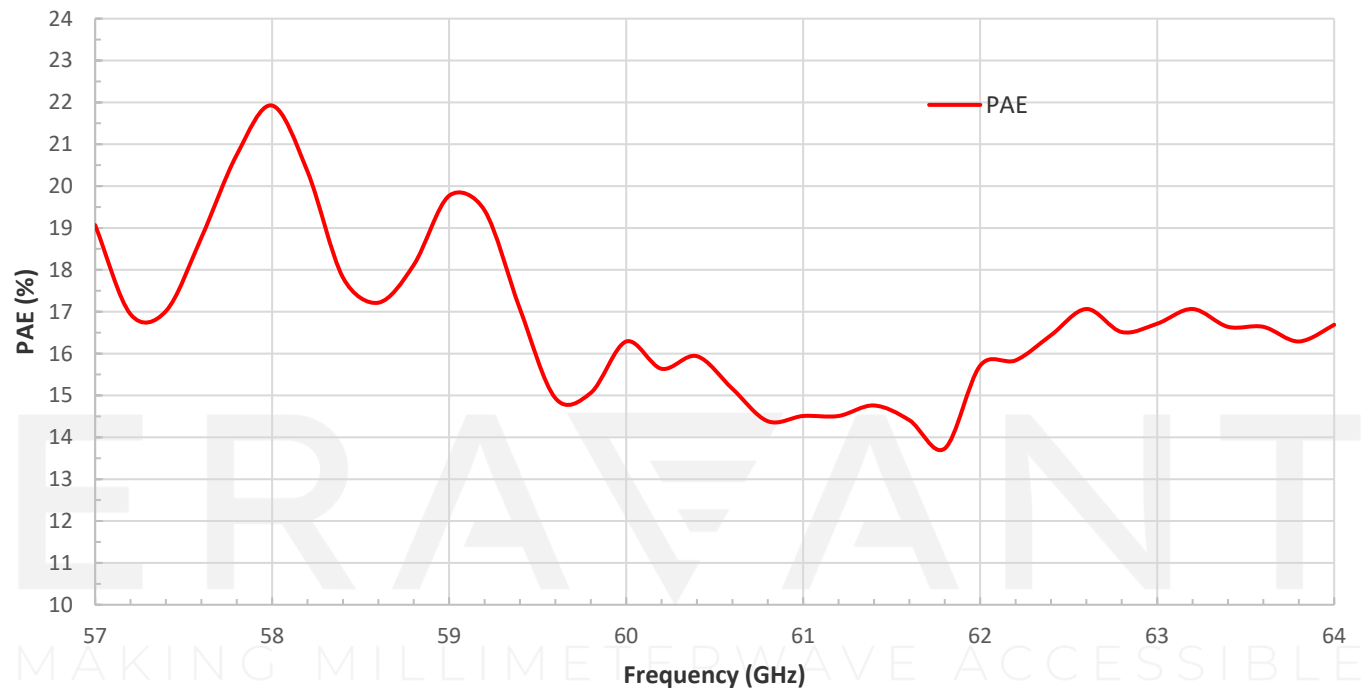


Typical Return Loss vs. Frequency

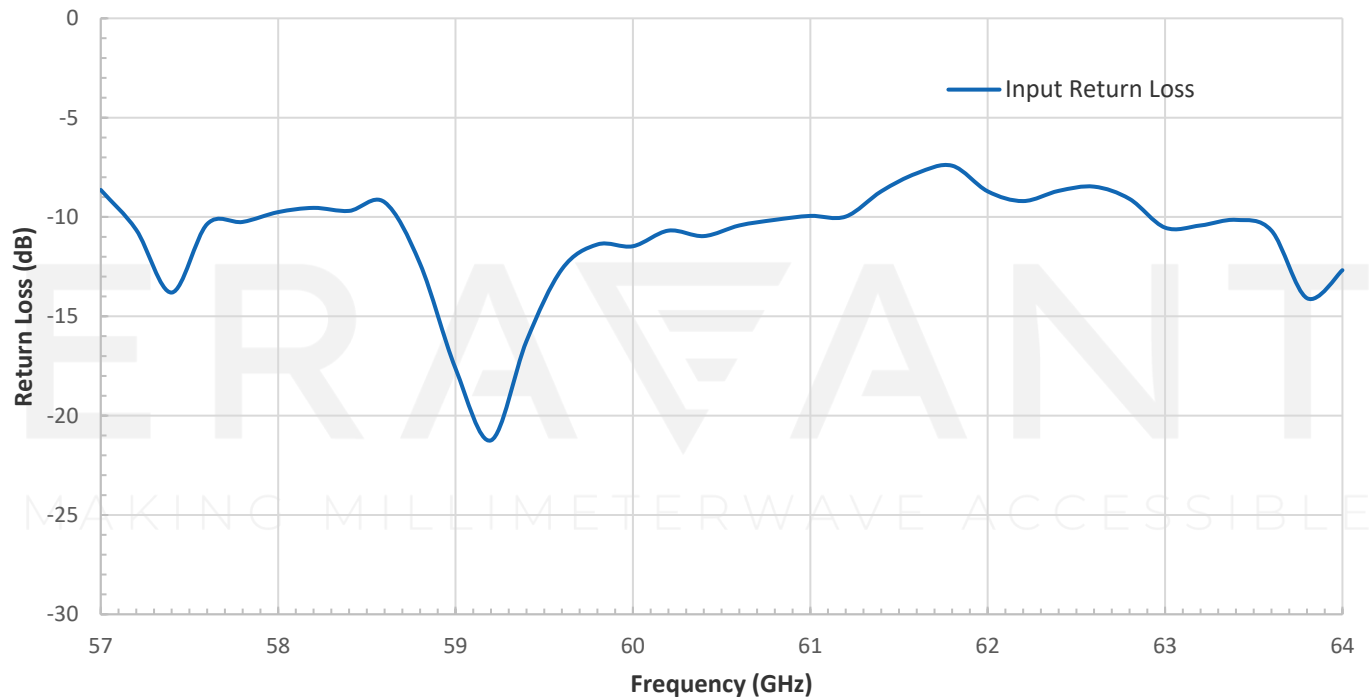

SBP-5736433536-1515-EP

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

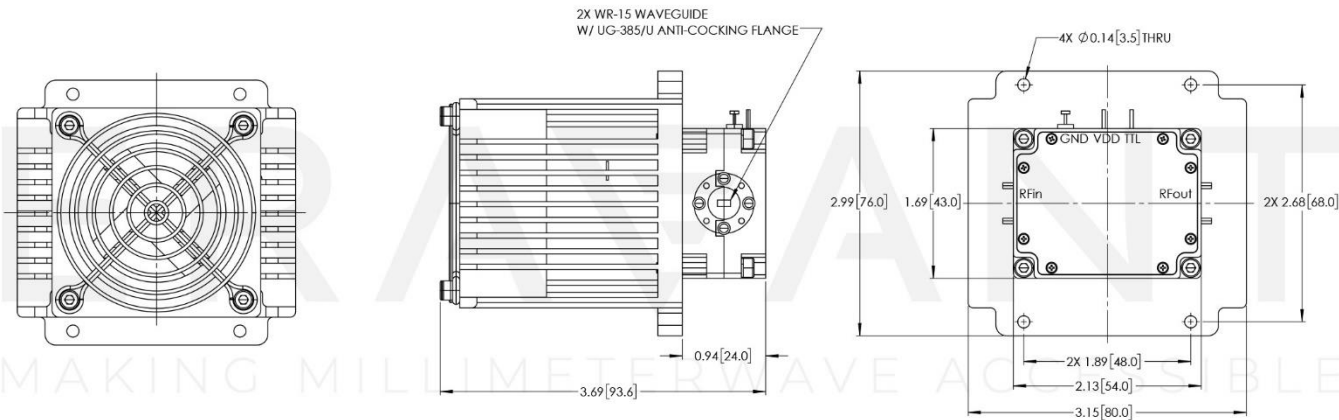

WIRE COLOR	FUNCTIONS
RED	+12V
BLACK	GND
YELLOW	TACH SIGNAL (OPTIONAL)
BLUE	PWM (OPTIONAL)

NOTE:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- Do not block the air inlets and outlets.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Do not plug or unplug any connectors when amplifier is activated. All connectors must be connected/disconnected when amplifier is off.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary
- Any foreign objects in the waveguide will degrade performance and/or damage the device.