

## W-Band Power Amplifier, 65 to 110 GHz, 15 dB Gain, 13 dBm P<sub>1dB</sub>

### Description:

**Model SBP-6531141513-1010-E1-WPC** is a GaN based high power amplifier with a typical small signal gain of 15 dB and a nominal P<sub>1dB</sub> of +13 dBm across the frequency range of 65 to 110 GHz. The DC power requirement for the amplifier is +10 V<sub>DC</sub>/480 mA. The mechanical configuration offers an in line structure with WR-10 waveguides and UG-387/U-M anti-cocking flanges. Other port configurations, such as with 1 mm connectors or a right angle structure with WR-10 waveguides, are also available under different model numbers.



### Features:

- High Output Power
- High Power Added Efficiency (PAE)

### Applications:

- Test Instrumentation
- Communication Systems
- Radar Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	65 GHz		110 GHz
Gain		15 dB	
P <sub>1dB</sub>		+13 dBm	
P <sub>sat</sub>		+18 dBm	
P <sub>in</sub>			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+9 V <sub>DC</sub>	+10 V <sub>DC</sub>	+15 V <sub>DC</sub>
DC Supply Current		480 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

### Mechanical Specifications:

Item	Specification
Input Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Output Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) X 1.50" (L) X 0.75" (H)
Outline	BG-SW-2-A




# SBP-6531141513-1010-E1-WPC

W-Band Power Amplifier, 65 to 110 GHz, 15 dB Gain, 13 dBm P<sub>1dB</sub>


## Gain and Return Loss vs. Frequency

Bias: +10 V<sub>DC</sub>/400 mA

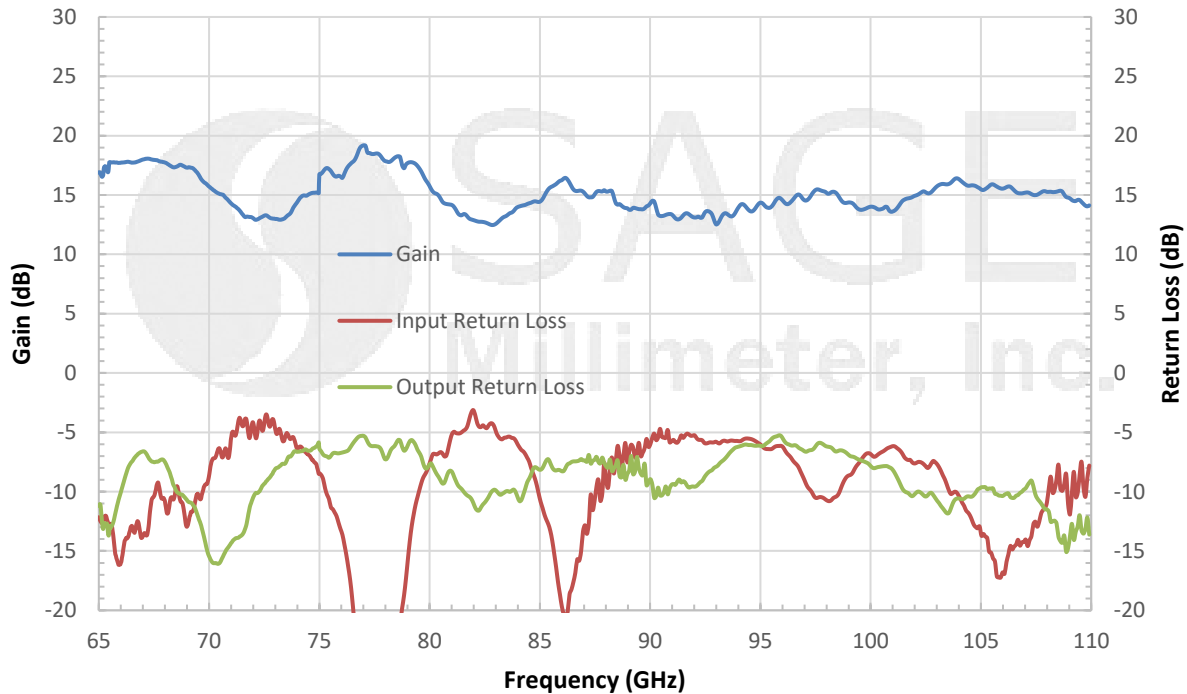

## Output Power vs. Frequency


Bias: +10 V<sub>DC</sub>/400 mA

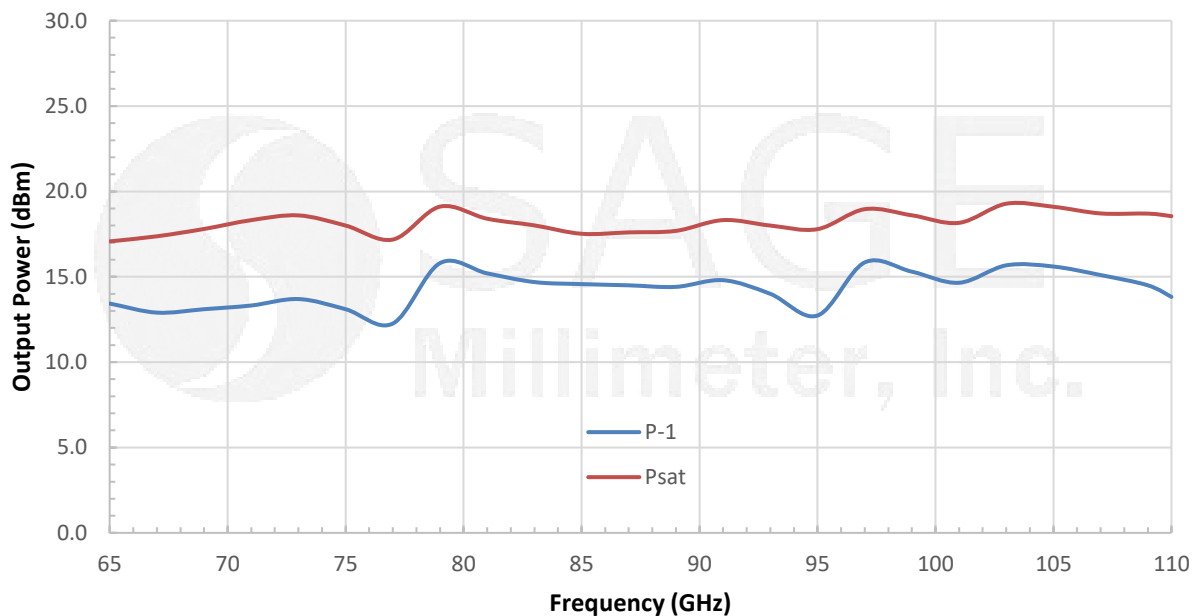

**SBP-6531141513-1010-E1-WPC**

## W-Band Power Amplifier, 65 to 110 GHz, 15 dB Gain, 13 dBm P<sub>1dB</sub>

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

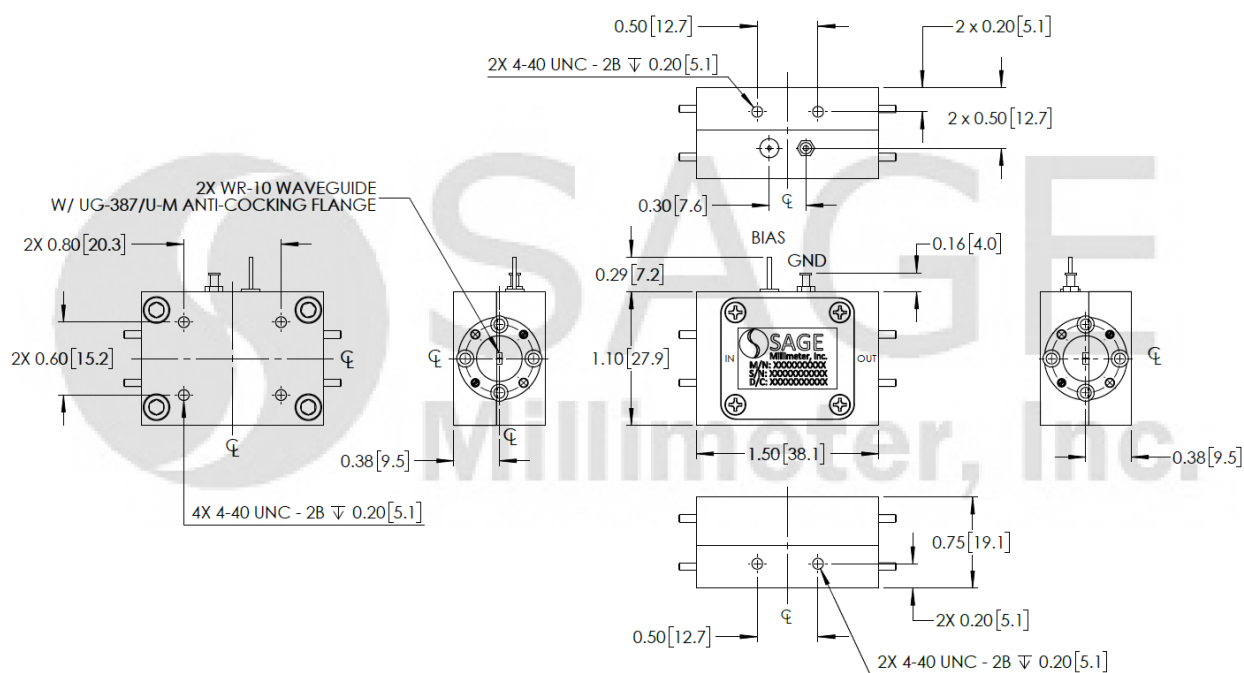

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.