



E-Band Power Amplifier, 67 to 76 GHz, 35 dB Gain, +29 dBm P_{1dB}

Description:

Model SBP-6737633529-1212-E1 is a power amplifier with a typical small signal gain of 35 dB and a typical P_{1dB} of +29 dBm across the frequency range of 67 to 76 GHz. The DC power requirement for the amplifier is +8 V_{DC}/2 A. The mechanical configuration offers an in line structure with WR-12 waveguides and UG-387/U anti-cocking flanges. Other port configurations, such as with 1 mm connectors or a right angle structure with WR-12 waveguides, are also available under different model numbers.



Features:

- High Output Power
- High Gain
- Good Gain Flatness

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	67 GHz		76 GHz
Gain		35 dB	
P _{1dB}		+29 dBm	
P _{sat}		+30 dBm	
P _{in}			+5 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+12 V _{DC}
DC Supply Current		2 A	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
Output Port	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) X 1.50" (L) X 0.75" (H)
Outline	BG-SE-2-A






E-Band Power Amplifier, 67 to 76 GHz, 35 dB Gain, +29 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency

Bias = + 8 V_{DC}/2 A

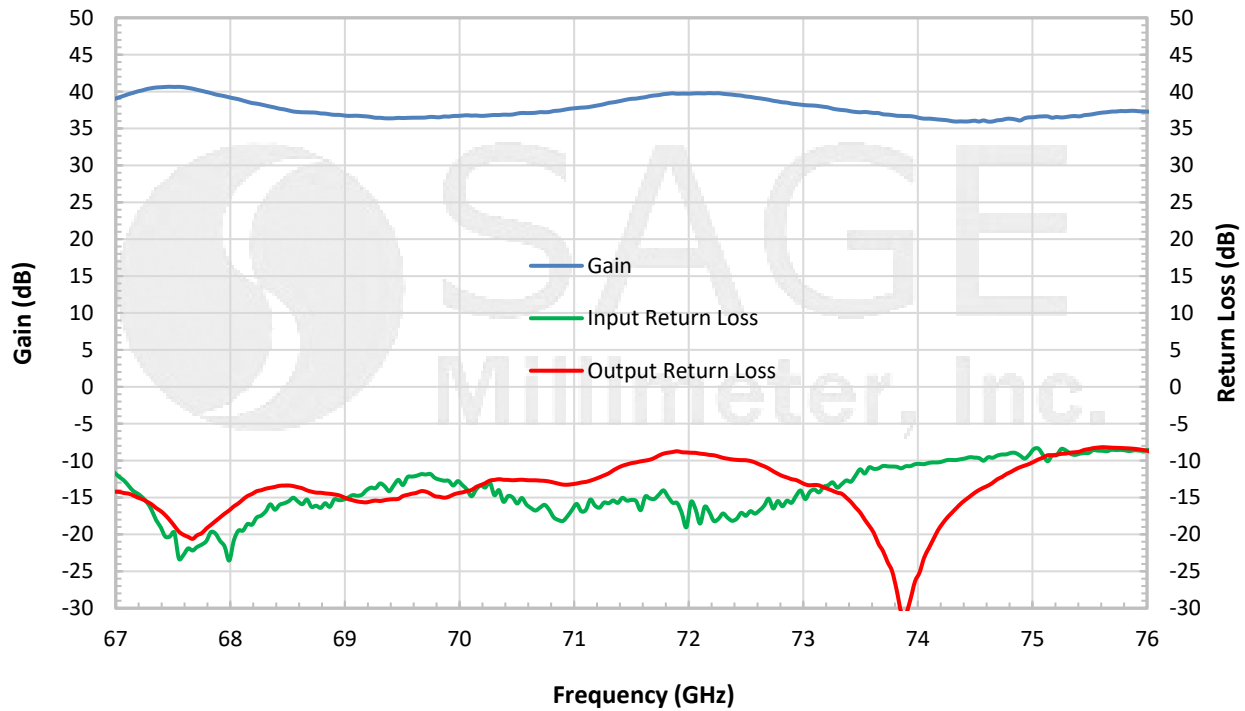

Typical P_{1dB} and P_{sat} vs. Frequency


Bias: +8 V_{DC}/2.4 A

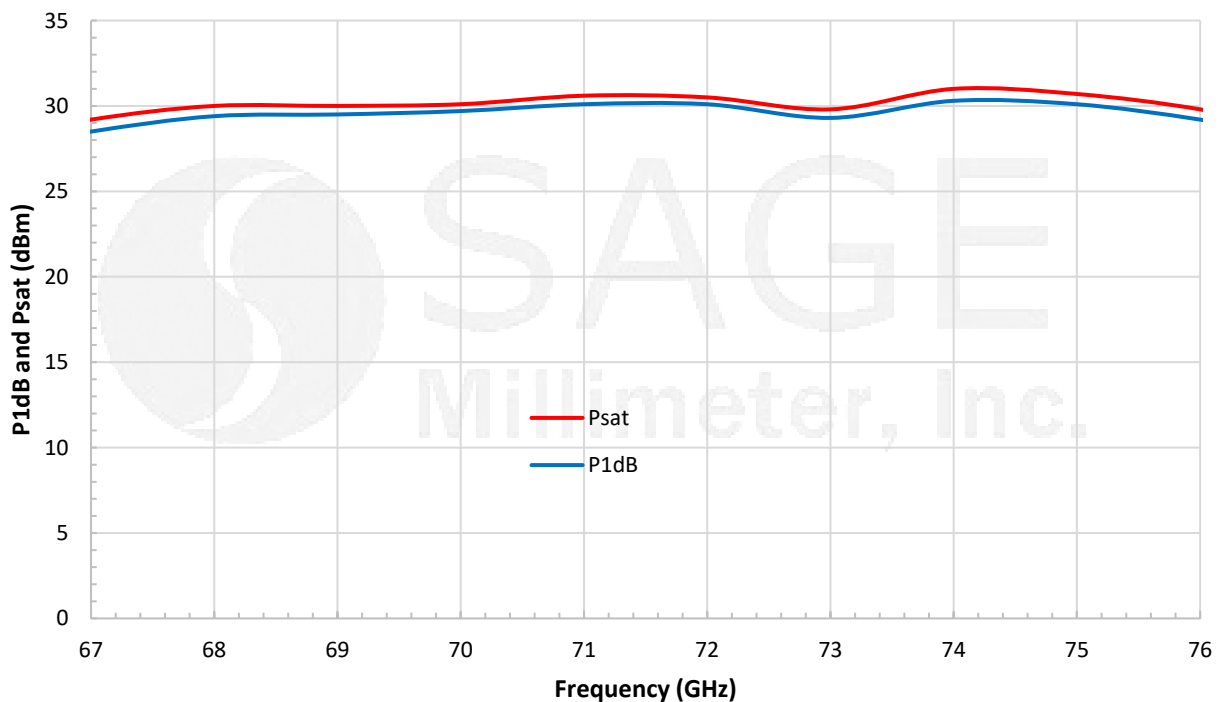



E-Band Power Amplifier, 67 to 76 GHz, 35 dB Gain, +29 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

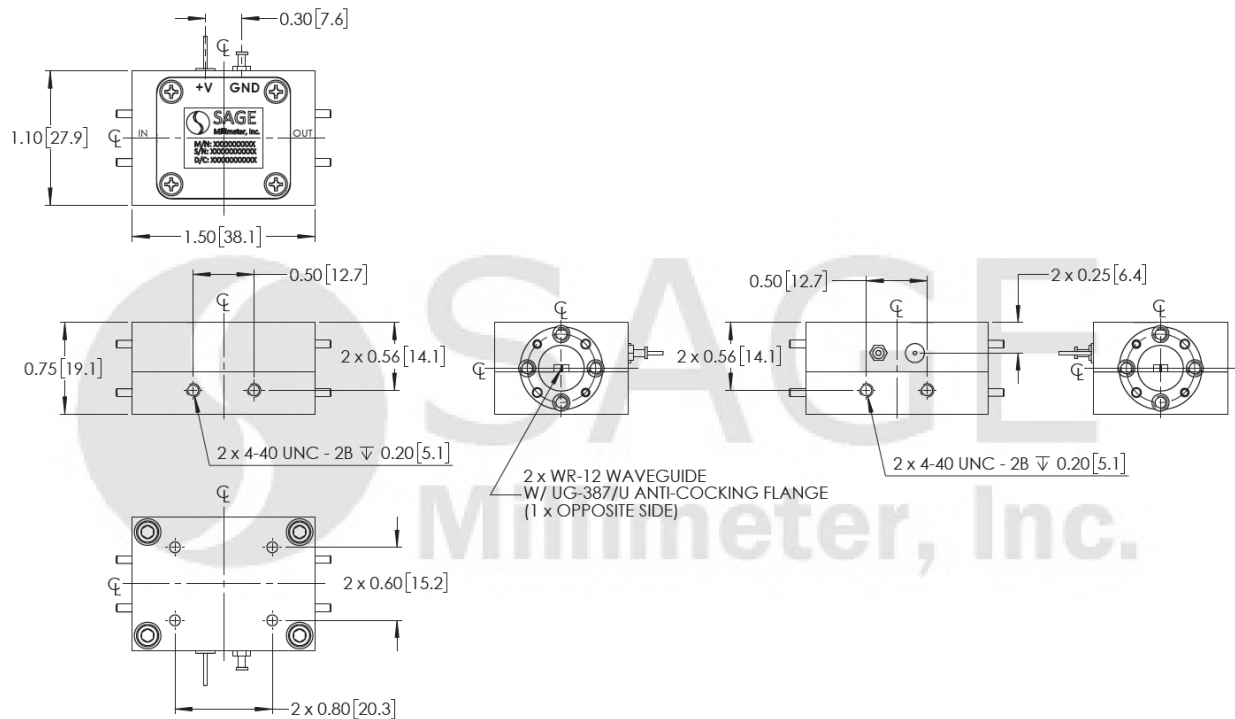

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

