

SFS-03-NB-2

J-Band Subharmonically Pumped Mixer, 220 to 330 GHz

SFS-03-NB-2 is a J-Band subharmonically pumped mixer. The mixer is designed with high performance GaAs Schottky diodes and accepts an LO frequency at half the RF frequency to cover the frequency range from 220 to 330 GHz. With a low LO frequency range of 110 to 165 GHz, this mixer is well suited for low-cost J-band system solutions due to local oscillator frequency requirement. The mixer provides 30 dB 2LO to RF isolation, and 30 dB LO to IF isolation typically. The subharmonically pumped mixers in other frequency bands are offered under various model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	220 GHz		330 GHz
LO Frequency	110 GHz		165 GHz
IF Frequency	DC		30 GHz
LO Pumping Power	+8 dBm		+10 dBm
Conversion Loss (IF: DC-10 GHz)		15 dB	
Conversion Loss (IF: 10-30 GHz)		20 dB	
LO to IF Isolation		30 dB	
2LO to RF Isolation		30 dB	
Combined RF and LO Power			+10 dBm
Specification Temperature		+25°C	
Operating Temperature	+0°C		+50°C

Mechanical Specifications:

Item	Specification
RF Port	WR-03 Waveguide with UG-387/U-M Anti-Cocking Flange
LO Port	WR-06 Waveguide with UG-387/U Anti-Cocking Flange
IF Port	2.92 mm (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Size	0.75" (W) x 0.75" (L) x 0.75" (H)
Outline	FS-D03-A

ECCN

EAR99

FEATURES

- Low LO Power Requirement
- Subharmonic Mixing
- Compact Package

APPLICATIONS


- THz
- Test Equipment

SUPPLEMENTAL DETAILS




Conversion Loss vs. Frequency

RF: -20 dBm; LO: +10 dBm

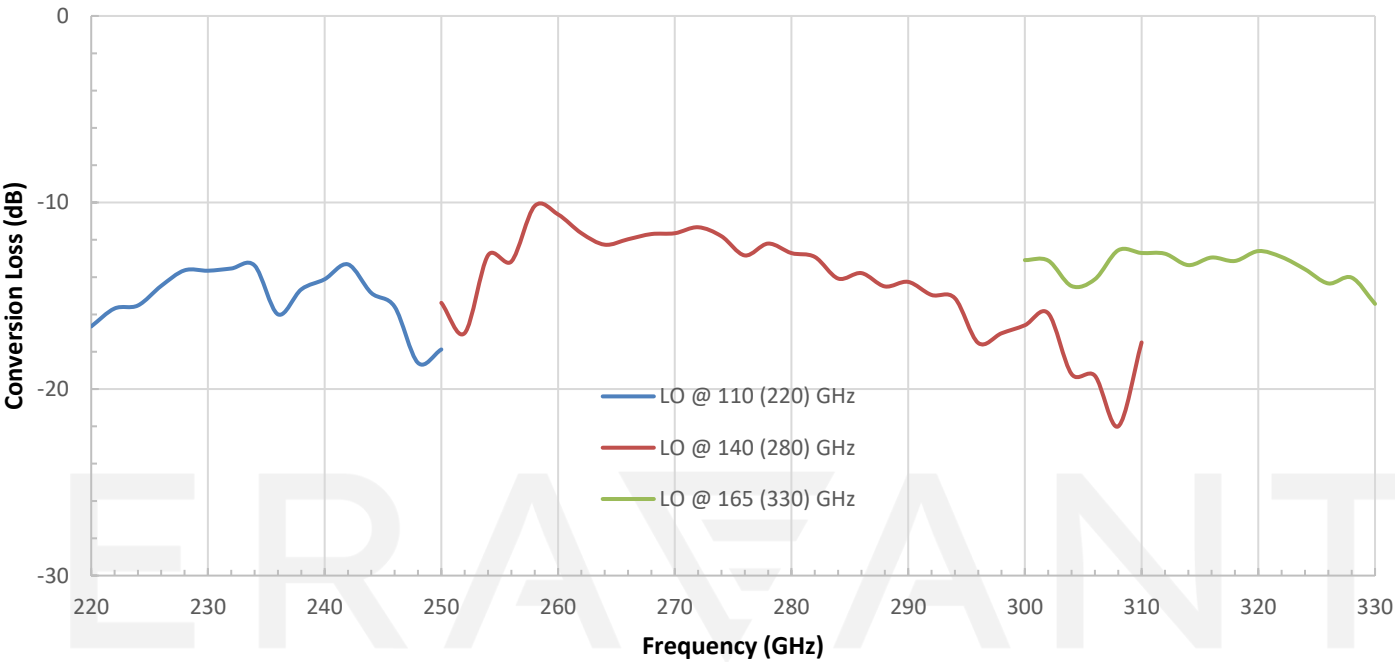


2LO to RF Isolation vs. Frequency

LO: +10 dBm

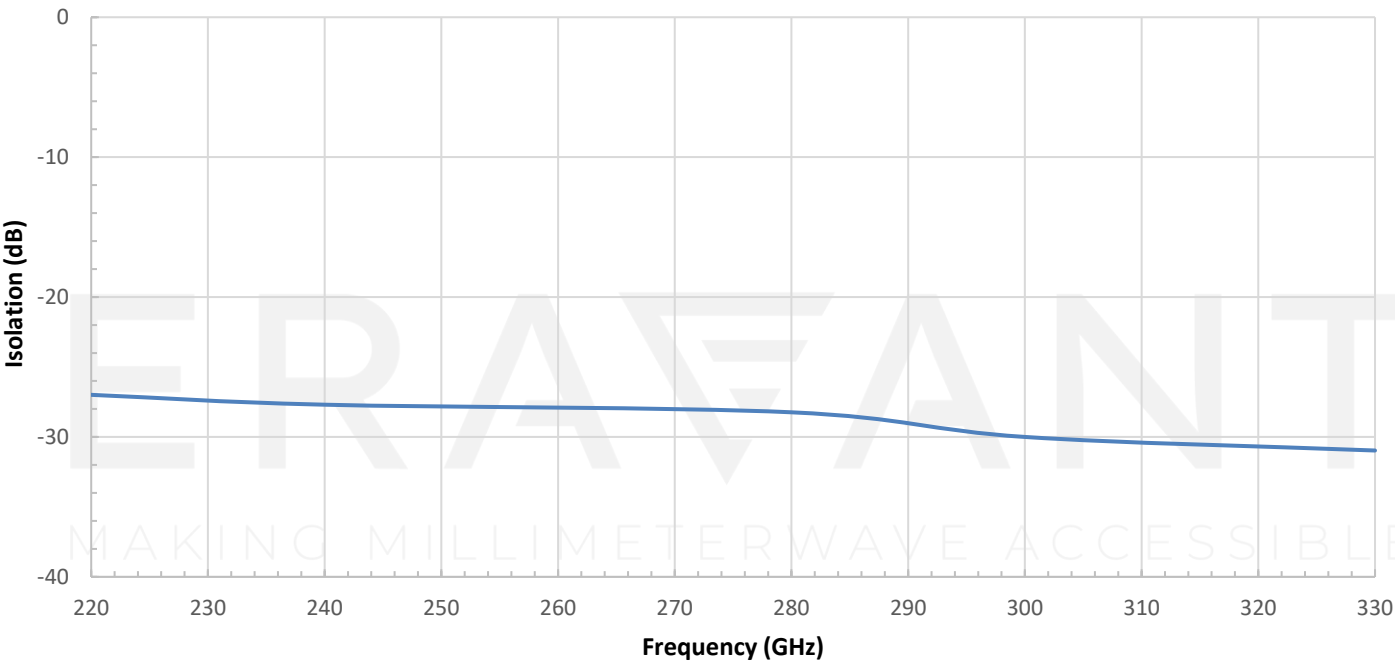

SFS-03-NB-2

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

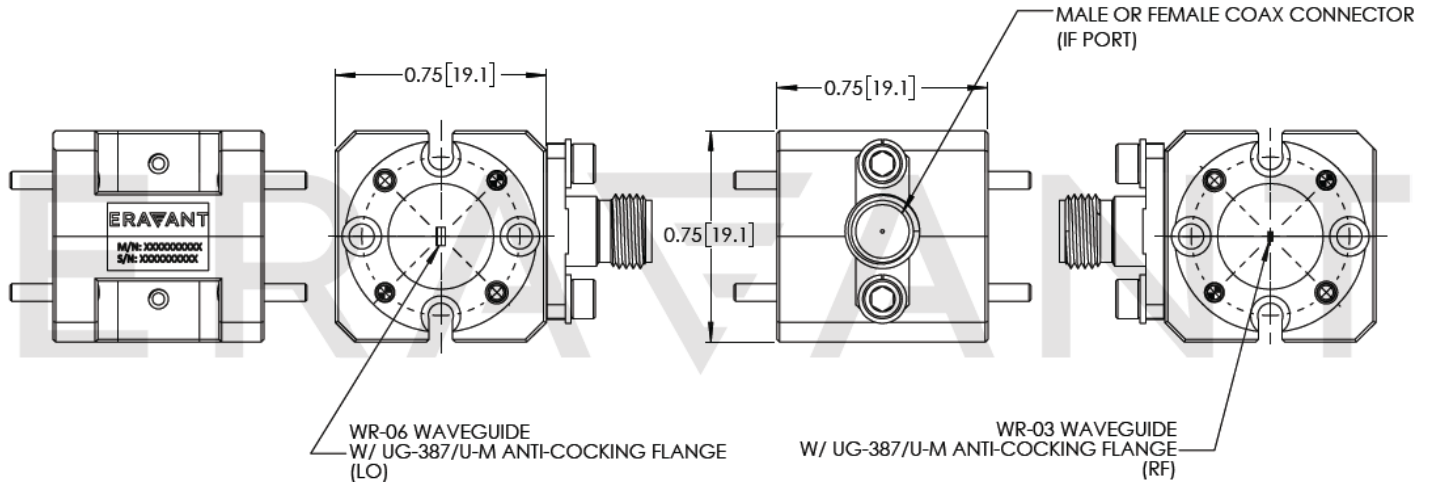

NOTE:

- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The IF port of the mixer is DC coupled. Use a DC block when connecting to other devices. **Any external bias voltage applied to the IF port will damage the mixer. Eravant model, SCB-050-KFKM-U2, is highly recommended.**
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.