



## V-Band Power Amplifier, 71 to 76 GHz, 40 dB Gain, +27 dBm P<sub>1dB</sub>

### Description:

**Model SBP-7137634027-1515-E1** is a power amplifier with a typical small signal gain of 40 dB, a nominal P<sub>1dB</sub> of +27 dBm and a P<sub>sat</sub> of +30 dBm across the frequency range of 71 to 76 GHz. The DC power requirement for the amplifier is +8 V<sub>DC</sub>/2,900 mA. The mechanical configuration offers an in line structure with WR-15 waveguides and UG-385/U anti-cocking flanges. Other port configurations, such as with 1 mm connectors or right angle structure with WR-15 waveguides, are also available under different model numbers.



### Features:

- High Output Power
- Moderate Gain

### Applications:

- Radar Systems
- Test Equipment

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	71 GHz		76 GHz
Gain		40 dB	
P <sub>1dB</sub>		+27 dBm	
P <sub>sat</sub>		+30 dBm	
P <sub>in</sub>			+5 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V <sub>DC</sub>	+15 V <sub>DC</sub>
DC Supply Current		2,900 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

### Mechanical Specifications:

Item	Specification
Input	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Output	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) X 1.50" (L) X 0.75" (H)
Outline	BG-SV-2-A






## V-Band Power Amplifier, 71 to 76 GHz, 40 dB Gain, +27 dBm P<sub>1dB</sub>

### Typical Gain and Return Loss vs. Frequency


Bias: +8 V<sub>DC</sub>/2,848 mA

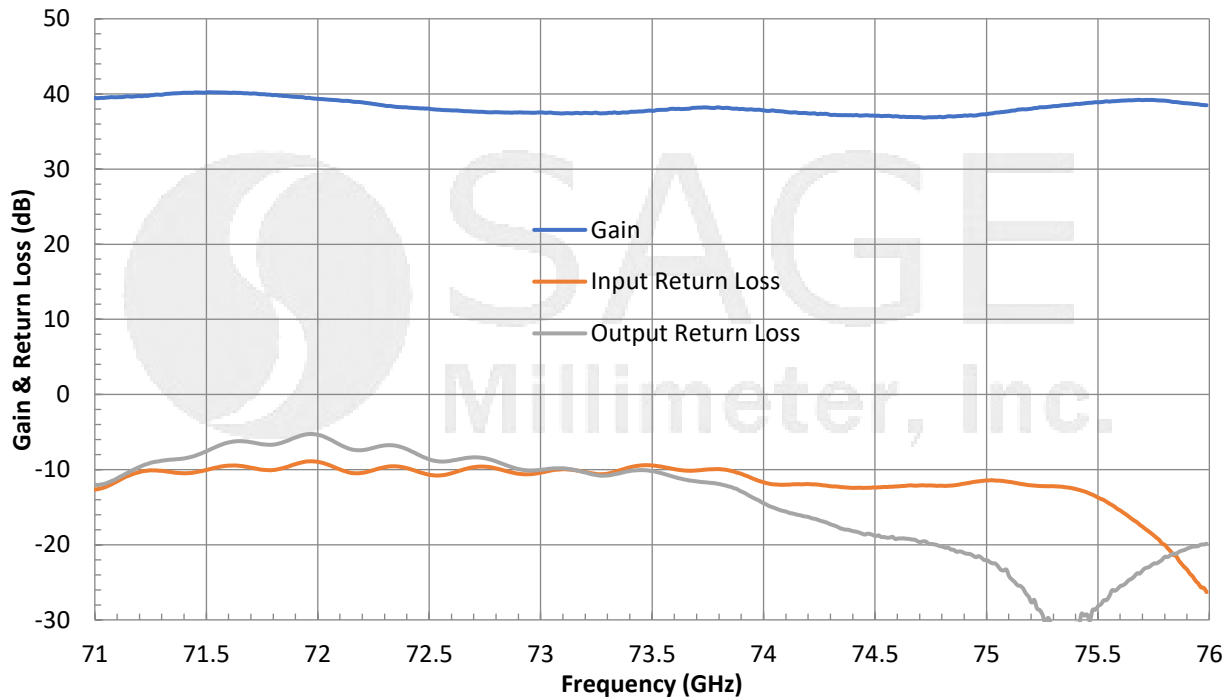

### Typical Output Power vs. Frequency

Bias: +8 V<sub>DC</sub>/2,848 mA


RFsat: +8V<sub>DC</sub>/3,950mA

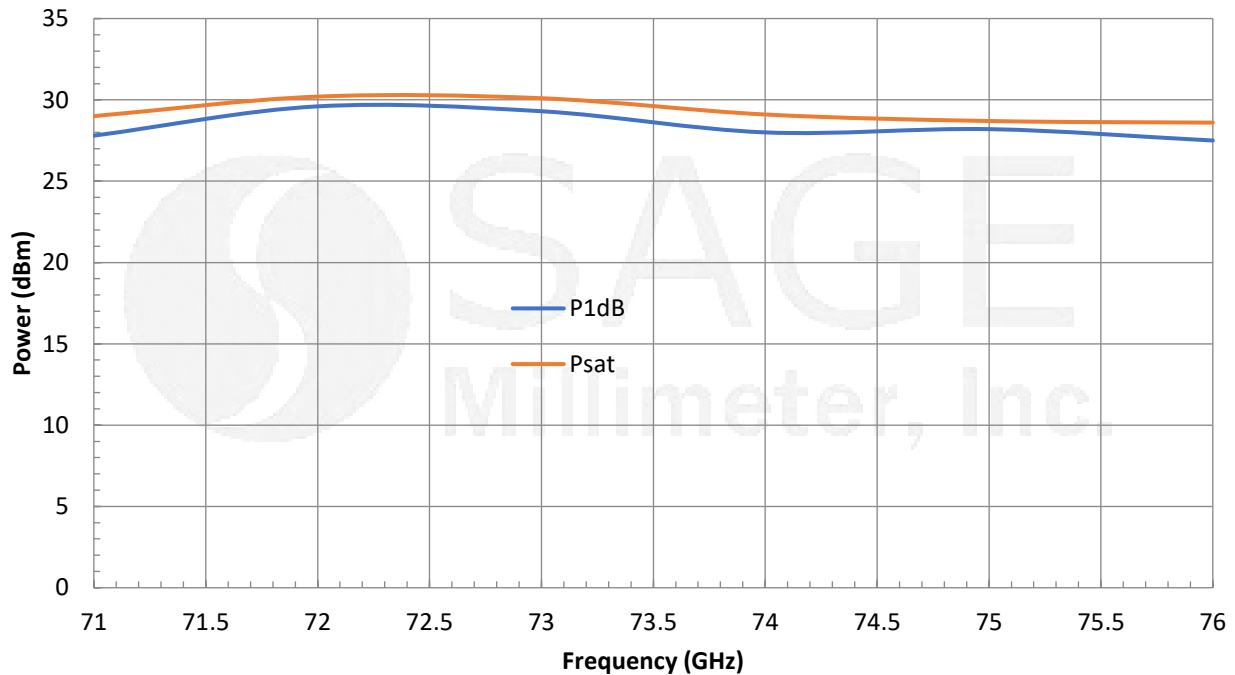



## V-Band Power Amplifier, 71 to 76 GHz, 40 dB Gain, +27 dBm P<sub>1dB</sub>

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

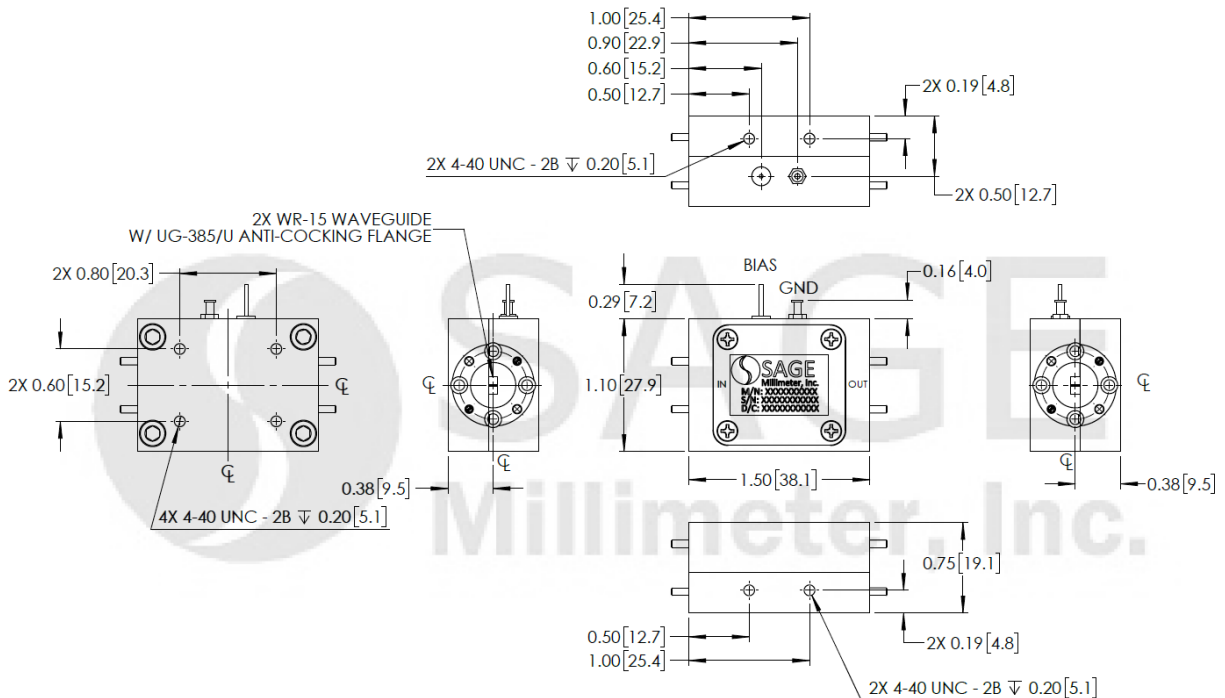

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.

