



W-Band Power Amplifier, 75 to 110 GHz, 25 dB Gain, +15 dBm P_{1dB}

Description:

Model **SBP-7531142515-1F10-E1-WC** is a W band power amplifier with a typical small signal gain of 25 dB and a nominal output power of +15 dBm across the frequency range of 75 to 110 GHz. The DC power requirement for the amplifier is +15 V_{DC}/350 mA. The input port configuration is a female 1 mm connector and the output is a WR-10 waveguides and UG387/U-M flanges. Other port configurations are available under different model numbers.



Features:

- Full Waveguide Band Coverage
- High Gain
- Moderate Output Power

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	75 GHz		110 GHz
Gain		25 dB	
P _{1dB}		+15 dBm	
P _{sat}		+20 dBm	
P _{in}			+15 dBm
Input Return Loss		10 dB	
Output Return Loss		8 dB	
DC Voltage	+13 V _{DC}	+15 V _{DC}	+16 V _{DC}
DC Supply Current		350 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	1 mm (F) Connector
Output Port	WR-10 Waveguide with UG-387/U-M Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.9 Oz
Size	1.89" (L) X 1.10" (W) X 0.75" (H)
Outline	BG-SW-2CW-WC






W-Band Power Amplifier, 75 to 110 GHz, 25 dB Gain, +15 dBm P_{1dB}

Test Data:

Gain and Return Loss vs. Frequency


Bias: +15 V_{DC}/348 mA

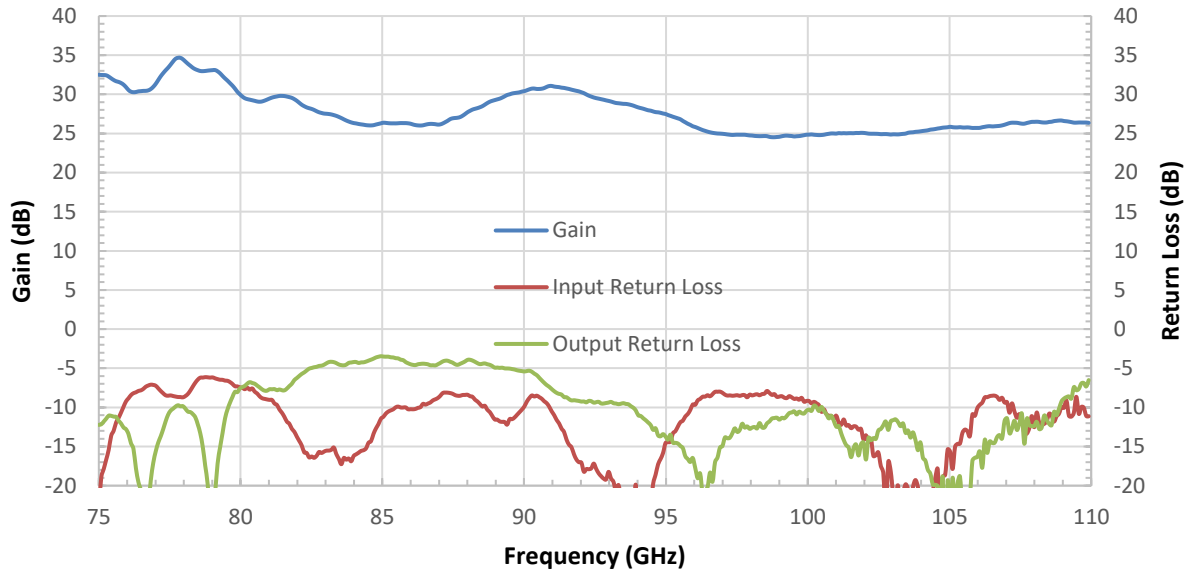

Output Power vs. Frequency


Bias: +15 V_{DC}/348 mA

RFsat: +15 Vdc/ 480 mA

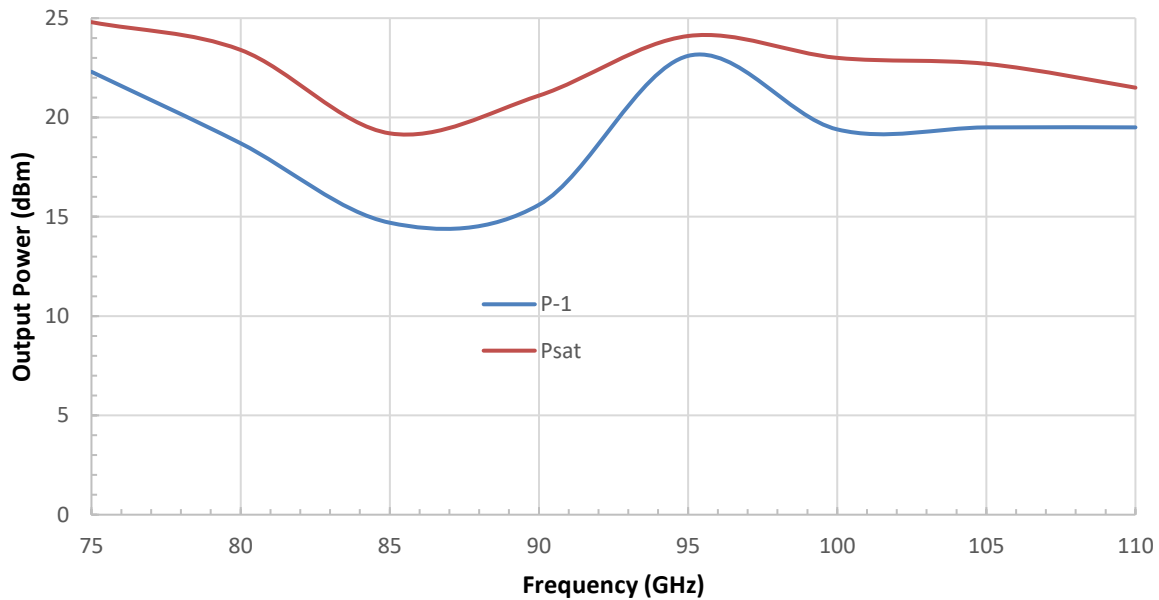

W-Band Power Amplifier, 75 to 110 GHz, 25 dB Gain, +15 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

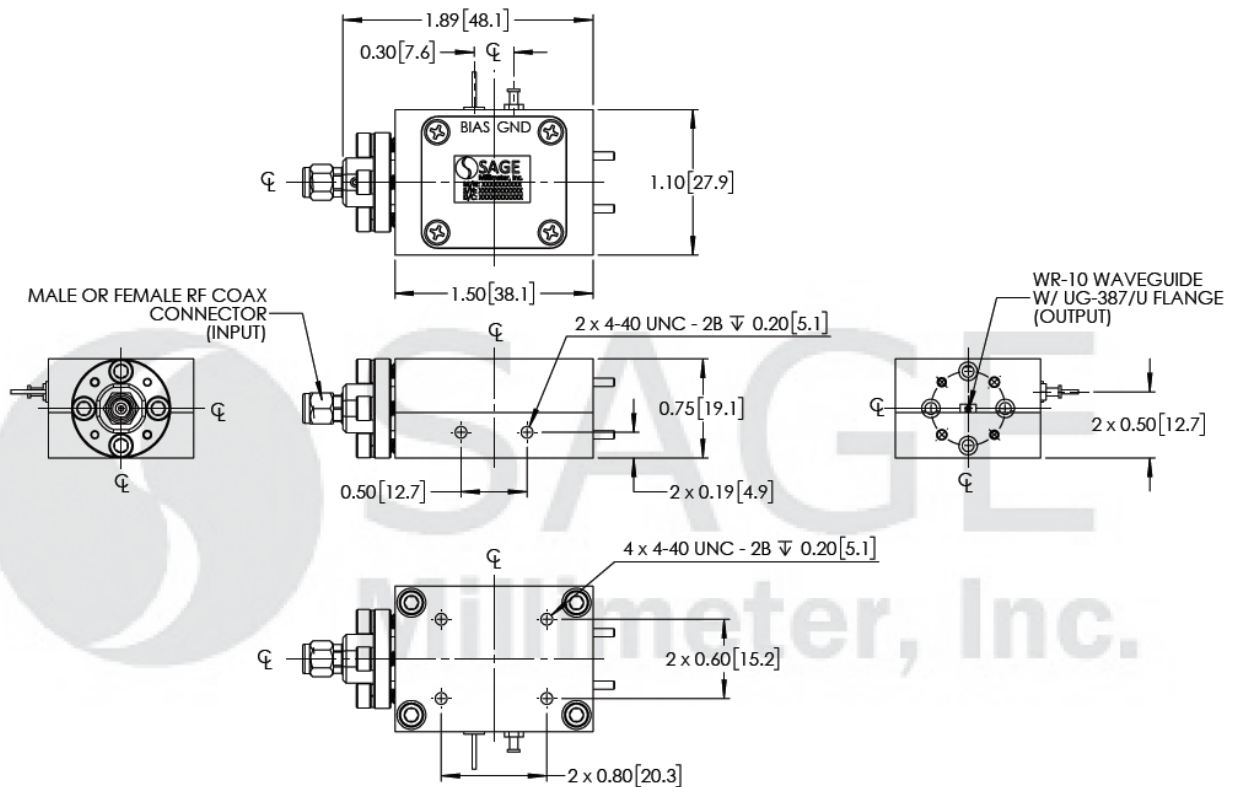

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.4 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

