



SP4T PIN Switch with TTL Driver, 18 to 40 GHz, Absorptive

Description:

Model SK4-1834035060-KFKF-A3 is an absorptive PIN diode based, single pole, four throw (SP4T) switch with a TTL driver that operates between 18 and 40 GHz. This model offers a typical insertion loss of 5 dB and 60 dB port-to-port isolation with a typical switching speed of 100 nanoseconds. The switch has female K connectors for all RF ports and solder pins for DC bias and TTL control.



Features:

- Ultrabroad Bandwidth
- High Isolation
- Compact Size
- Fast Control Speed

Applications:

- 5G Systems
- Radar Systems
- Communication Systems
- Automatic Test Equipment
- Switching Network

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	18 GHz		40 GHz
Insertion Loss		5.0 dB	
Return Loss		10 dB	
Isolation		60 dB	
Operational RF Input Power			+20 dBm
Damage RF Input Power			+27 dBm
Bias Voltage		$\pm 5 V_{DC}$	
Bias Current		100/50 mA	
Control		TTL	
Switching Speed		100 ns	
Specification Temperature		+25 °C	
Operation Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
Input Port	K(F)
Output Port	K(F)
Bias	Solder Pins
Logic Input	Solder Pins
Case Material	Brass
Finish	Gold Plated
Weight	1.8 Oz
Outline	K4-AC-Z1






SP4T PIN Switch with TTL Driver, 18 to 40 GHz, Absorptive

Typical Performance vs. Frequency

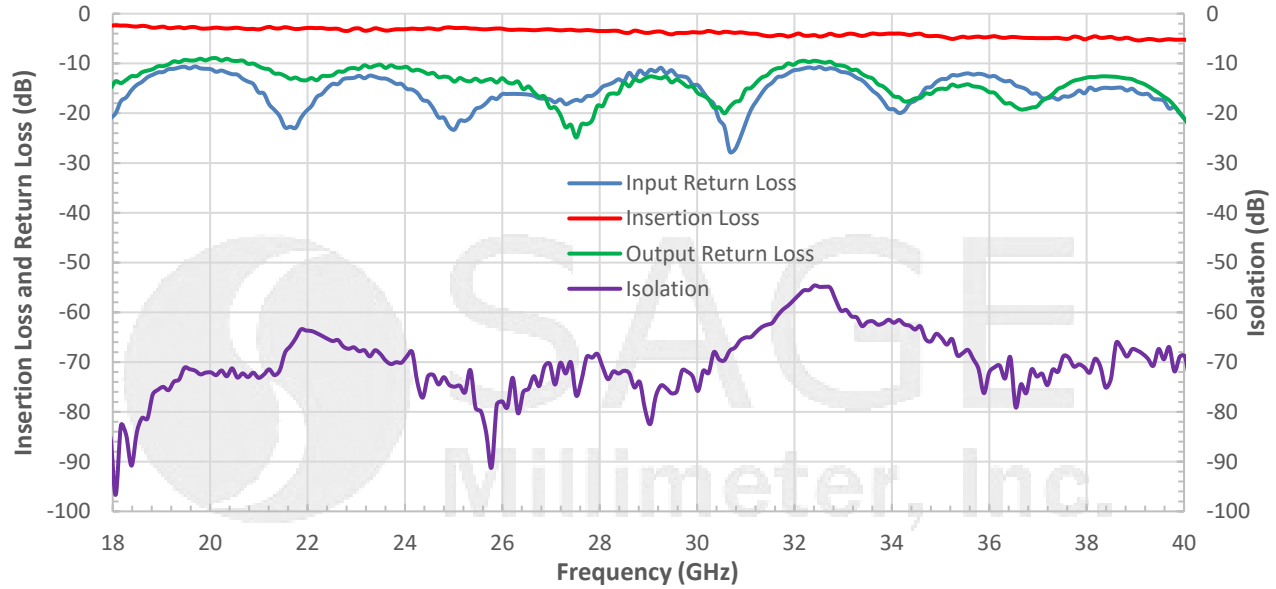

Note: The insertion loss, isolation and return loss between other ports are similar to the above plot.

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

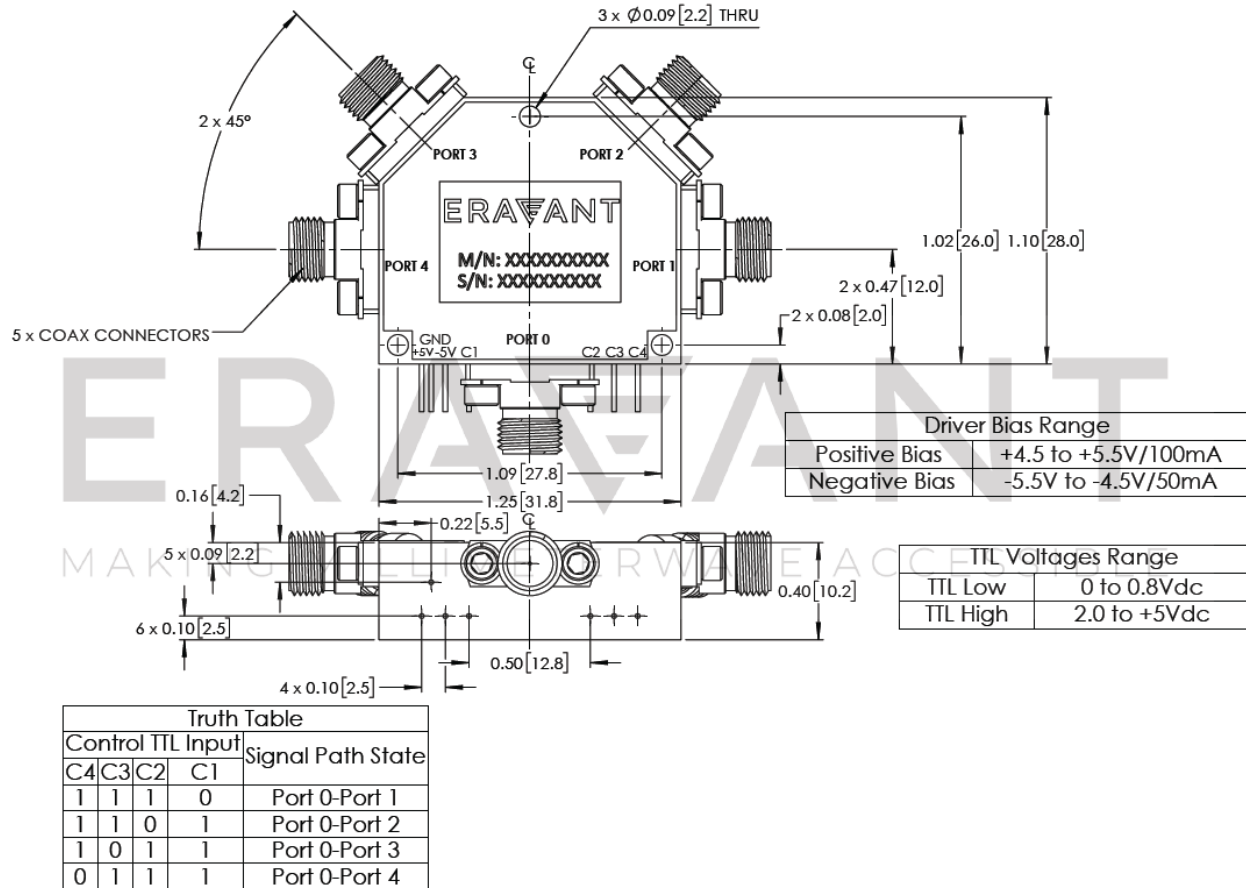

SP4T PIN Switch with TTL Driver, 18 to 40 GHz, Absorptive

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the switch will damage the device.
- The switch is a static sensitive device. Always follow ESD rules when working with the switches.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **Torque wrench, model SCH-08008-S1, is highly recommended.**

