

SBP-8839834833-1010-EP

W-Band Power Amplifier, 88 to 98 GHz, 48 dB Gain, +33 dBm P_{sat}

SBP-8839834833-1010-EP is a W-band GaN power amplifier with a typical small signal gain of 48 dB and a nominal P_{sat} of +33 dBm across the frequency range of 88 to 98 GHz. The DC power requirement for the amplifier is +18 V_{DC}/1 A. The mechanical configurations is an inline structure with WR-10 waveguides and UG-387/U-M anti-cocking flanges. Power amplifier module comes with heatsink and fan assembled with the unit.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	88 GHz		98 GHz
Small Signal Gain		48 dB	
Power Gain		33 dB	
P _{sat}		+33 dBm	
P _{in}			+10 dBm
Input Return Loss		8 dB	
Output Return Loss without Damage		5 dB	
DC Supply Voltage (VDD)	+16 V _{DC}	+18 V _{DC}	+20 V _{DC}
DC Supply Current		1 A	
Supply Voltage to Fan		+12 V _{DC} /0.6 A	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input	WR-10 Waveguide with UG-387/U-M Anti-Coking Flange
Output	WR-10 Waveguide with UG-387/U-M Anti-Coking Flange
Power Supply	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Size	3.15" (L) X 2.99" (W) X 3.69" (H)
Outline	BP-HW-H1

ECCN

3A001.b.4

FEATURES

- Class AB GaN Technique
- Broadband Performance
- High Gain
- High Output Power
- Forced Air Cooling
- In-line Port Configuration


APPLICATIONS

- Radar Systems
- Communication Systems
- Test Equipment

SUPPLEMENTAL DETAILS




Typical Gain vs. Frequency

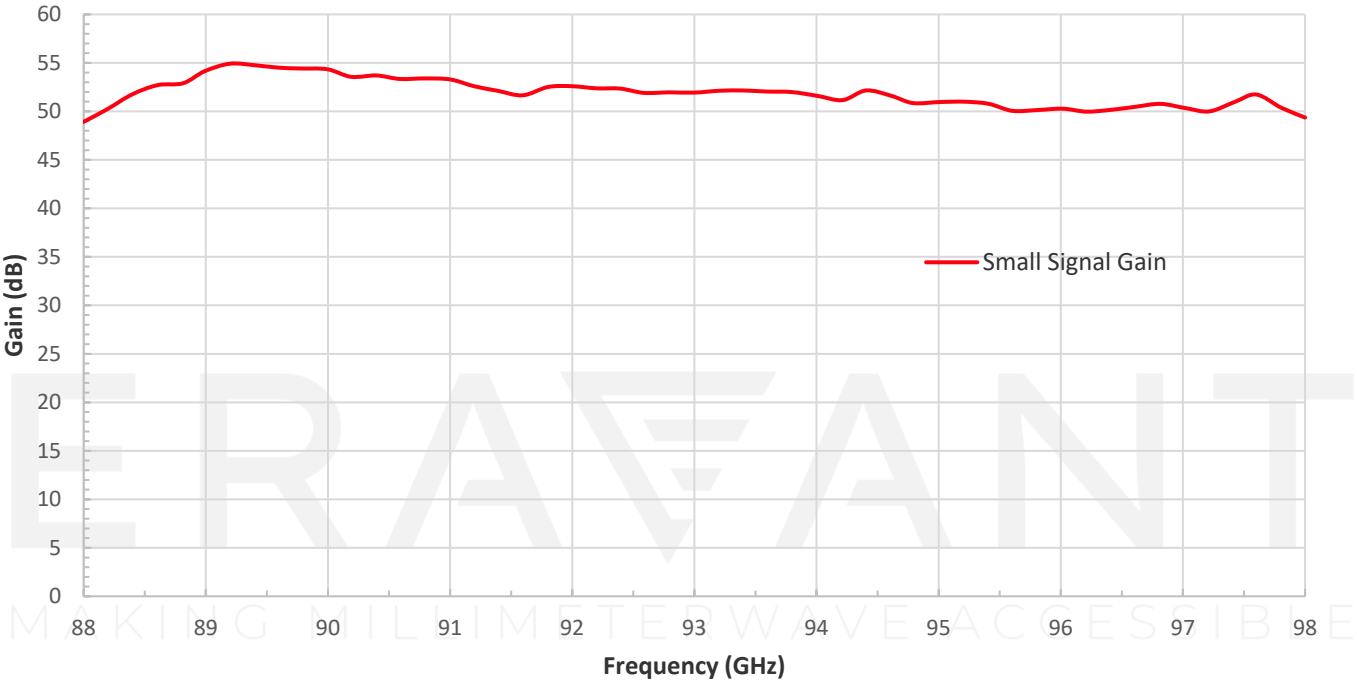


Typical P_{SAT} vs. Frequency

Bias: +18 V_{DC}/ 900 mA

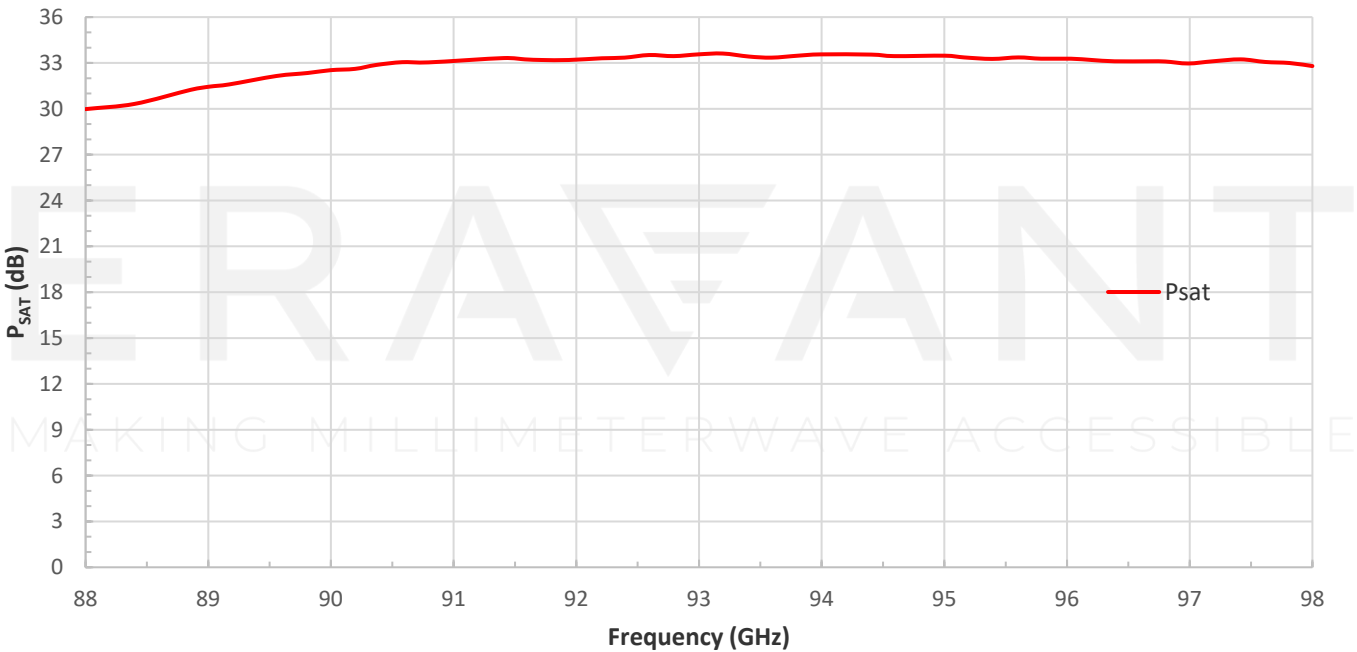


Typical PAE vs. Frequency

Bias: +18 V_{DC}/ 900 mA

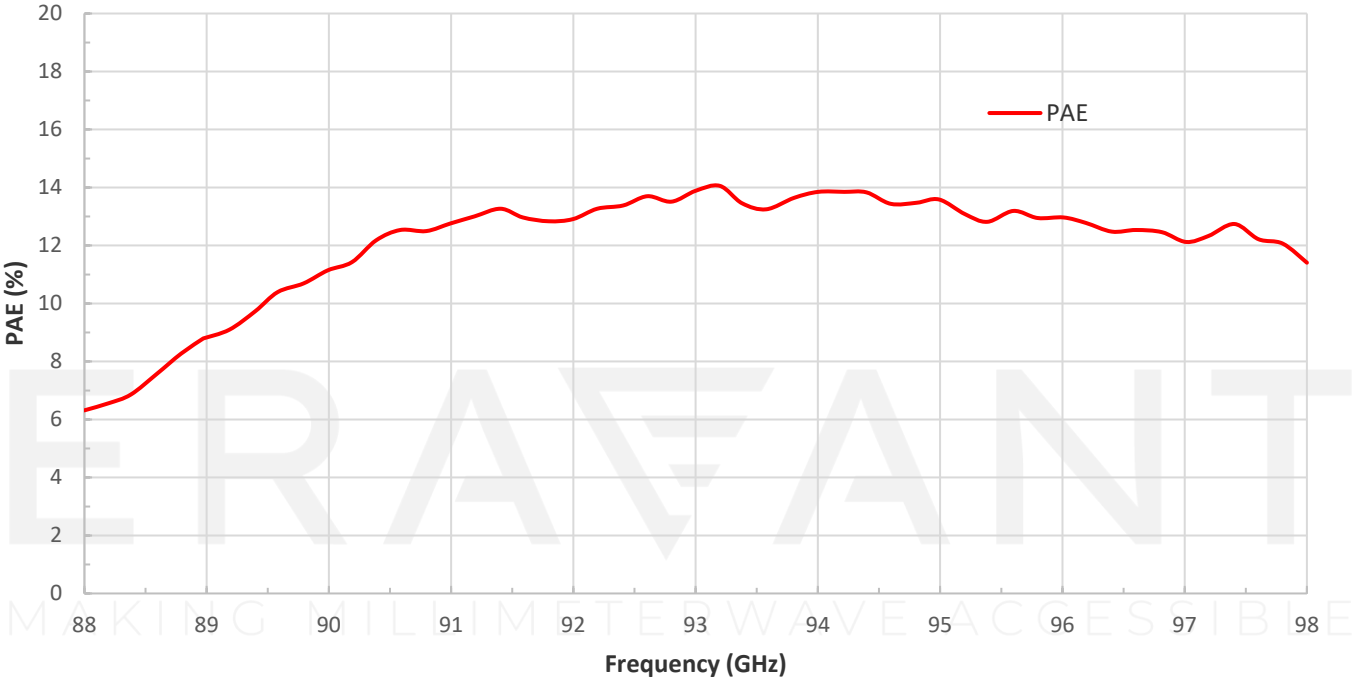


Typical Return Loss vs. Frequency

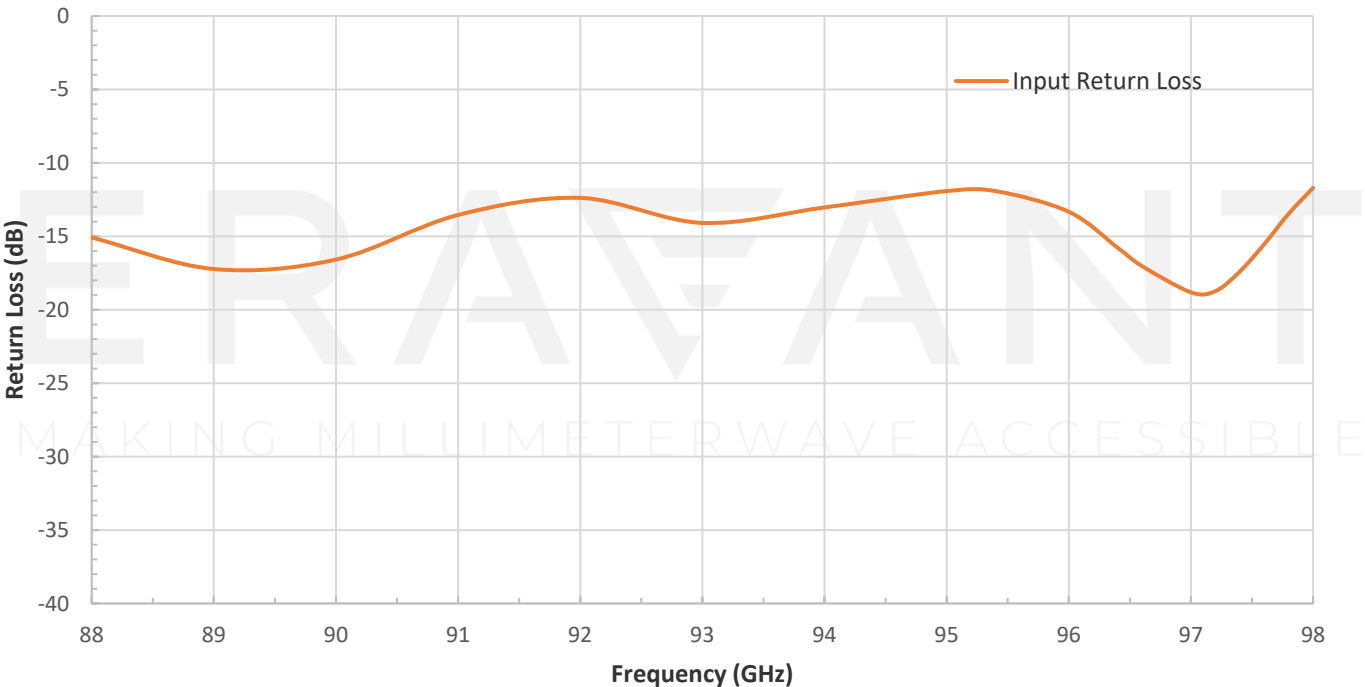

SBP-8839834833-1010-EP

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

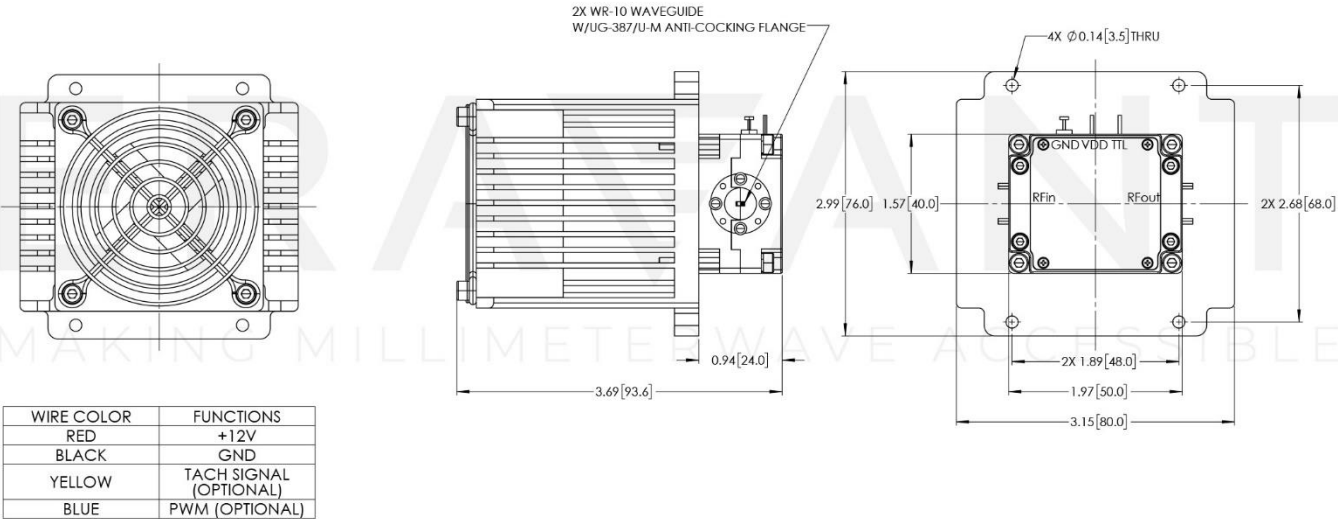

NOTE:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- Do not block the air inlets and outlets.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Do not plug or unplug any connectors when amplifier is activated. All connectors must be connected/disconnected when amplifier is off.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary
- Any foreign objects in the waveguide will degrade performance and/or damage the device.