

W-Band Power Amplifier, 92 to 96 GHz, 23 dB Gain, +32 dBm P_{sat}**Description:**

Model SBP-9239632330-1010-E1 is a power amplifier with a typical small signal gain of 23 dB and a nominal saturated output power of +32 dBm across the frequency range of 92 to 96 GHz. The DC power requirement for the amplifier is +16 V_{DC}/950 mA. The mechanical configuration offers an in line structure with WR-10 waveguides and UG-387/U-M anti-cocking flanges. Other port configurations, such as with 1 mm connectors or a right angle structure with WR-10 waveguides, are also available under different model numbers.

**Features:**

- High Output Power

Applications:

- Radar Systems
- Communication Systems
- Test Equipment


Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	92 GHz		96 GHz
Gain		23 dB	
P _{1dB}		+23 dBm	
P _{sat}		+32 dBm	
P _{in}			+20 dBm
Input Return Loss		8 dB	
Output Return Loss		8 dB	
DC Voltage		+16 V _{DC}	+17 V _{DC}
DC Supply Current		950 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C


Mechanical Specifications:

Item	Specification
Input Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Output Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) X 1.50" (L) X 0.75" (H)
Outline	BG-SW-2-A

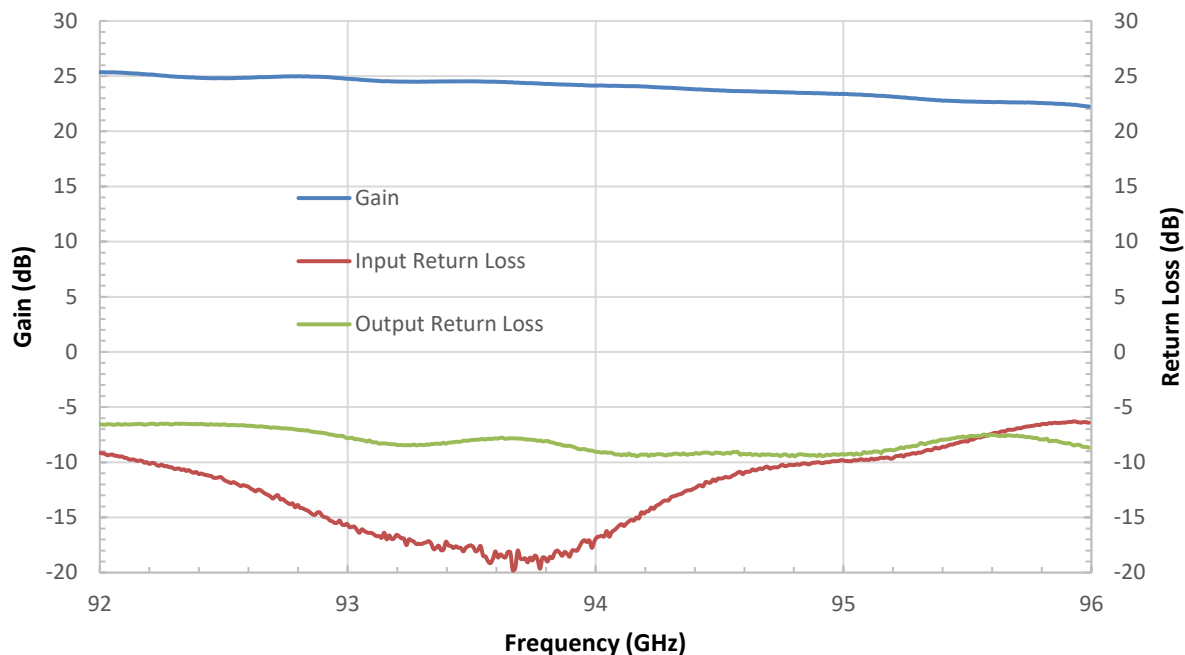


W-Band Power Amplifier, 92 to 96 GHz, 23 dB Gain, +32 dBm P_{sat}**Gain and Return Loss vs. Frequency**Bias: +16 V_{DC}/900 mA**Output Power vs. Frequency**Bias: +16 V_{DC}/900mA

RF Saturated: +16Vdc/ 2,000mA

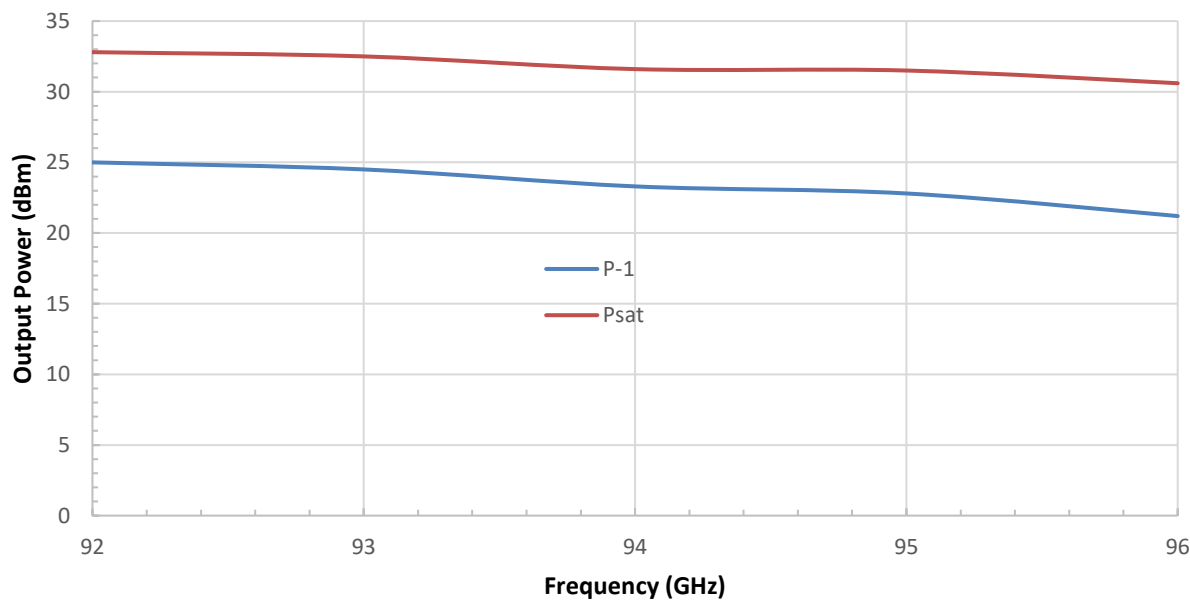

W-Band Power Amplifier, 92 to 96 GHz, 23 dB Gain, +32 dBm P_{sat}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

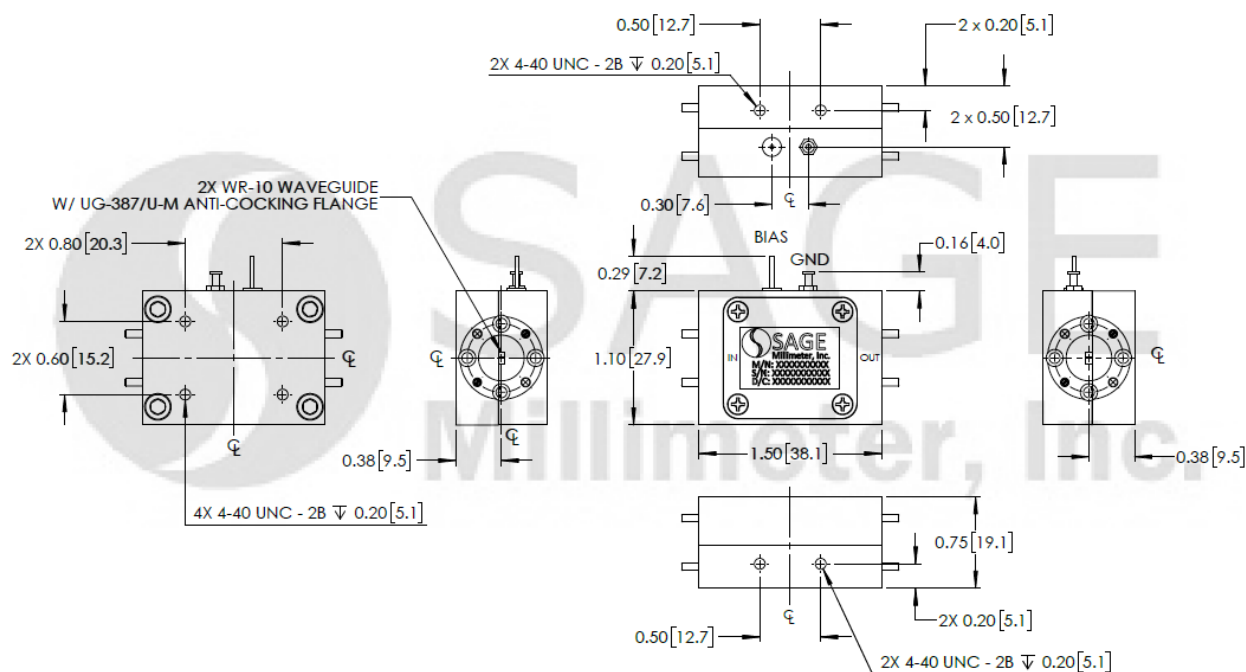

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.