



## W-Band Power Amplifier, 92 to 96 GHz, 35 dB Gain, +14 dBm P<sub>1dB</sub>

### Description:

**Model SBP-9239633514-1010-S1** is a power amplifier with a typical small signal gain of 35 dB and a nominal saturated output power of +14 dBm across the frequency range of 92 to 96 GHz. The DC power requirement for the amplifier is +8 V<sub>DC</sub>/250 mA. The mechanical configuration offers a right angle structure with WR-10 waveguides and UG-387/U-M flanges. Other port configurations, such as an inline structure with WR-10 waveguides or 1 mm connectors, are also available under different model numbers.



### Features:

- High Gain
- High Output Power

### Applications:

- Radar Systems
- Communication Systems
- Test Equipment

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	92 GHz		96 GHz
Gain		35 dB	
P <sub>1dB</sub>		+14 dBm	
P <sub>sat</sub>		+16 dBm	
P <sub>in</sub>			-14 dBm
Input Return Loss		6 dB	
Output Return Loss		6 dB	
DC Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+12 V <sub>DC</sub>
DC Supply Current		250 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

### Mechanical Specifications:

Item	Specification
Input Port	WR-10 Waveguide with UG-387/U-M Flange
Output Port	WR-10 Waveguide with UG-387/U-M Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.3 Oz
Size	1.10" (W) X 1.70" (L) X 0.50" (H)
Outline	BG-SW-1






## W-Band Power Amplifier, 92 to 96 GHz, 35 dB Gain, +14 dBm P<sub>1dB</sub>


### Typical Gain and Return Loss vs. Frequency

Bias: +8 V<sub>DC</sub>/250 mA

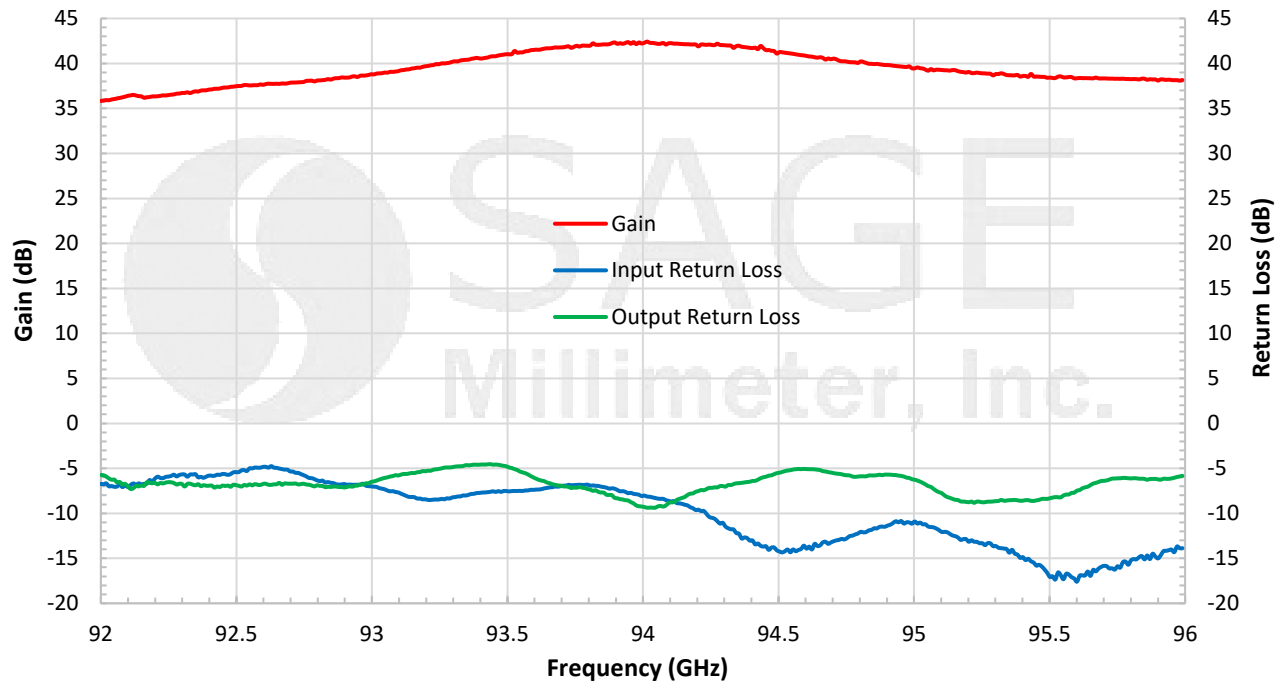

### Typical P<sub>sat</sub> vs. Frequency


Bias: +8 V<sub>DC</sub>/350 mA

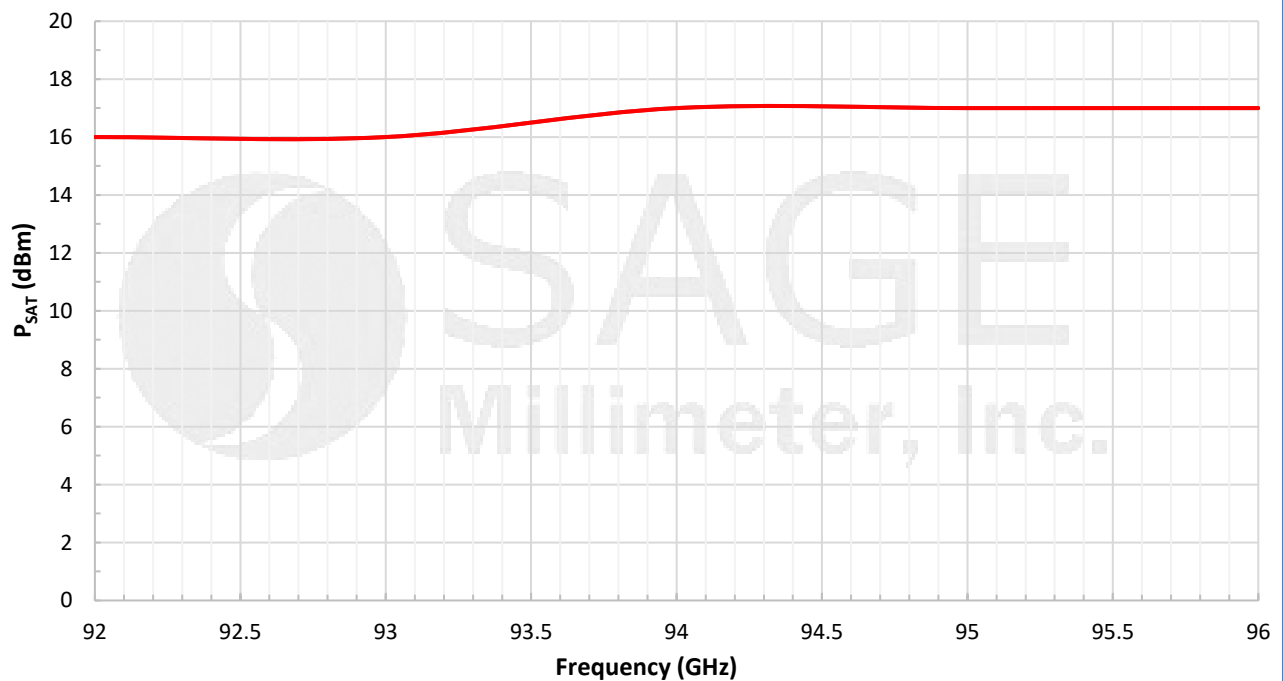



## W-Band Power Amplifier, 92 to 96 GHz, 35 dB Gain, +14 dBm P<sub>1dB</sub>

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

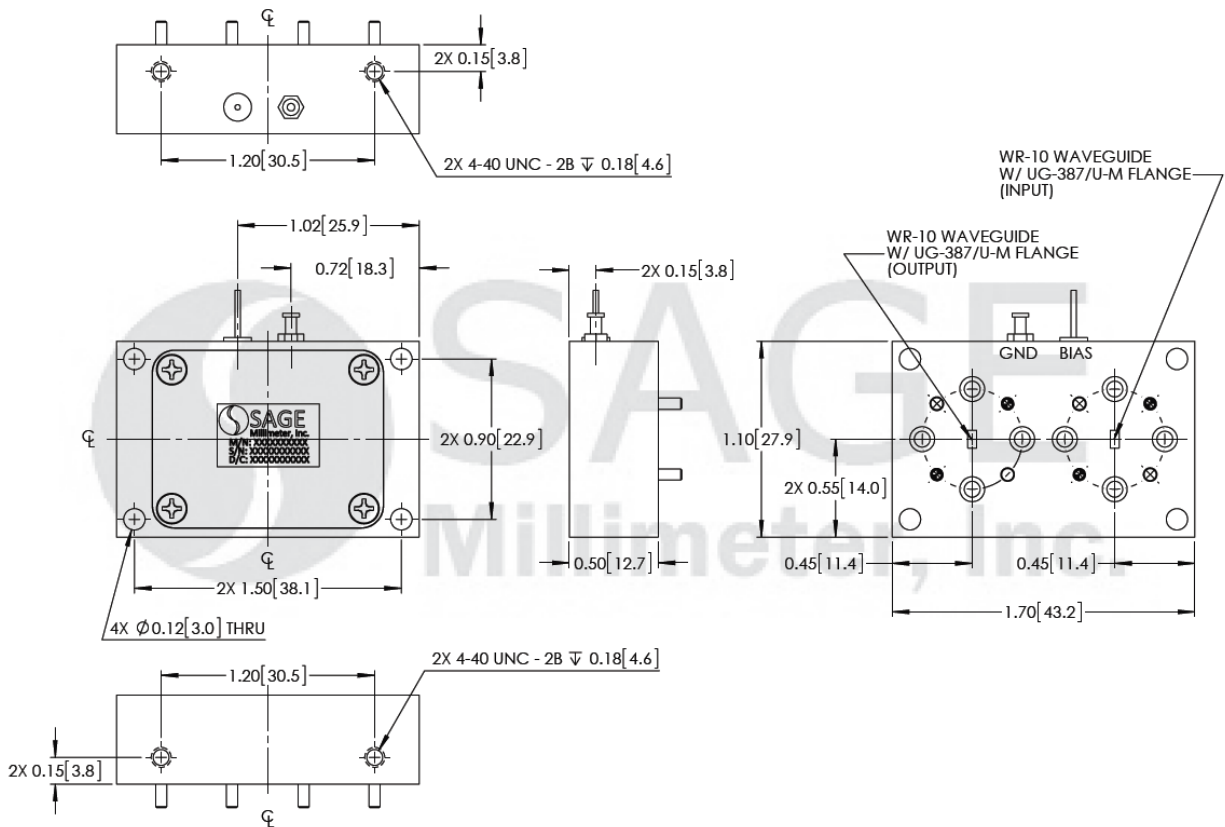

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

