

1 mm Coaxial Attenuator, 6 dB Attenuation

Description:

Model SCA-06-1M1F-UB is a 6 dB coaxial attenuator that is used in millimeterwave systems and operates from DC to 110 GHz. While the attenuator is designed and fabricated for full 1 mm coaxial band applications, the attenuation value of this model will have a wide range due its broadband coverage. Various attenuation values are available under different model numbers.



Features:

- Broadband Coverage
- Low Cost

Applications:

- Test Lab
- Instrumentation
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		110 GHz
Attenuation		6 dB	
Flatness			± 1.5 dB
Return Loss	12 dB	14 dB	
Power Handling			1 W (CW)
Impedance		50 Ω	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
Connector 1 Type	1 mm Male
Connector 2 Type	1 mm Female
Body Material	Stainless Steel
Connector Pin Material	Beryllium Copper
Insulator Material	PEI
Outline	CA-1-LN1



1 mm Coaxial Attenuator, 6 dB Attenuation

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

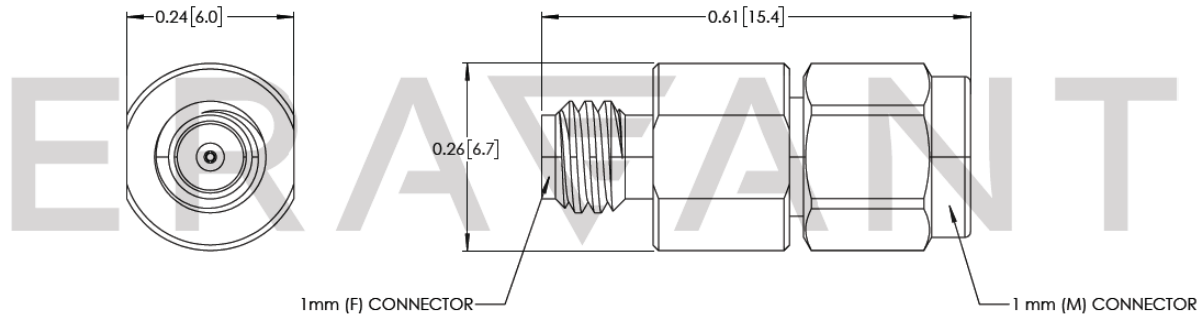

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque, 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm), should be used. **Eravant torque wrench, model SCH-06004-S1, is highly recommended.**

ERAVANT

