# SCA-06-SMSF-SD

# SMA Coaxial Fixed Attenuator, 6 dB Attenuation

**SCA-06-SMSF-SD** is a 6 dB coaxial attenuator that is used in millimeterwave systems and operates from DC to 26.5 GHz. The attenuator has a typical attenuation value of 6 dB across the frequency range. While the attenuator is designed and fabricated for full SMA coaxial band applications, the attenuation value of this model will have a wide range due to its broadband coverage. Various attenuation values are available under different model numbers.

# **Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Frequency Range	DC		26.5 GHz
Attenuation		6 dB	
Attenuation Accuracy		±0.5 dB	
Return Loss		20 dB	
Power Handling			2W (CW)
Impedance		50 Ω	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

# **Mechanical Specifications:**

Item	Specification	
Connector 1 Type	SMA Male	
Connector 2 Type	SMA Female	
Body Material	Stainless Steel	
Body Finish	Passivated	
Connector Pin Material	Beryllium Copper	
Connector Pin Finish	Gold Plated	
Insulator Material	PTFE	
Weight	0.3 Oz	
Length	0.64"	
Outline	CA-S-9	

### www.eravant.com | 424-757-0168 | support@eravant.com Copyright © 2023 by Eravant



### FEATURES

- Broadband Coverage
- Low Cost

## **APPLICATIONS**

- Test Lab
- Instrumentations
- System Integration


## SUPPLEMENTAL DETAILS




# SCA-06-SMSF-SD

ERA\ANT

# **Typical Performance vs. Frequency**

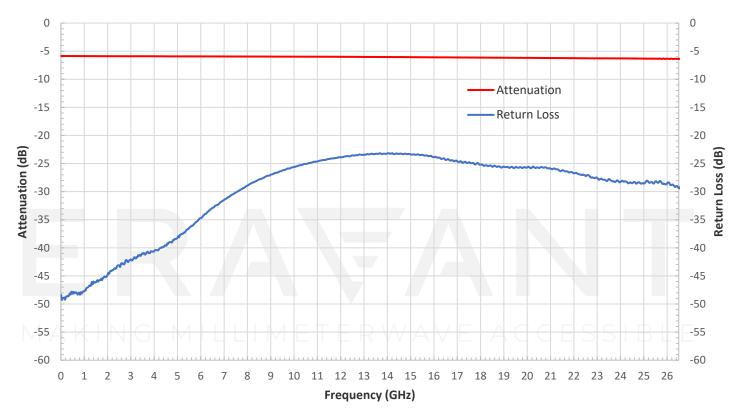

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

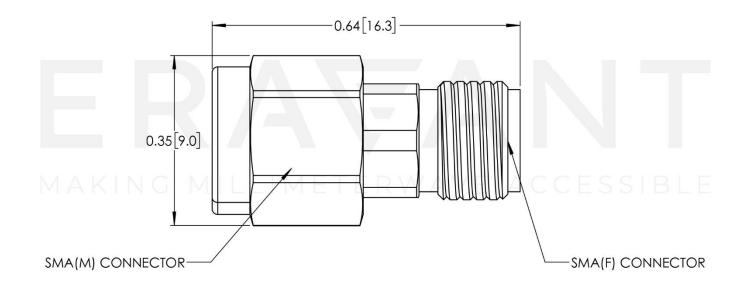

# ERA\ANT

# NOTE:

- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

## CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model <u>SCH-08008-S1</u> is highly recommended.

# ERAFANT

# MAKING MILLIMETERWAVE ACCESSIBLE

# ERAFANT MAKING MILLIMETER WAVE ACCESSIBLE