

## SCG-15060-F2

## WR-15 Waveguide Cable, Flexible, Armored, 6" Long

**SCG-15060-F2** is a 6" long WR-15 waveguide cable. The frequency range of the waveguide cable is 50 to 75 GHz. The cable allows for varied orientations of waveguide to waveguide connections. The cable has a typical insertion loss of 4.9 dB and a nominal return loss of 14 dB. The cable features a flexible metallic cable for added protection. Other lengths are offered under different model numbers.



## Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	50 GHz		75 GHz
Insertion Loss		4.9 dB	
Return Loss		14 dB	
Power Handling			2 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

## Mechanical Specifications:

Item	Specification
Waveguides	WR-15 with UG-385/U Anti-Cocking Flange
Waveguide Material and Finish	Gold Plated Aluminum
Cable Sleeve Material	Stainless Steel
Length	6"
Min. Centerline Bend Radius (E Plane)	45°/in
Min. Centerline Bend Radius (H Plane)	45°/in
Weight	0.5 Oz
Outline	CG-FV-A-F-L-LN1

## ECCN

EAR99

## FEATURES

- Full Band Coverage
- High Return Loss
- Flexible and Durable
- Armored Cable Design

## APPLICATIONS


- Test Lab
- Sub-assemblies

## SUPPLEMENTAL DETAILS



## SCG-15060-F2

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

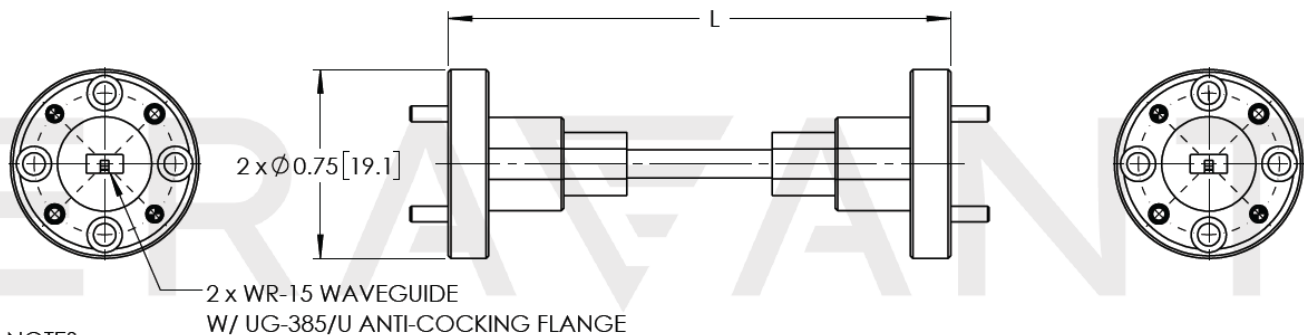

NOTES:  
LENGTH "L" IS CUSTOMIZABLE

**NOTE:**

- Length "L" can be customizable.
- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Exceeding absolute maximum ratings shown will damage the device.
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.