



SMPS (F) to 1.0 mm (F) Coaxial Adapter

Description:

Model SCT-AF1F-UB is a SMPS (G3PO) female to 1 mm female coaxial adapter that covers the frequency range of DC to 100 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a high return loss. The impedance of the adapter is 50 Ohms. Other configurations are available under different model numbers.



Features:

- Instrumentation Grade
- High Return Loss

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		100 GHz
Return Loss		14 dB	
Impedance		50 Ω	
Specification Temperature		+25 $^{\circ}$ C	
Operating Temperature	-40 $^{\circ}$ C		+85 $^{\circ}$ C


Mechanical Specifications:

Item	Specification
Connector 1 Type	SMPS Female
Connector 2 Type	1.0 mm Female
Body Material	Beryllium Copper
Body Finish	Gold Plated
Contact Material	Beryllium Copper
Insulator Material	PEI
Weight	0.09 Oz (2.5 Grams)
Length	0.44"
Outline	CT-AF1F-LN1




SMPS (F) to 1.0 mm (F) Coaxial Adapter

Typical Return Loss vs. Frequency

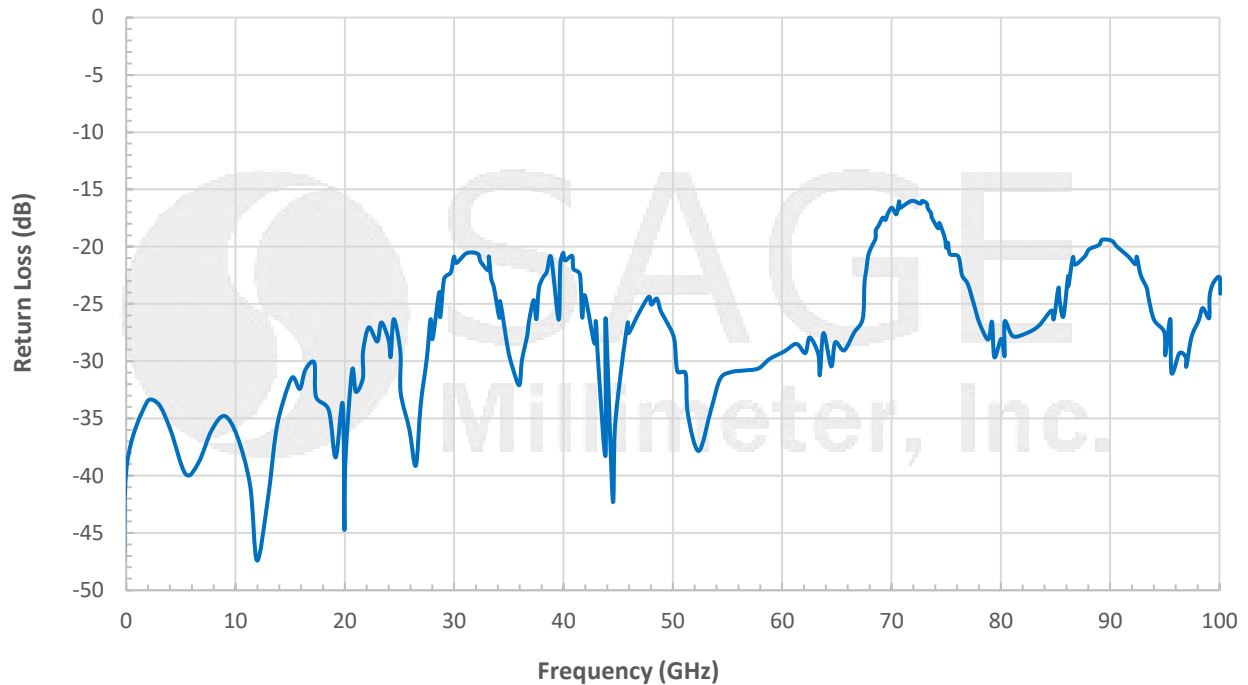

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

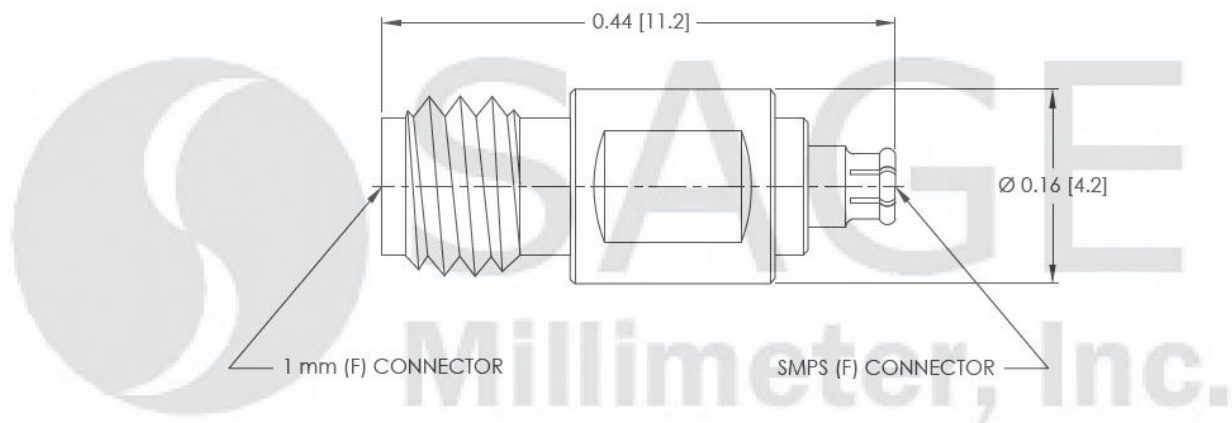

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com