

SMPM (F) to 1 mm (M) Coaxial Adapter

Description:

Model SCT-DF1M-UB is a SMPM (GPPO) female to 1 mm male coaxial adapter that covers the frequency range of DC to 65 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a high return loss and typical insertion loss of 1.0 dB. The impedance of the adapter is 50 Ohms. Other configurations are available under different model numbers.



Features:

- Instrumentation Grade
- High Return Loss
- Low Insertion Loss

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|------------------|------------------|------------------|
| Frequency | DC | | 65 GHz |
| Insertion Loss | | 1.0 dB | |
| Return Loss | | 16 dB | |
| Impedance | | 50 Ω | |
| Specification Temperature | | +25 $^{\circ}$ C | |
| Operating Temperature | -40 $^{\circ}$ C | | +85 $^{\circ}$ C |


Mechanical Specifications:

| Item | Specification |
|--------------------|---------------------|
| Connector 1 Type | SMPM Female |
| Connector 2 Type | 1 mm Male |
| Body Material | Stainless Steel |
| Body Finish | Passivated |
| Contact Material | Beryllium Copper |
| Insulator Material | PEI |
| Weight | 0.09 Oz (2.5 Grams) |
| Length | 0.71" |
| Outline | CT-DF1M-LN1 |




SMPM (F) to 1 mm (M) Coaxial Adapter

Typical Performance vs. Frequency

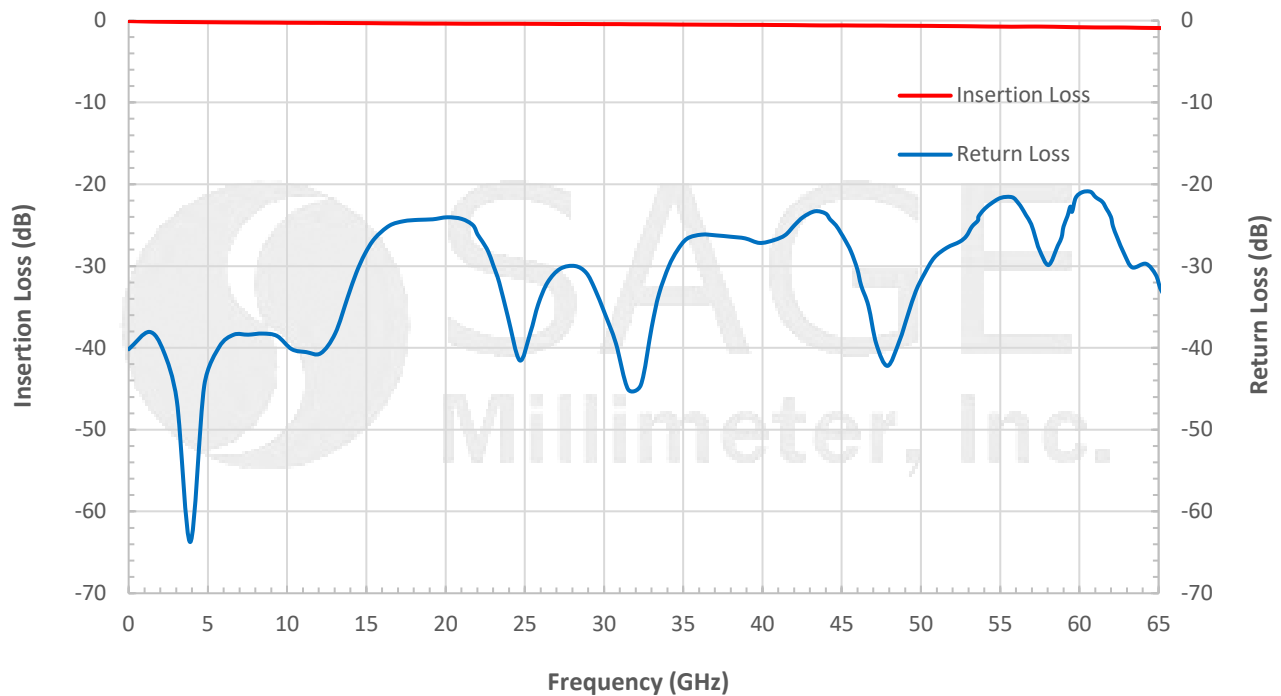

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

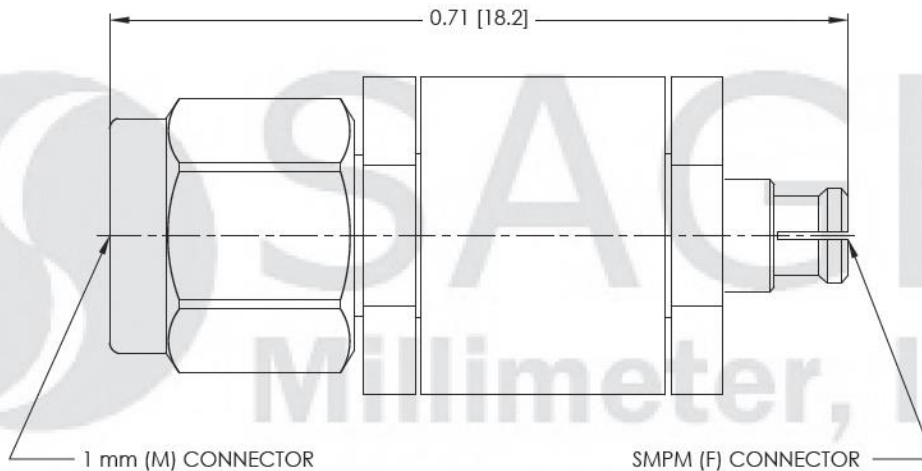

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

