

SNW-1341441518-06-CO

D-Band Waveguide Junction Circulator, 132 to 138 GHz

SNW-1341441518-06-CO is a D-Band waveguide junction circulator that covers the frequency range of 132 to 138 GHz. The waveguide junction circulator is designed and manufactured to provide a low insertion loss of 1.5 dB nominal, a typical isolation of 18 dB, and a much shorter insertion length for system integration. The RF ports are WR-06 waveguides with UG-387/U-M anti-cocking flange.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	132 GHz		138 GHz
Insertion Loss		1.5 dB	
Isolation		18 dB	
Return Loss		16 dB	
Forward Power Handling			3 W (CW)
Reverse Power Handling			3 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
RF Ports	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Body Material	Aluminum
Body Finish	Gold Plated
Cover Finish	Black Anodized
Weight	0.8 Oz
Size	1.00" (L) x 1.00" (W) x 0.85" (H)
Outline	NW-CD-A

ECCN

EAR99

FEATURES

- Low Insertion Loss
- Moderate Isolation
- Compact Configuration


APPLICATIONS

- Radar Systems
- Communication Systems
- Port Isolation
- Module Integration

SUPPLEMENTAL DETAILS



Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

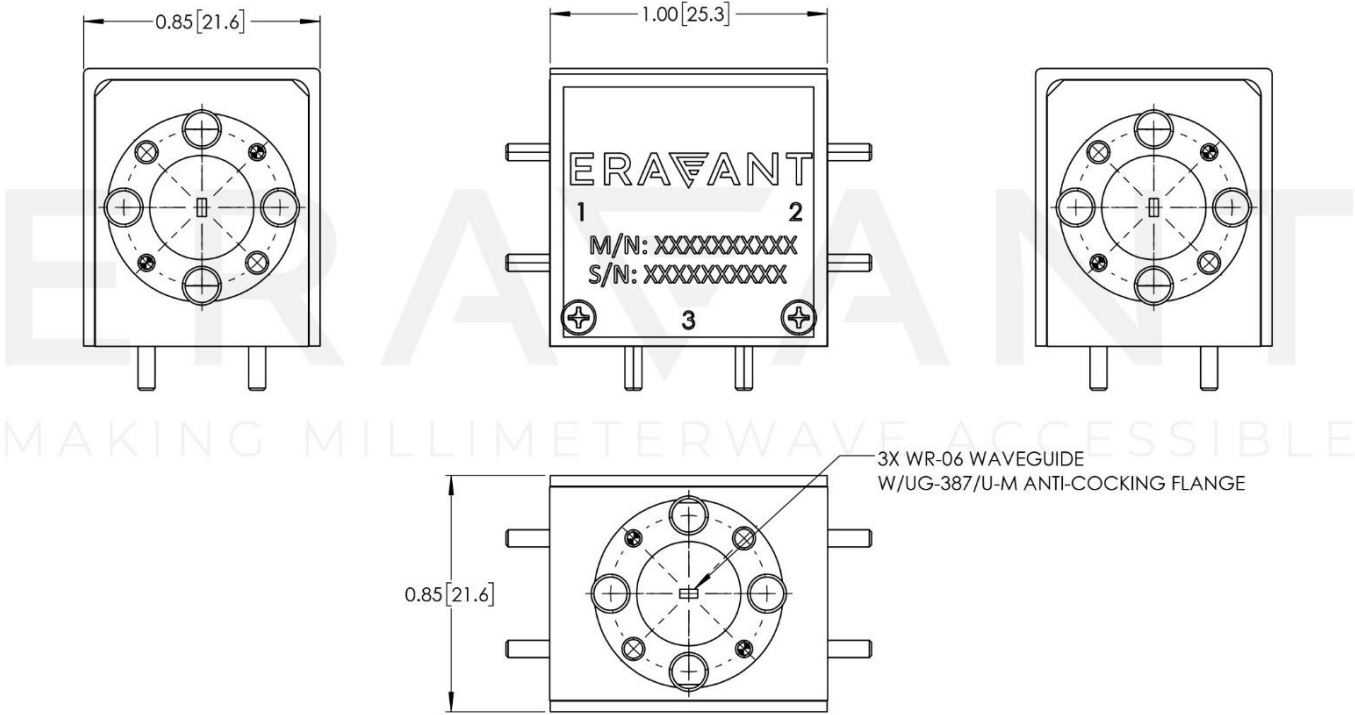

NOTE:

- All data presented is collected from a sample lot. Actual data may vary from unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings will damage the device.
- This device is magnetic sensitive. Keep the device at least 6" away from magnetic fields.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.