




2.92 mm (M) to 1.85 mm (F) Coaxial Adapter

Description:

Model SCT-KMVF-UB is a 2.92 mm male to 1.85 mm female coaxial adapter that covers the frequency range of DC to 40 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a high return loss and typical insertion loss of 0.8 dB. The impedance of the adapter is 50 Ohms. Other configurations are available under different model numbers.

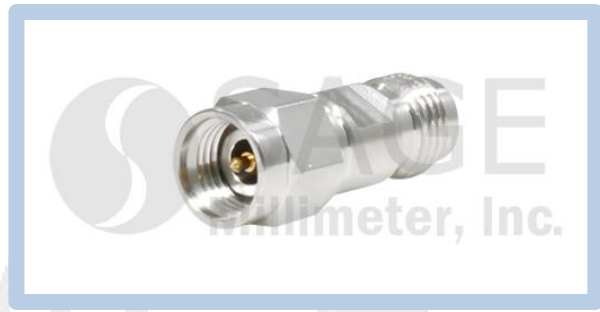

Features:

- Instrumentation Grade
- High Return Loss
- Low Insertion Loss

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		40 GHz
Insertion Loss		0.8 dB	
Return Loss		21 dB	
Impedance		50 Ω	
Specification Temperature		+25 $^{\circ}$ C	
Operating Temperature	-40 $^{\circ}$ C		+85 $^{\circ}$ C

Mechanical Specifications:


Item	Specification
Connector 1 Type	2.92 mm Male
Connector 2 Type	1.85 mm Female
Body Material	Stainless Steel
Body Finish	Passivated
Contact Material	Beryllium Copper
Insulator Material	PEI
Weight	0.16 Oz
Length	0.83"
Outline	CT-KMVF-LN1






2.92 mm (M) to 1.85 mm (F) Coaxial Adapter

Typical Performance vs. Frequency

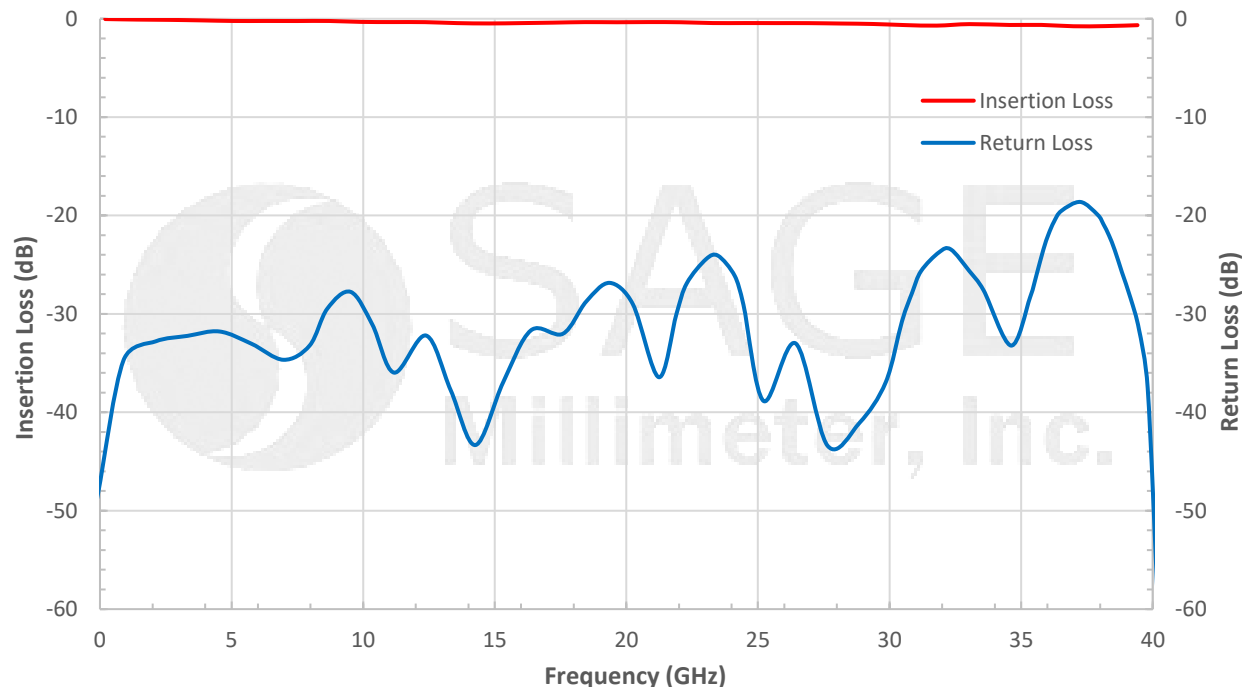

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

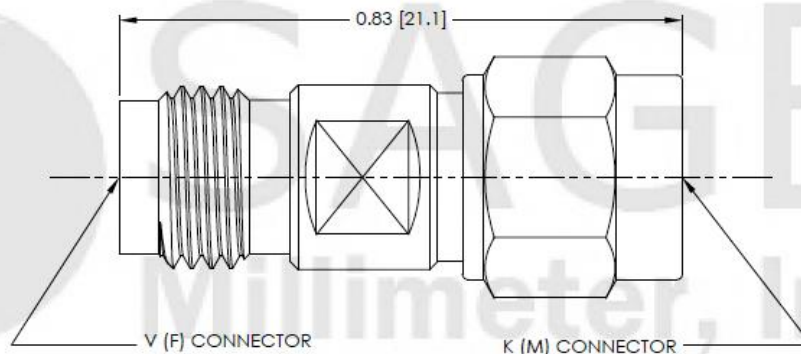

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**

