



E-Band Bias Tuned Gunn Oscillator, 75.0 GHz

Description:

Model SOB-75305218-12-S1 is an E-Band Bias Tuned Gunn Oscillator that utilizes a high performance InP Gunn diode and proprietary cavity design to deliver +18 dBm typical power directly with a frequency tuning range of ± 250 MHz. The oscillator delivers low AM/FM noise and harmonic emissions in the wide mechanical tuning range. Compared to its counterparts, such as multiplier based sources, the Gunn oscillator is an alternative lower cost and cleaner source. The center frequency of the oscillator can be mechanically trimmed via a self-locking set screw within ± 1.0 GHz frequency range.



Features:

- Low AM/FM Noise and Harmonics
- Mechanical Tunable
- Temperature Range: 0 to +50°C

Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		75.0 GHz	
Power Output	+17 dBm	+18 dBm	
Mechanical Tuning Range		± 1.0 GHz	
Bias Tuning Range		± 250 MHz	
Bias Voltage		+10.0 V _{DC}	+10.5 V _{DC}
Bias Tuning Voltage Range	+9.3 V _{DC}		+10.5 V _{DC}
Bias Current		250 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C




E-Band Bias Tuned Gunn Oscillator, 75.0 GHz

Mechanical Specifications:

Item	Specification
RF Port	WR-12 Waveguide with UG-387/U Flange
Bias and Tuning Port	SMA (F)
Mechanical Tuning Mechanism	Self-locking Set Screw
Housing Material	Aluminum
Finishing	Gold Plating
Weight	3 Oz
Outline	OM-SE-C

Frequency and Power Output vs. Bias Voltage


Bias: +9.3 to 10.5 Vdc/220 mA

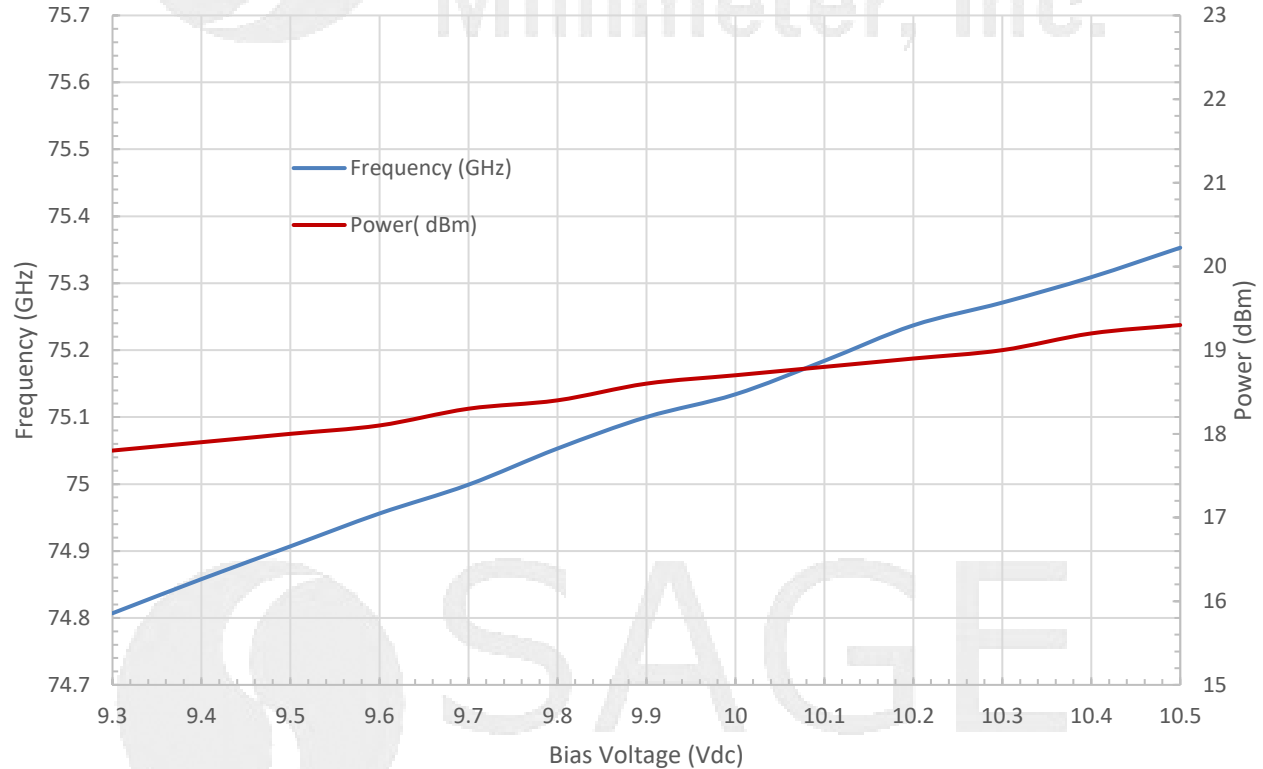



E-Band Bias Tuned Gunn Oscillator, 75.0 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

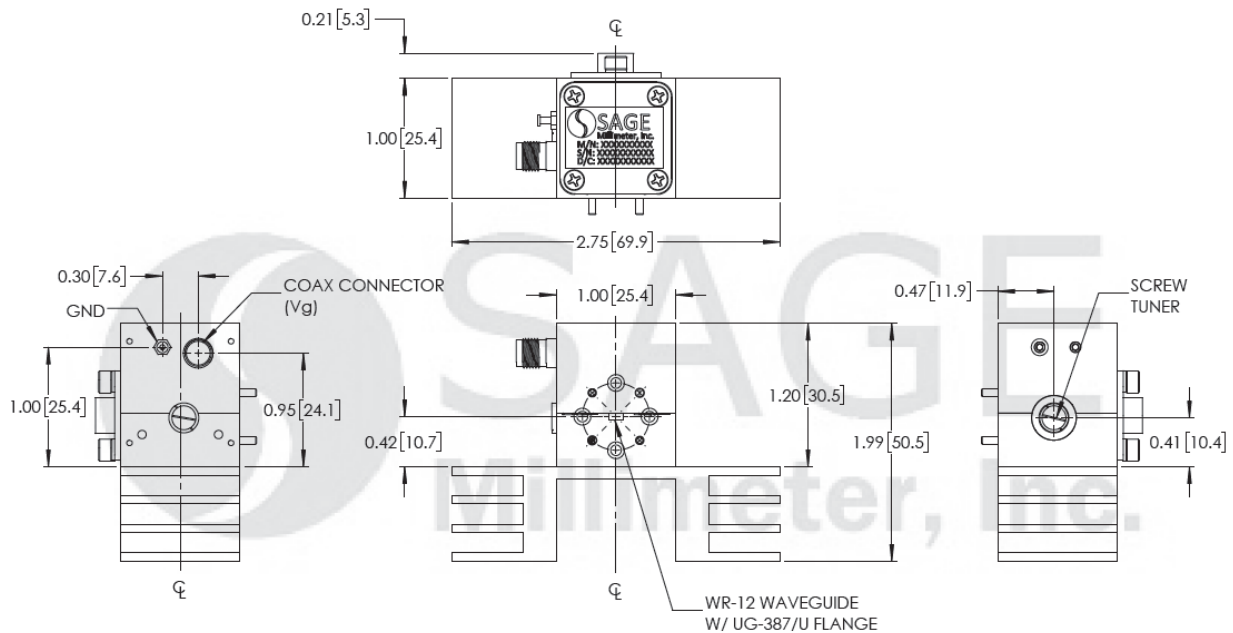

Note:

- All data are presented using a limited sample lot, actual data may vary unit to unit.
- The data given above was tested under case temperature **+30 °C**.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Bias voltage never **exceeds +10.5 Volts**.
- Keep fan on if necessary. The case temperature shall never exceed **+55 °C**.

