



## Dielectric Resonator Oscillator, 28 GHz, +16 dBm

### Description:

Model **SOD-28303216-KF-S1** is a mechanically tuned, dielectric resonator oscillator with a center frequency of 28 GHz and a mechanical tuning range of  $\pm 25$  MHz. The oscillator delivers a nominal output power of +16 dBm with a low phase noise and harmonic emissions. The oscillator takes a +8 V<sub>DC</sub>/350 mA DC bias. The RF output is equipped with a female K connector.



### Features:

- Low AM/FM Noise and Harmonics
- Mechanically Tunable

### Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		28 GHz	
Power Output		+16 dBm	
Mechanical Tuning Range		$\pm 25$ MHz	
Frequency Stability			$\pm 4$ ppm/ $^{\circ}$ C
Phase Noise @ 100 KHz Offset		-100 dBc/Hz	
Spurious			-75 dBc
Harmonics			-40 dBc
Bias Voltage		+8 V <sub>DC</sub>	
Bias Current		350 mA	
Specification Temperature		+25 $^{\circ}$ C	
Operating Temperature	-0 $^{\circ}$ C		+50 $^{\circ}$ C

### Mechanical Specifications:


Item	Specification
RF Port	K (F)
DC Bias	Solder Pin
Case Material	Aluminum
Finish	Chem Film
Weight	4 Oz
Size	1.85" (L) x 1.00" (W) x 0.90" (H)
Outline	OD-FCK-P1





## Dielectric Resonator Oscillator, 28 GHz, +16 dBm

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

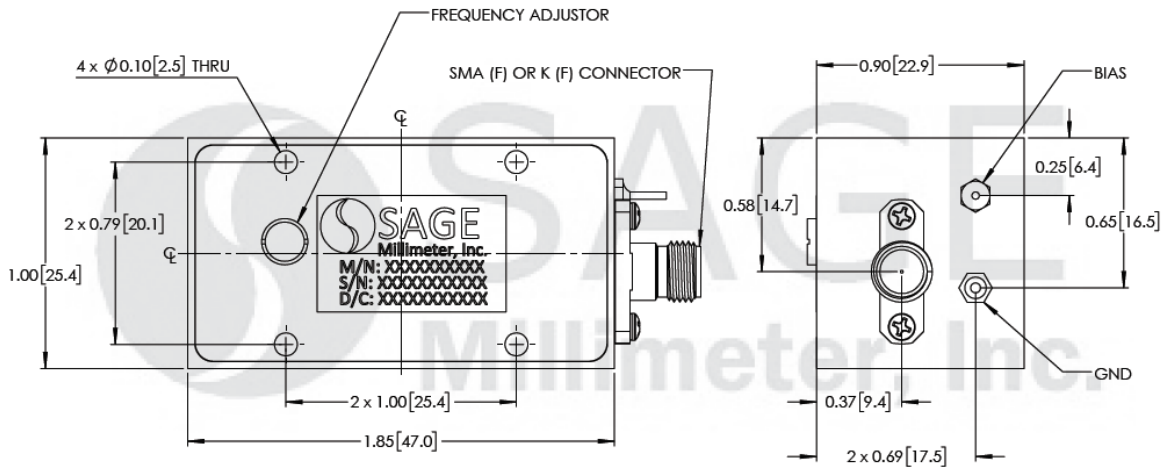

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

**Caution:**

- Reversing polarity bias will destroy the device.
- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed **+50°C**. Use additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

