

2.92 mm (M) to 2.92 mm (M) Coaxial Cable, Flexible, 6", Phase Matched

Description:

Model SCW-KMKM006-F1-PM is a 6" long, flexible, phase matched coaxial cable with 2.92 (K) mm male connectors that cover the frequency range of DC to 40 GHz. The coaxial cable utilizes high performance material and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



Features:

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		40 GHz
Insertion Loss @ 18 GHz		< 0.6 dB	
Insertion Loss @ 26.5 GHz		< 0.7 dB	
Insertion Loss @ 32 GHz		< 0.9 dB	
Insertion Loss @ 40 GHz		< 1.0 dB	
Return Loss @ 40 GHz		18 dB	
Impedance		50 Ω	
Phase Match (Unit to Unit)		$\pm 10^\circ$	
Breakdown Voltage			500 Volts
Radiation Shielding		90 dB	
Power Handling (@ 40 GHz)			18 W (CW)
Specification Temperature		+25 $^\circ\text{C}$	
Operating Temperature	-40 $^\circ\text{C}$		+85 $^\circ\text{C}$


Mechanical Specifications:

Item	Specification
Connectors	2.92 mm Male
Connector Contact Material/Plating	Beryllium Copper (BeCu)/Gold Plating Per MIL-G-45204
Connector / Cable Insulation Layer Material	Passivated Stainless Steel / PEEK/PEI
Cable Jacket Material	PFA
Cable Outer Diameter	0.087"
Length	6"
Minimum Bending Radius	0.5"
Repeated Bending Radius	0.867"
Weight	0.7 Oz
Outline	CW-KK-F8




2.92 mm (M) to 2.92 mm (M) Coaxial Cable, Flexible, 6", Phase Matched

Typical Performance vs. Frequency

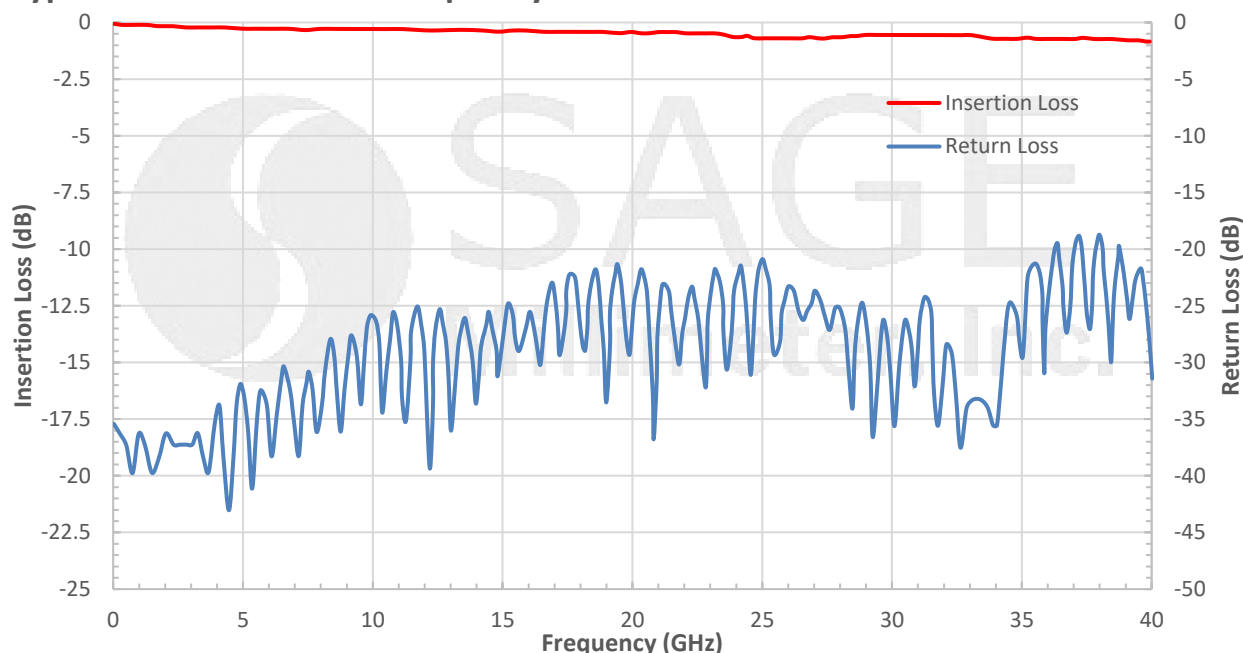

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

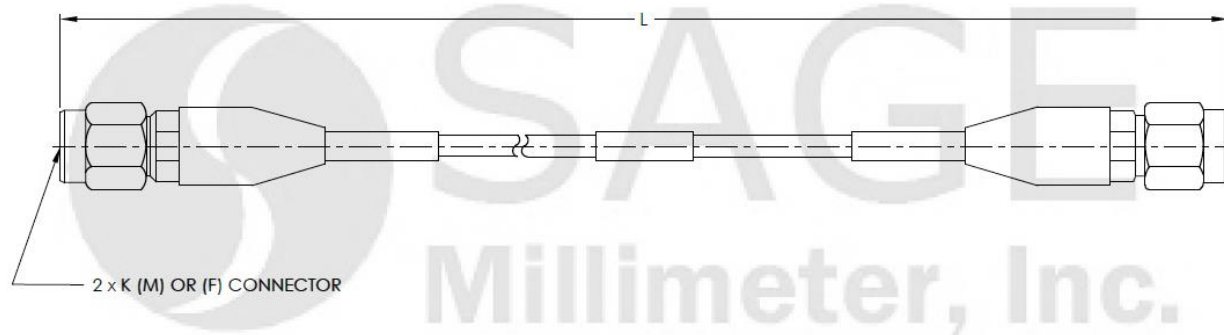

Note:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**

