



Phase Locked Oscillator, 9.5 GHz, +13 dBm, Combined Internal and External

Description:

Model SOP-10310113-SF-BB-2 is a phase locked oscillator based on a high performance DRVCO (Dielectric Resonator Voltage Controlled Oscillator) technology to generate a clean and high-quality microwave signal. The oscillator has a built-in 100 MHz internal reference crystal oscillator. The oscillator is designed and fabricated to be phase locked to the internal reference oscillator automatically if the 10 MHz external reference is absent. The oscillator delivers a typical output power of +13 dBm and has nominal harmonic and spurious levels of -25 dBc and -75 dBc, respectively. The oscillator has a built-in voltage regulator to further improve the signal quality and prevent possible damage due to over voltage operation. The oscillator is hermetically sealed to offer the maximum environmental performance.



Features:

- High Output Power
- Low Phase Noise
- Low Harmonic Components

Applications:

- Radar Systems
- Communication Links
- Transmitters and Receivers

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency		9.5 GHz	
Output Power		+13 dBm	
Phase Noise (Internal Reference)	-110 dBc/Hz @10 kHz		
	-115 dBc/Hz @100 kHz		
	-130 dBc/Hz @1 MHz		
Phase Noise (External Reference)	Reference Source + 20 Log (N) + 3 dB		
Internal Reference Frequency	100 MHz		
External Reference Frequency	10 MHz		
External Reference Input Power	-3 dBm	0 dBm	+3 dBm
Sub-Harmonics			-60 dBc
Harmonics		-25 dBc	-20 dBc
Spurious		-75 dBc	-70 dBc
Phase Locked Indicator (LOCK)	TTL "High"		
Phase Error Voltage (V _T)	0 to + 10 V _{DC}		
DC Voltage		+12 V _{DC}	+15 V _{DC}
DC Supply Current		550 mA	
Frequency Stability		±5 ppm	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+70 °C





Phase Locked Oscillator, 9.5 GHz, +13 dBm, Combined Internal and External

Mechanical Specifications:

Item	Specification
RF Output	SMA(F) Connector
REF Input	SMA(F) Connector
REF Output	SMA(F) Connector
DC Bias Port (V_{CC})	Feedthru Pin
Phase Lock Indicator Port (LD)	Feedthru Pin
Phase Error Voltage (V_T)	Feedthru Pin
Case Material	Aluminum
Finish	Nickel Plated and Bare Aluminum
Package	Hermetically Sealed
Weight	4.0 Oz
Size	2.25" (L) X 2.25" (W) X 1.41" (H)
Outline	OP-EC-SM1

Measured Data:


Parameter	Operating Temperature		
	-40°C	+25°C	+75°C
Output Frequency	9.5 GHz	9.5 GHz	9.5 GHz
Output Power	13.7 dBm	13.5 dBm	12.9 dBm
Spurious	-75 dBc	-75 dBc	-75 dBc
Harmonics	-25 dBc	-25 dBc	-25 dBc
Voltage (V)	12	12	12
Current (mA)	480	400	300






Phase Locked Oscillator, 9.5 GHz, +13 dBm, Combined Internal and External

Measured Phase Noise:

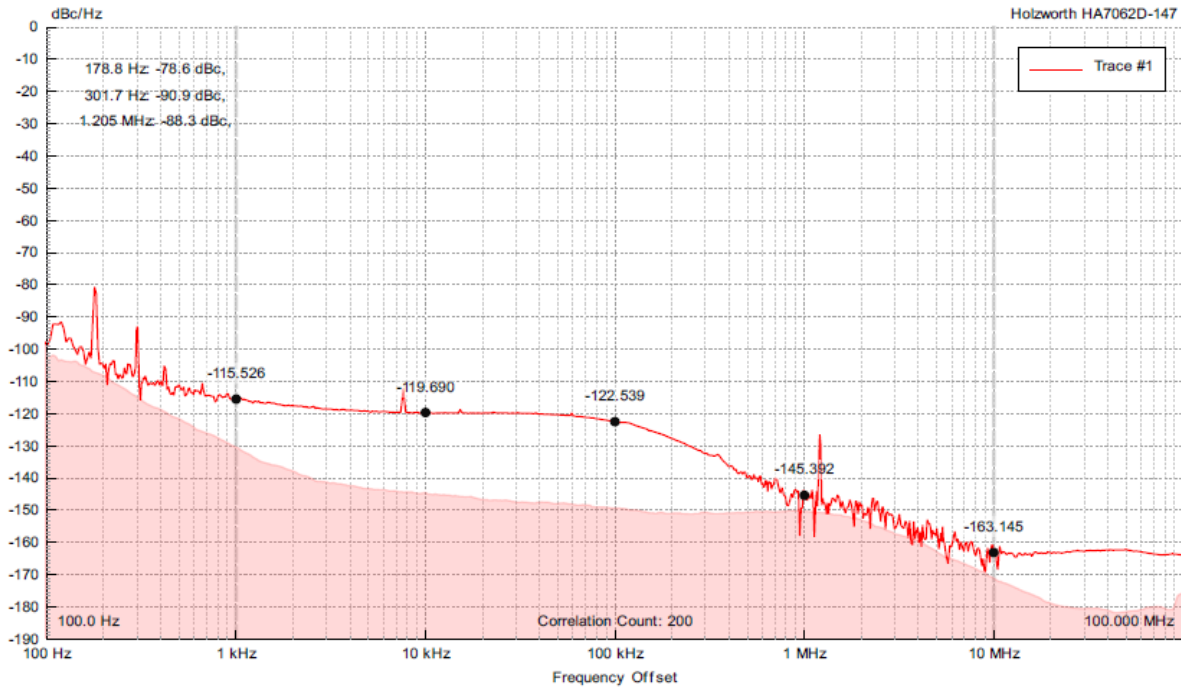

Trace #1	DUT Info	Jitter Stats	Marker Freq	Value [dBc/Hz]	Spur Freq	Value [dBc]
S/N: HA7062D-147	Freq: 9.4999963900 GHz	Start: 1.00 kHz	1.00 kHz	-115.53	178.8 Hz	-78.63
Type: Absolute	Power: 10.760 dBm	Stop: 10.000 MHz	10.00 kHz	-119.69	301.7 Hz	-90.93
Date: 2024-01-30	Gain: 42 dB	Jitter: 9.193 fs	100.00 kHz	-122.54	1.205 MHz	-88.30
Time: 11:29:58	Acq: 53.687 s	Noise: 3.144e-02°	1.000 MHz	-145.39		
Temp: 53.78°C	Offset: 100.0 Hz		10.000 MHz	-163.15		
Limit Test: None	# Correlations: 200					

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

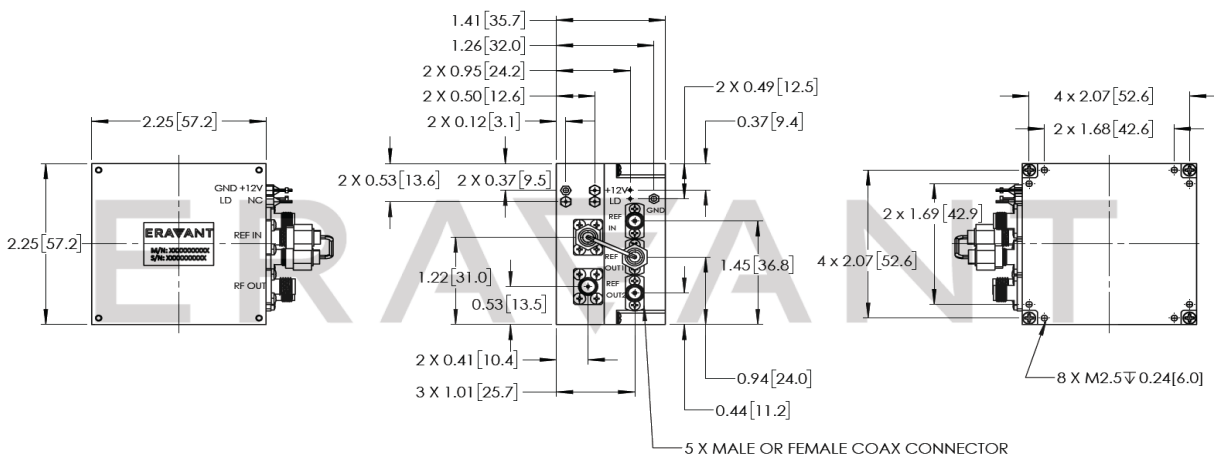



Phase Locked Oscillator, 9.5 GHz, +13 dBm, Combined Internal and External

Note:

- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed **+70 °C**. Use additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

