



Ka-Band, X3 Active Frequency Multiplier, 28 to 32 GHz, +18 dBm P_{out}

Description:

Model SFA-283323318-28SF-E1 is an active X3 frequency multiplier. The multiplier triples the input signal of 9.33 to 10.66 GHz at +10 dBm to yield an output signal of 28.0 to 32.0 GHz at +18 dBm. The harmonic suppression of the multiplier is -20 dBc typical. The DC power requirement for the multiplier is +8 V_{DC} at 350 mA. The input port of this model is a female SMA connector and the output port is a WR-28 Uni-Guide™ waveguide with a UG-599/U flange. It is an in-line angle configuration. Other port configurations, such as right angle, are also available under different model numbers.



Features:

- High Output Power
- Low Harmonic Content

Applications:

- Frequency Extenders
- Source Modules
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Input Frequency	9.33 GHz		10.66 GHz
Input Power		+10 dBm	+20 dBm
Output Frequency	28.00 GHz		32.00 GHz
Output Power		+18 dBm	
Harmonic Suppression		-20 dBc	
Spurious		-60 dBc	
Port Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+12 V _{DC}
DC Supply Current		350 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:


Item	Specification
Input Port	SMA (F)
Output Port	WR-28 Uni-Guide™ Waveguide with UG-599/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finishing	Gold Plated
Weight	1.5 Oz
Size	1.63" (L) X 1.20" (W) X 0.75" (H)
Outline	BG-SA-2CW




Ka-Band, X3 Active Frequency Multiplier, 28 to 32 GHz, +18 dBm P_{out}

Output Power vs. Frequency

Bias: +8 V_{DC}/350 mA; Input Power = +10 dBm

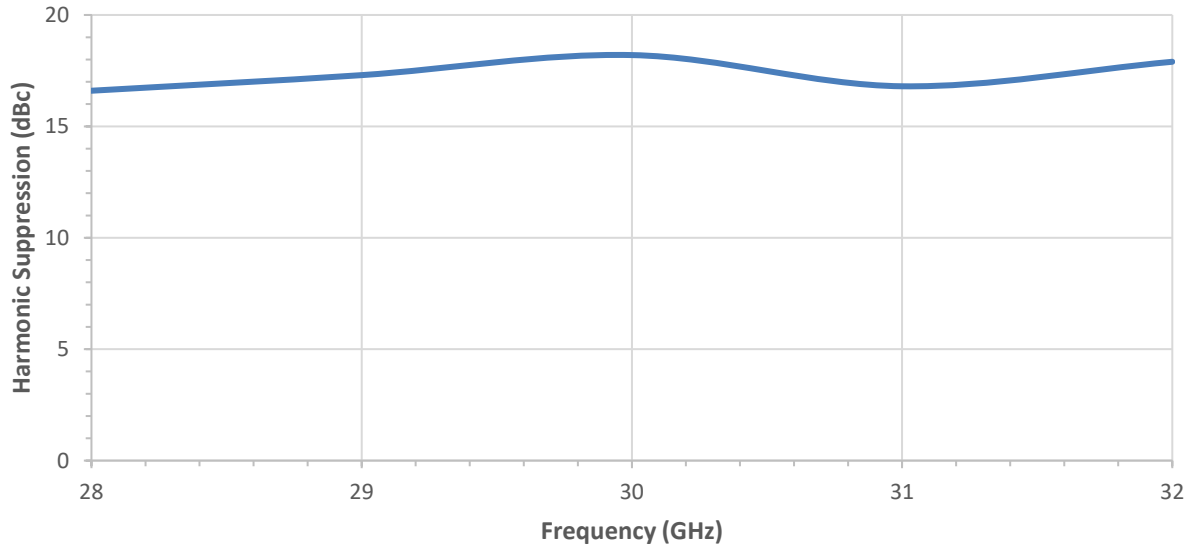

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

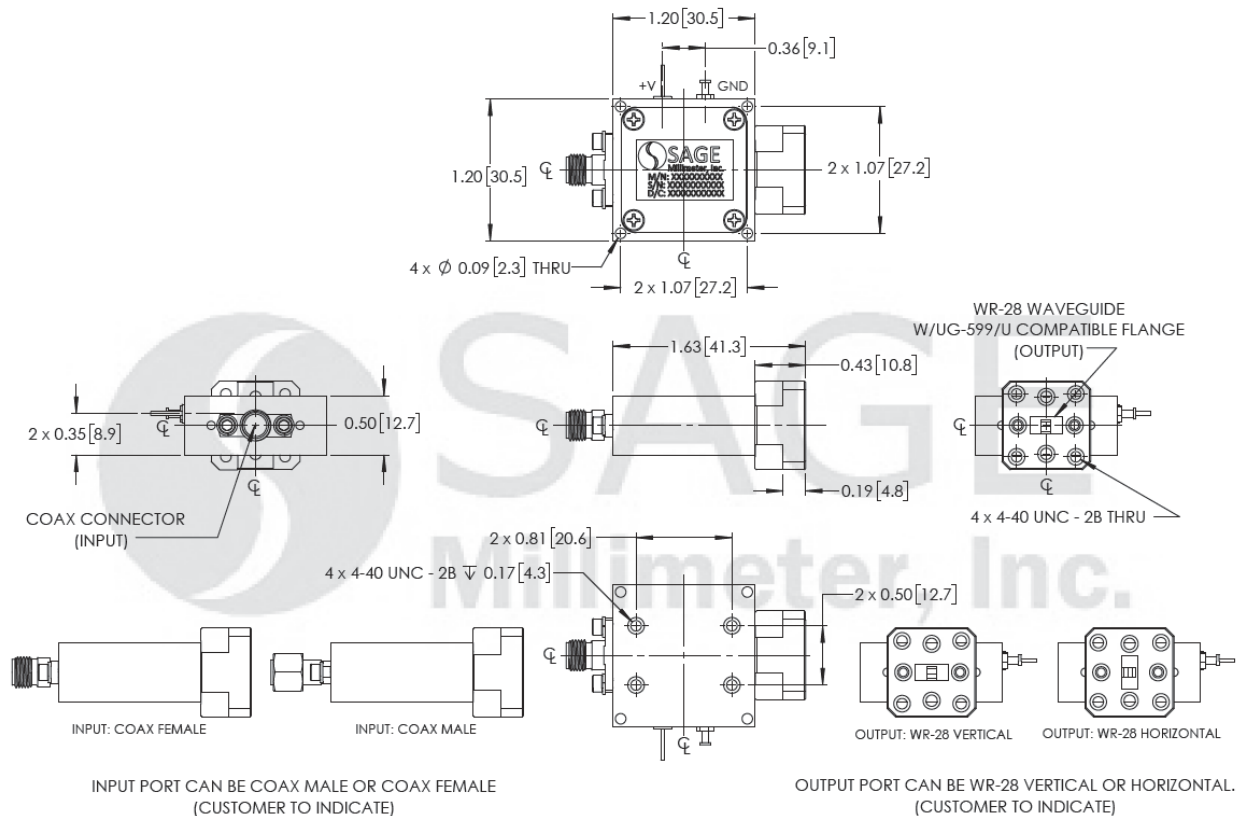



Ka-Band, X3 Active Frequency Multiplier, 28 to 32 GHz, +18 dBm P_{out}

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25°C case temperature.
- The active multiplier employs SAGE Millimeter's trademarked and patent pending technology, **Uni-Guide™**, as its output waveguide interface. The orientation of the output waveguides can be specified through corresponding model numbers. For example, the model number for a horizontal output waveguide configuration would be **SFA-283323318-28HSF-E1** instead of the default **SFA-283323318-28SF-E1** which indicates vertical orientation output.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



SAGE
Millimeter, Inc.