



## Ka Band, X4 Active Frequency Multiplier, +20 dBm P<sub>out</sub>

### Description:

**Model SFA-284SF-S1** is an active X4 frequency multiplier. The multiplier has an input frequency of 6.63 to 10 GHz with a typical input power of +5 dBm and an output frequency of 26.5 to 40 GHz with a typical output power of +20 dBm. The multiplier also has a typical harmonic suppression of -15 dBc. The DC power requirement for the multiplier is +8 V<sub>DC</sub>/300 mA. The input port is a female SMA connector and the output is a WR-28 waveguide with a UG-599/U flange. Other port configurations are available under different model numbers.



### Features:

- Full Waveguide Band Coverage
- Full Band Coverage
- High Output Power
- Low Harmonic Components

### Applications:

- Frequency Extenders
- Source Modules
- Communication Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Input Frequency	6.63 GHz		10.00 GHz
Input Power		+5 dBm	
Output Frequency	26.50 GHz		40.00 GHz
Output Power		+20 dBm	
P <sub>in</sub>	+2 dBm	+5 dBm	+10 dBm
Harmonic Suppression		-15 dBc	
Spurious		-60 dBc	
DC Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+15 V <sub>DC</sub>
DC Supply Current		300 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

### Mechanical Specifications:

Item	Specification
Input Port	SMA (F)
Output Port	WR-28 Waveguide with UG-599/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Size	1.20" (W) x 2.10" (L) x 0.50" (H)
Weight	1.5 Oz
Outline	BG-SA-1CW







## Ka Band, X4 Active Frequency Multiplier, +20 dBm P<sub>out</sub>

### Typical Output Power vs. Output Frequency

Bias: +8 V<sub>DC</sub>/250 mA

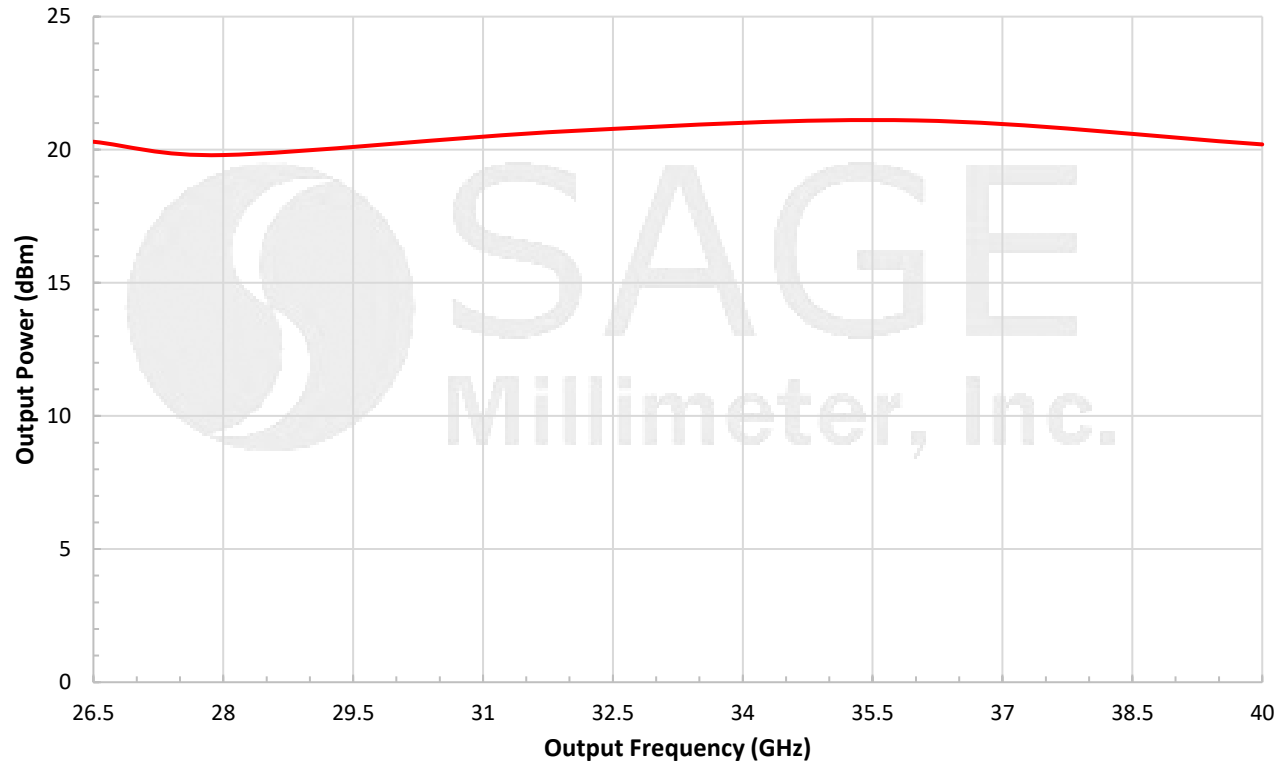

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

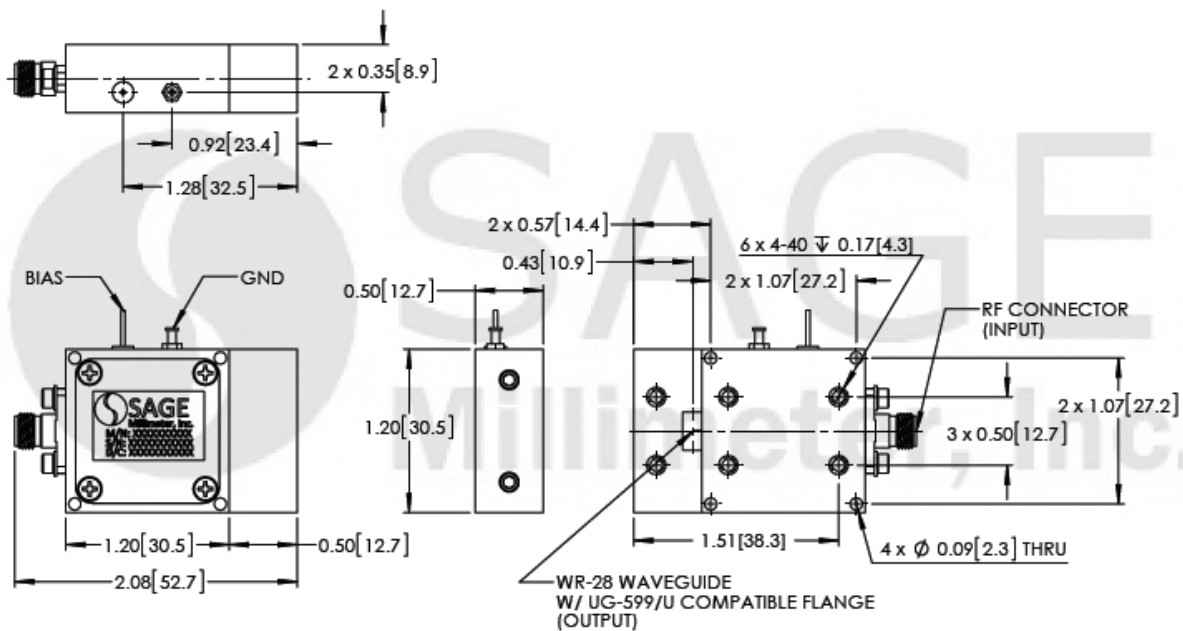



## Ka Band, X4 Active Frequency Multiplier, +20 dBm P<sub>out</sub>

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

### Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- The case temperature of the device shall never exceed +50°C. Use proper Heatsink or fan if necessary.

