

U-Band, X4 Active Frequency Multiplier, 40 to 60 GHz, +22 dBm P_{out}

Description:

Model SFA-403603422-19SF-E1 is an active X4 frequency multiplier. The multiplier has an input frequency of 10 to 15 GHz with a minimum input power of +0 dBm and an output frequency of 40 to 60 GHz with a typical output power of +22 dBm. The multiplier also has a typical harmonic suppression of -15 dBc. The DC power requirement for the multiplier is +8 V_{DC}/1 A. The input port configuration is a female SMA connector and the output is WR-19 Uni-Guide™ waveguide. Other port configurations are available under different model numbers.



Features:

- Full Waveguide Band Coverage
- Low Harmonic Components

Applications:

- 5G
- Frequency Extenders
- Source Module
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Input Frequency	10 GHz		15 GHz
Input Power		+0 dBm	+20 dBm
Output Frequency	40 GHz		60 GHz
Output Power		+22 dBm	
Harmonic Suppression		-15 dBc	
Spurious		-60 dBc	
Port Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+12 V _{DC}
DC Supply Current		1 A	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

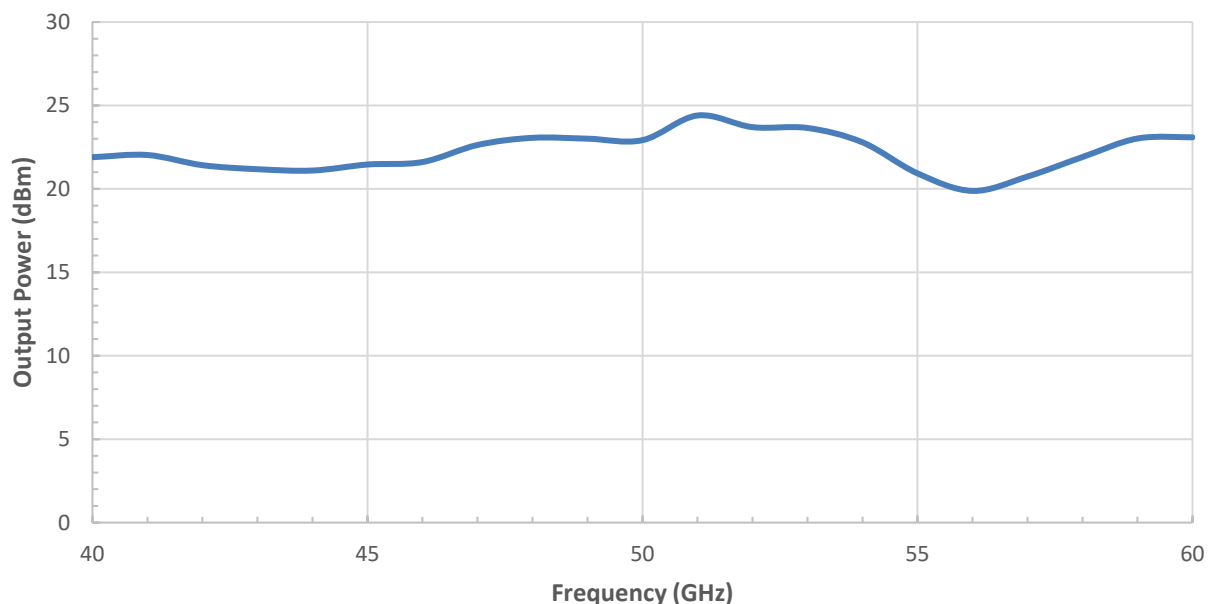
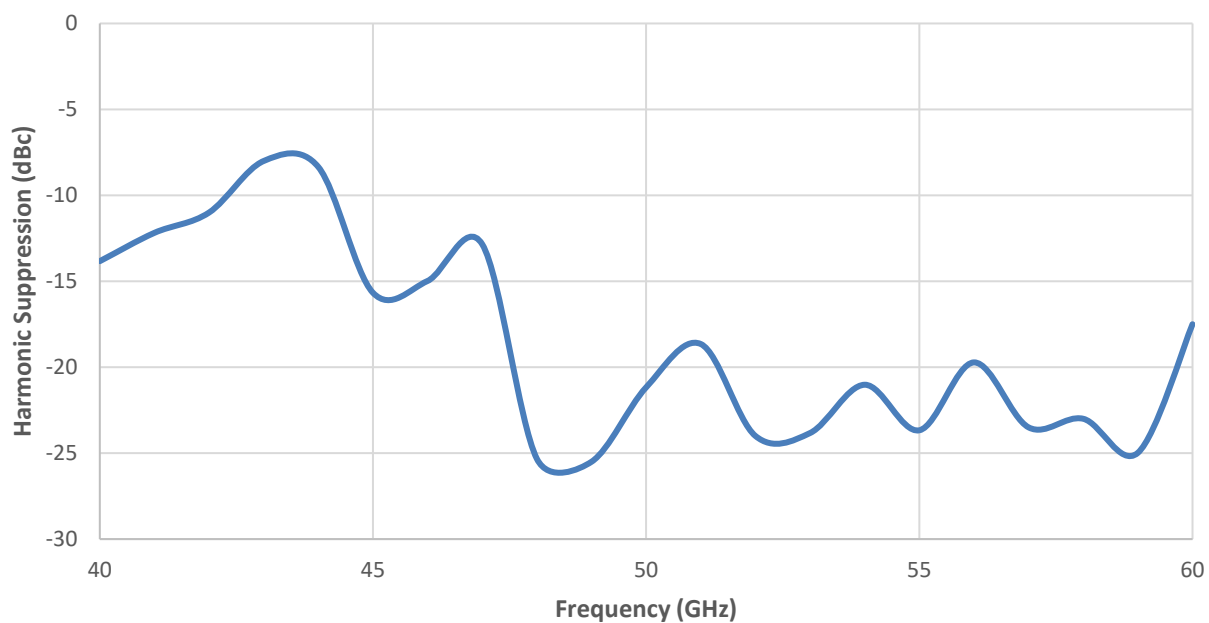
Mechanical Specifications:

Item	Specification
Input Port	SMA (F)
Output Port	WR-19 Uni-Guide™ Waveguide with UG-383/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.59" (L) X 1.20" (W) X 1.13" (H)
Outline	FA-SU-2CW-A



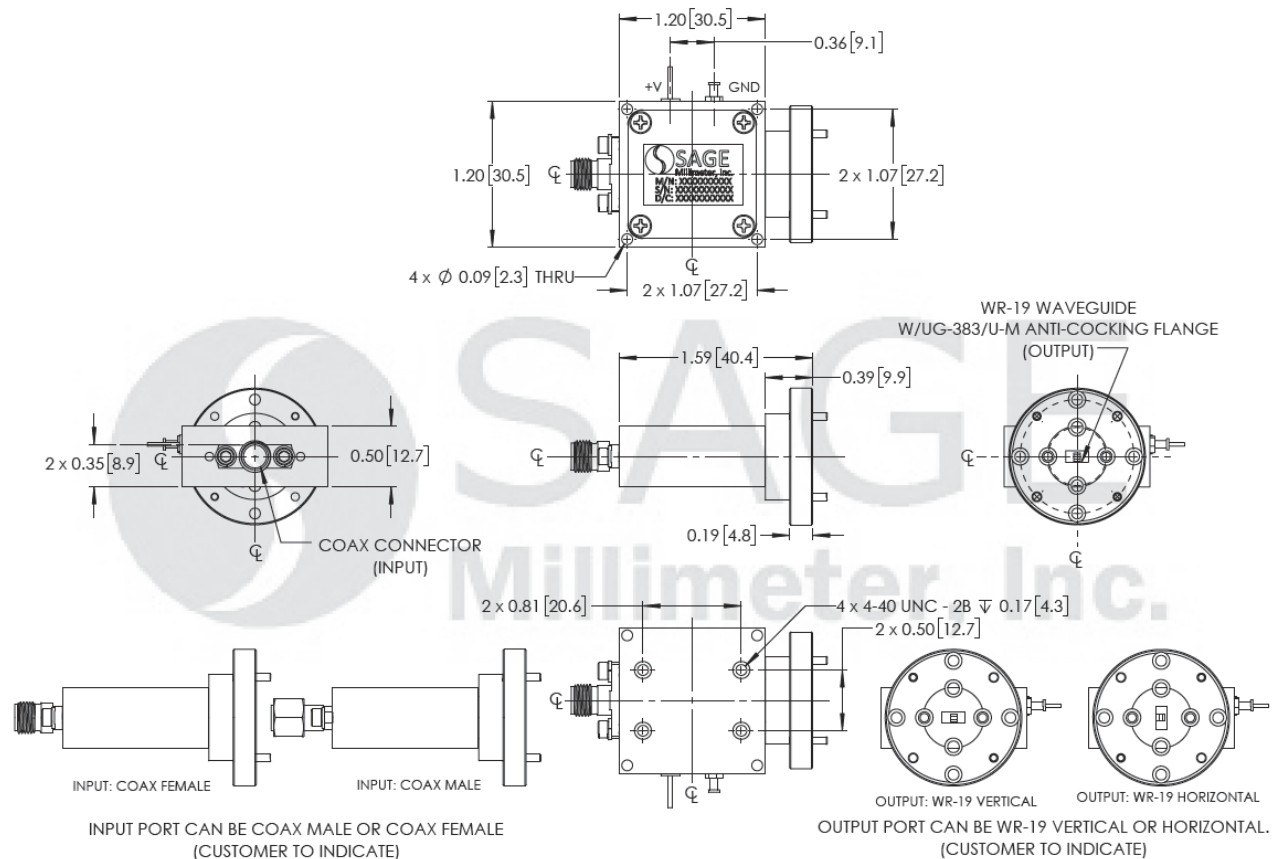
**U-Band, X4 Active Frequency Multiplier, 40 to 60 GHz, +22 dBm P_{out}****Output Power vs. Frequency**Bias: +8V_{DC}/ 1,080 mA ; Input Power = 0 dBm

RFsat: +8Vdc/ 1,400 mA

**Harmonic Suppression vs. Frequency**Bias: +8V_{DC}/1,080 mA; Input Power = 0 dBm

U-Band, X4 Active Frequency Multiplier, 40 to 60 GHz, +22 dBm P_{out}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])





U-Band, X4 Active Frequency Multiplier, 40 to 60 GHz, +22 dBm P_{out}

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- The active multiplier employs Eravant's trademarked and patent pending technology, the **Uni-Guide™**, as its output waveguide interface. The orientation of output waveguides can be specified through corresponding model numbers. For example, the model number for a horizontal output waveguide configuration would be **SFA-403603422-19HSF-E1** instead of the default **SFA-403603422-19SF-E1** which indicates vertical orientation output.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

