

## SFD-144224-103-05SF-P1

### G-Band Amplitude Detector, Small Signal, Positive

**SFD-144224-103-05SF-P1** is a G Band amplitude detector that can be used for full or narrow band applications. The detector is zero biased and intended for small signal detection purposes. With a distinct circuitry design and careful diode selection, the detector exhibits high sensitivity and extremely flat output characteristics across the full waveguide operating bandwidth. The detector is designed to have a 10 MHz video bandwidth and a 1 MΩ video output impedance.



#### Electrical Specifications:

| Parameter                                | Minimum | Typical   | Maximum |
|--|---------|-----------|---------|
| Frequency                                | 140 GHz |           | 220 GHz |
| Sensitivity*                             |         | 200 mV/mW |         |
| Sensitivity Flatness                     |         | ±2.0 dB   |         |
| RF Input Power                           |         | -20 dBm   |         |
| RF Power Handling                        |         |           | +17 dBm |
| Video Bandwidth**                        |         | 10 MHz    |         |
| Detection Speed, Rise Time (50 Ohm Load) |         | 10 ns     |         |
| Output Voltage Polarity                  |         | Positive  |         |
| Specification Temperature                |         | +25 °C    |         |
| Operating Temperature                    | -40 °C  |           | +85 °C  |

\*Note: The sensitivity is for the input signal level -20 dBm or below.

\*\*Note: The video bandwidth can extend up to 10 GHz.

#### Mechanical Specifications:

| Item          | Specification                                       |
|---------------|---|
| RF Port       | WR-05 Waveguide with UG-387/U-M Anti-Cocking Flange |
| DC Port       | SMA (F)   |
| Case Material | Aluminum  |
| Finish        | Gold Plated   |
| Weight        | 0.6 Oz  |
| Outline       | FD-G1-103-A   |

#### ECCN

EAR99

#### FEATURES

- Full Waveguide Band Operation
- High Sensitivity Without Tuning
- High Sensitivity Stability Over Broad Temperature Range

#### APPLICATIONS

- Radar Systems
- Communication Systems
- Test Instrumentations


#### SUPPLEMENTAL DETAILS




SFD-144224-103-05SF-P1

Typical Sensitivity vs. Frequency

$P_{in} = -20 \text{ dBm}$

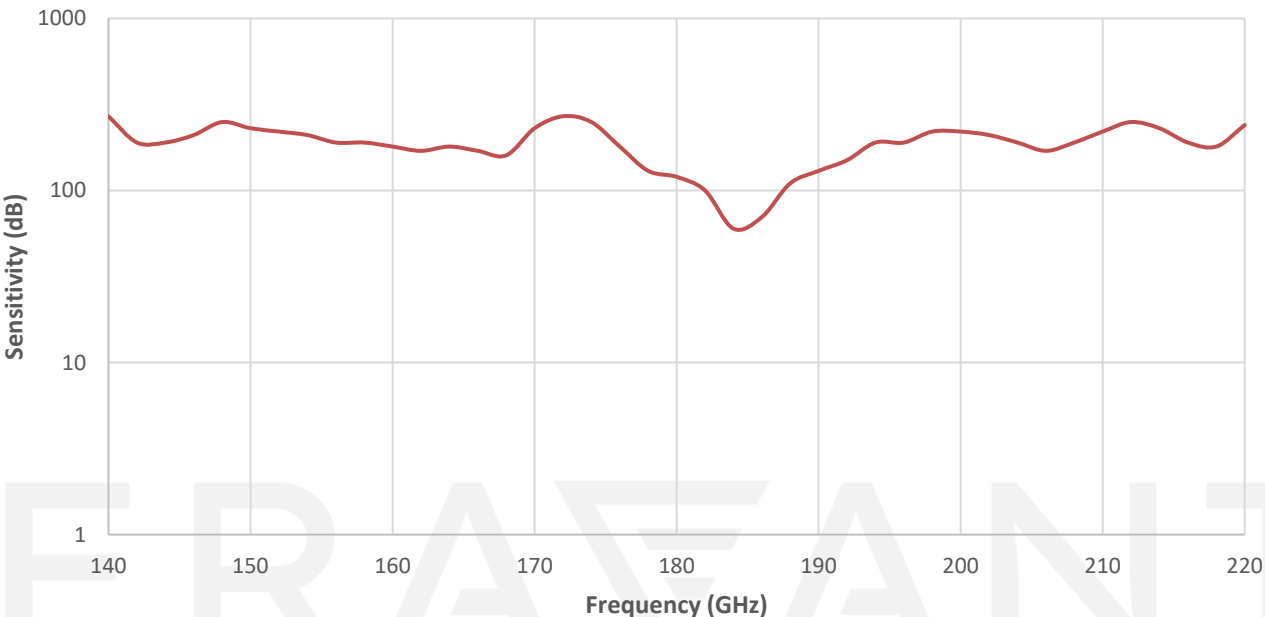

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

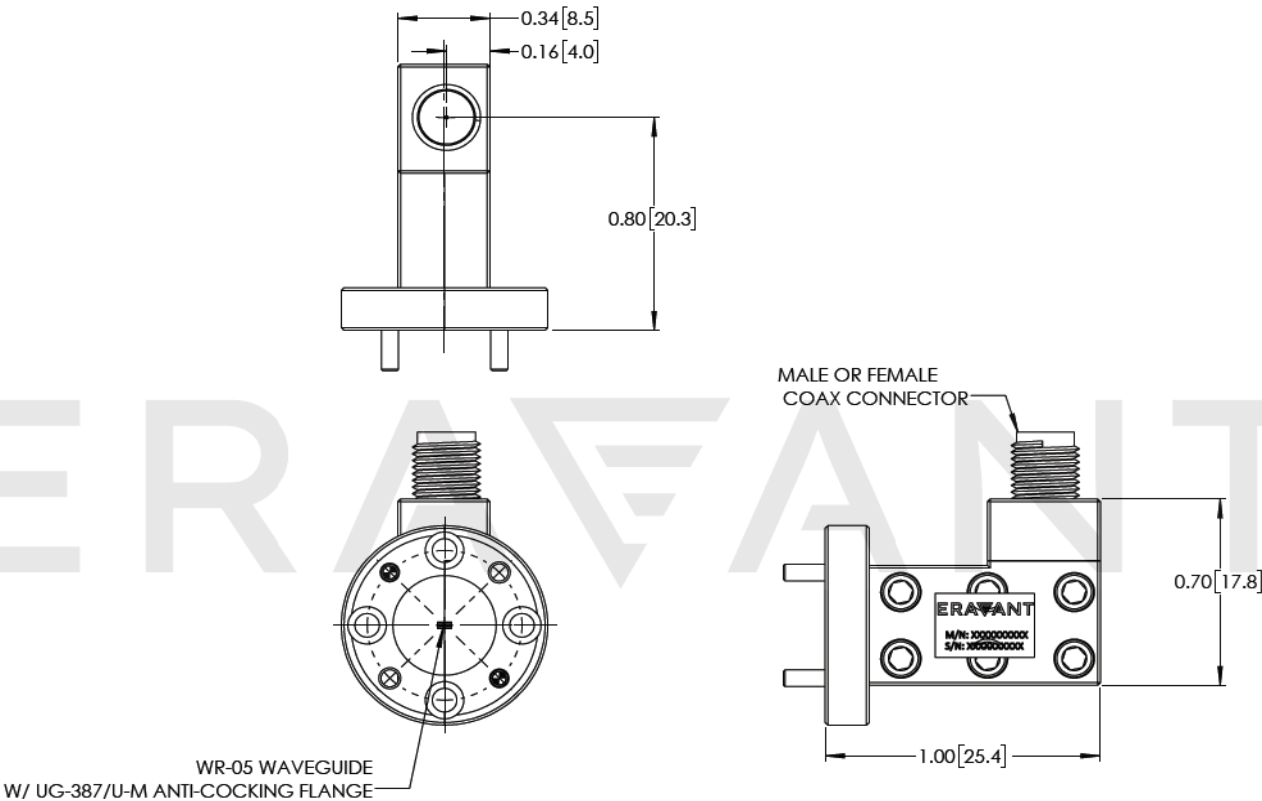

**NOTE:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- The negative output voltage polarity is offered under the model number SFD-144224-103-05SF-N1.
- The amplitude detector is a small signal detector. The sensitivity shown is for RF signal -20 dBm or lower.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Exceeding absolute maximum ratings will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Any foreign objects in the waveguide will cause performance degradation and can possibly damage the device.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model SCH-08008-S1 is highly recommended

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE