

SFH-19SFSF-A3

U-Band Harmonic Mixer, Keysight Spectrum Analyzer

SFH-19SFSF-A3 is a U-Band balanced harmonic mixer that is specially designed for use with Keysight's spectrum analyzer series. The mixer employs high performance, GaAs Schottky diodes and a balanced configuration to produce superior RF performance. With an IF range of DC to 1.3 GHz, the harmonic mixer uses the harmonic number 10 of a 3.0 to 6.1 GHz LO at +16 dBm to translate 40 to 60 GHz. The harmonic mixer has a conversion loss of 35 dB. The mixer can be used as other even harmonic numbers, such as 6, 8 and 12, etc. with various conversion loss performance. In general, the lower the harmonics, the lower the conversion loss.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	40 GHz		60 GHz
LO Frequency	3.0 GHz		6.1 GHz
IF Range	DC		1.3 GHz
RF Power		-20 dBm	+19 dBm
LO Power		+16 dBm	+19 dBm
Harmonic Number		10	
Conversion Loss		35 dB	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Item	Specification
RF Port	WR-19 Waveguide with UG-383/U-M Anti-Cocking Flange
LO Port	SMA (F)
IF Port	SMA (F)
Case Material	Brass
Finish	Gold Plated
Weight	5.5 Oz
Outline	FH-U2-A

ECCN

EAR99

FEATURES

- Full Waveguide Band Operation
- No External Bias Required
- Even Harmonic Detection
- Calibrated for 10th Harmonic Detection

APPLICATIONS


- Keysight Spectrum Analyzers
- Frequency Meters
- Phase Locked Loops

SUPPLEMENTAL DETAILS




SFH-19SFSF-A3

Typical Conversion Loss vs. Frequency

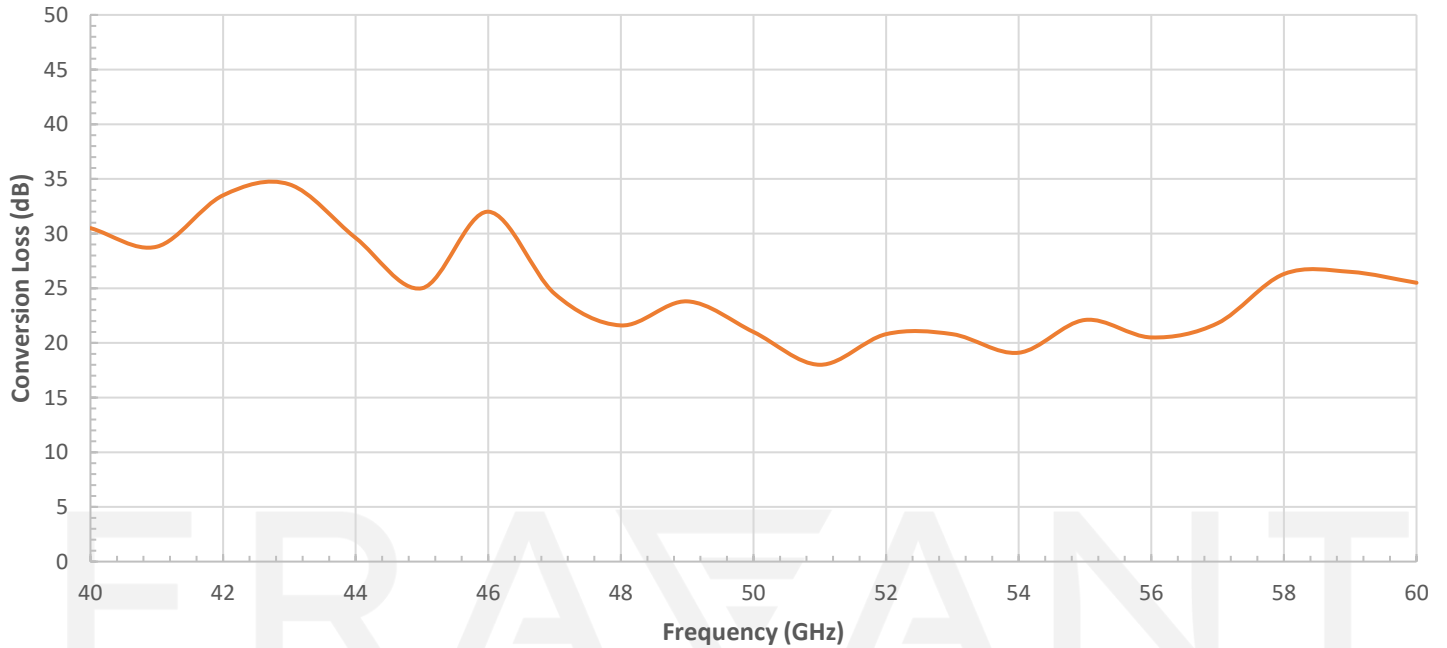

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

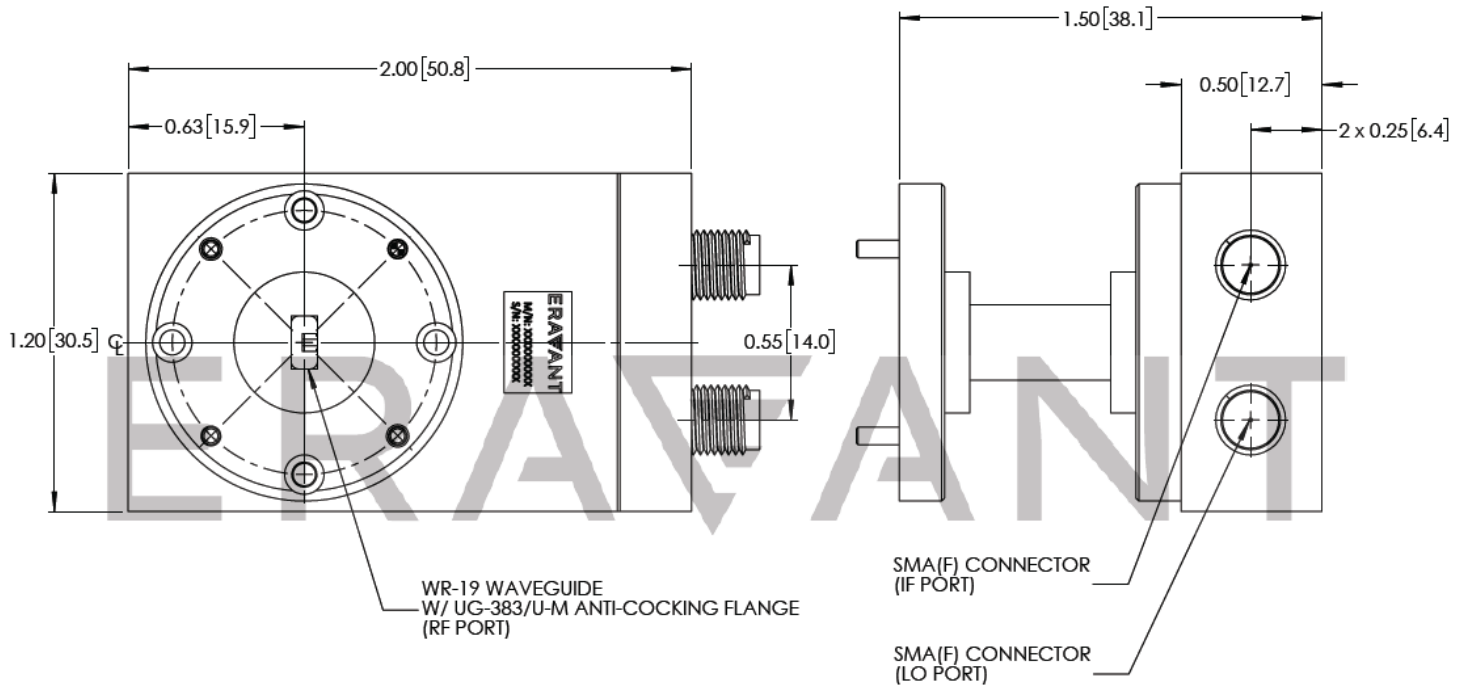

NOTE:

- Data provided is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C room temperature.
- The harmonic mixer is for small signal detection. The recommended the RF power range is -10 dBm or below.
- The harmonic mixer work in any even harmonics of LO to yield the IF frequency in the range of DC to 1.3 GHz with different conversion loss.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings of the mixer will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- The mixer is a static sensitive device. Always follow ESD rules when working with the mixer.
- Eravant recommends the use of ESD wrist and ankle straps, grounded ESD dissipative surfaces, and air ionizers when handling the device
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE