

SOP-34310115-KM-BB

Phase Locked Oscillator, 34 GHz, +15 dBm, Combined Internal and External Reference

SOP-34310115-KM-BB is a phase locked oscillator based on a high performance DRVCO (Dielectric Resonator Voltage Controlled Oscillator) technology to generate a clean and high-quality microwave signal. The oscillator has a built-in 100 MHz internal reference crystal oscillator. The oscillator is designed and fabricated to be phase locked to the internal reference oscillator automatically if the 10 MHz external reference is absent. The oscillator delivers a typical output power of +15 dBm and has a nominal harmonic and spurious levels of -25 dBc and -75 dBc, respectively. The oscillator has a built-in voltage regulator to further improve the signal quality and prevent possible damage due to the over voltage operation. The oscillator is hermetically sealed to offer the maximum environmental performance.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency		34 GHz	
Output Power		+15 dBm	
Phase Noise (Internal Reference)		-85 dBc/Hz @ 10 kHz	
		-95 dBc/Hz @ 100 kHz	
		-120 dBc/Hz @ 1 MHz	
Internal Reference Frequency		100 MHz	
External Reference Frequency		10 MHz	
External Reference Input Power	-3 dBm	0 dBm	+3 dBm
Sub-Harmonics			-60 dBc
Harmonics		-25 dBc	-20 dBc
Spurious		-75 dBc	-70 dBc
Phase Locked Indicator (LOCK)		TTL "High"	
Phase Error Voltage (V_{τ})		0 to +10 V _{DC}	
DC Bias		+12 V _{DC} /550 mA	
Frequency Stability		±5 ppm	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+70°C

ECCN

EAR99

FEATURES

- High Output Power
- Low Phase Noise
- Low Harmonic Components

APPLICATIONS

- Radar Systems
- Communication Links
- Transmitters/Receivers

SUPPLEMENTAL DETAILS




SOP-34310115-KM-BB

Mechanical Specifications:

Item	Specification
RF Output	2.92 mm K (M) Connector
REF Input	SMA (F) Connector
REF Output	SMA (F) Connector
DC Bias Port (V _{CC})	Feedthru Pin
Phase Locke Indicator Port (LD)	Feedthru Pin
Phase Error Voltage Port (V _T)	Feedthru Pin
Case Material	Aluminum
Finish	Nickel Plated and Bare Aluminum
Package	Hermetically Sealed
Weight	4.0 Oz
Size	2.25" (L) X 2.25" (W) X 1.41" (H)
Outline	OP-EC-SM1

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

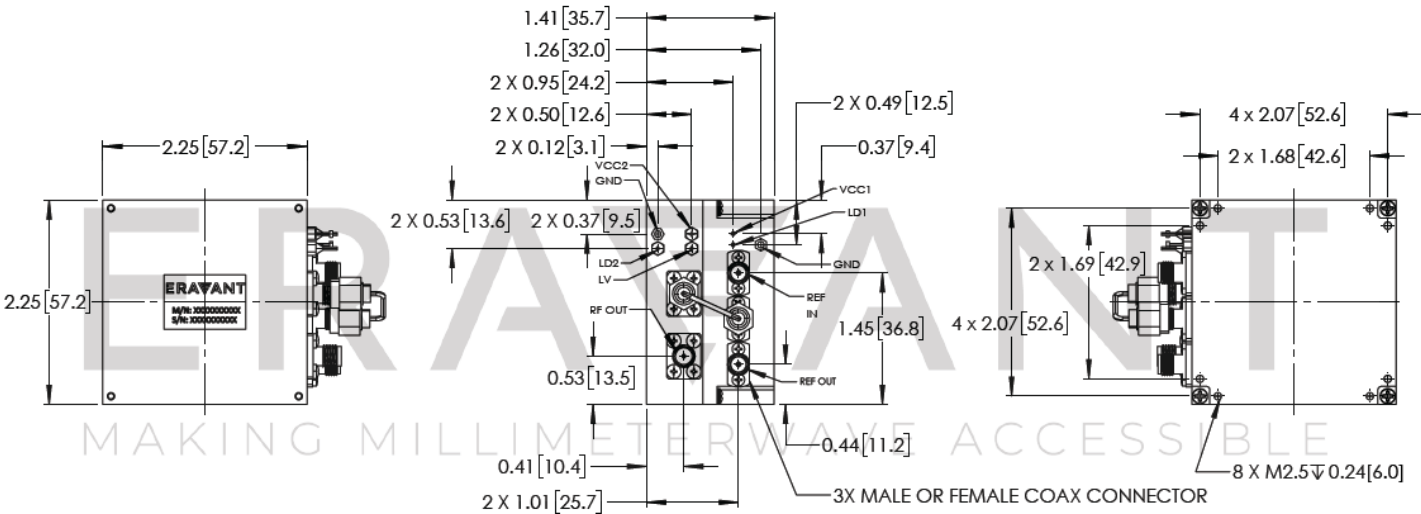

NOTE:

- Other mechanical configurations are available under different model number.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed **+70 °C**. Use additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**